

TURBF-21G121G9K

TURBF-21G121G9K is a coaxial bandpass filter with a passband frequency from 21.1 to 21.9 GHz and a center frequency is 21.5 GHz. The nominal insertion loss of the filter is 7.0 dB and the typical rejection is 40 dB.

Features:

- Passband Frequency Range 21.1 to 21.9 GHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts
- Field Replaceable RF Connectors

Applications:

- Instrumentations
- Radar Systems
- System Integrations




电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency range	21.1		21.9	GHz
通带插损 Passband Insertion Loss		7.0		dB
带内波动 Pass Band Ripple		±1.4		dB
带外抑制 Rejection	40@19.9GHz&22.5GHz			dB
耐受功率 Power Handling		1		W
回波损耗 Return Loss		16		dB
阻抗 Impedance	50			Ohms

环境和机械特性 Envrionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temerature	-55 To +125	℃
存储温度 Storage Temerature	-65 to +150	℃
接口 Connectors	2.92mm	
重量 Weight	/	g

外形图 Outline Drawing: Unit:mm

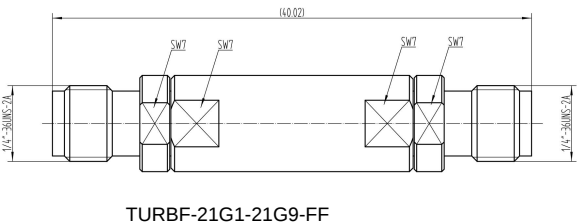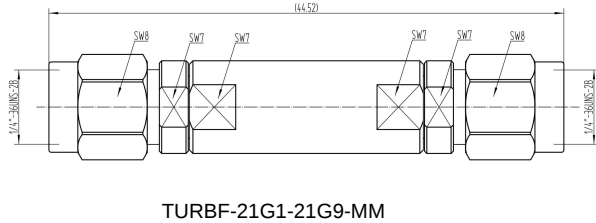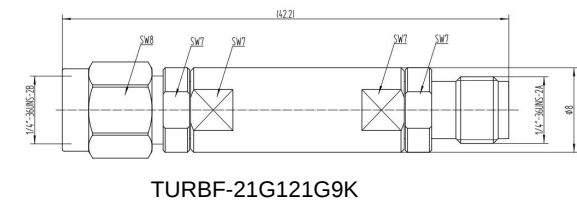



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TURBF-21G121G9K	Coaxial Bandpass Filter,Passband frequency range:21.1-21.9GHz,Passband Insertion Loss:7.0dB, 2.92mm Male/2.92mm Female Coaxial Fixed Termination	Rev.1.1
TURBF-21G1-21G9-MM	Coaxial Bandpass Filter,Passband frequency range:21.1-21.9GHz,Passband Insertion Loss:7.0dB, 2.92mm Male Coaxial Fixed Termination	Rev.1.1
TURBF-21G1-21G9-FF	Coaxial Bandpass Filter,Passband frequency range:21.1-21.9GHz,Passband Insertion Loss:7.0dB, 2.92mm Female Coaxial Fixed Termination	Rev.1.1