



U-Band, Active Frequency Multiplier

WR-19/X4/ 40-60GHz /16dBm Output Power

TMAM-040060-0415-19

TURAM-040060041519 is an active X4 frequency multiplier. The multiplier has an input frequency of 10 to 15 GHz with a typical input power of +5 dBm and an output frequency of 40 to 60 GHz with a typical output power of +16 dBm. The DC power requirement for the multiplier is +12 V DC/180 mA. The input port configuration is a female SMA connector and the output is a WR-19 waveguide with a UG-383/U-M anti-cocking flange.

Features:

- Output Frequency:40-60GHz
- Output Power :16dBm Min
- Low power consumption

Applications:

- Frequency Extenders
- THz Systems

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
输出频率 Output Frequency	40		60	GHz
输出功率 Output Power	16			dBm
输入频率 Input Frequency	10		15	GHz
输入功率 Input Power	3	5	7	dBm
倍频次数 Multiply Factor		4		
谐波抑制 Harmonic Suppression			-30	dBc
供电电压 DC Voltage		12		V
供电电流 DC Supply Current		180		mA


机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输出接口 Output Connector	WR-19/UG-383/U	
输入接口 Input Connector	SMA Female	

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+12 V
输入功率 RF Input Power	+10 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形图 Outline Drawing: Unit:mm

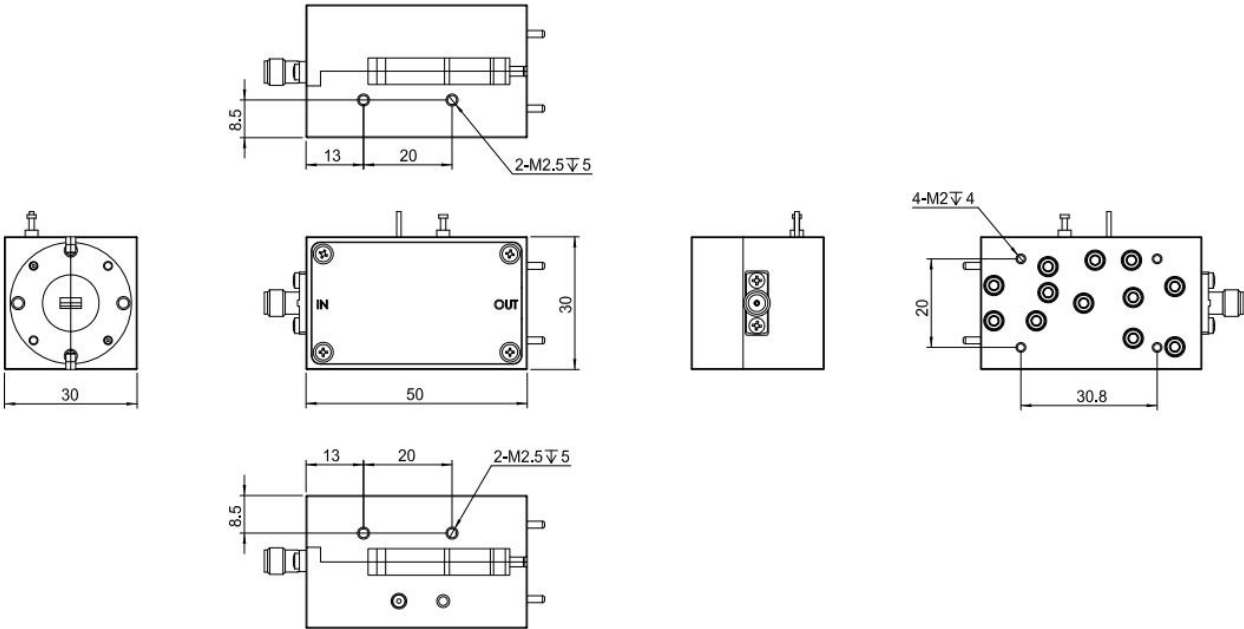


温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-10		+65	℃
存储温度 Non-operating Temperature	-45		+85	℃
相对湿度 Relative humidity		95		%
海拔 Altitude	50,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			


订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TURAM-040060041519	Active Multiplier,X4,40-60GHz, Output Power:16dBm,WR-19/UG-383/U,SMA Female	Rev.1.1

典型曲线 Typical Performance Data:

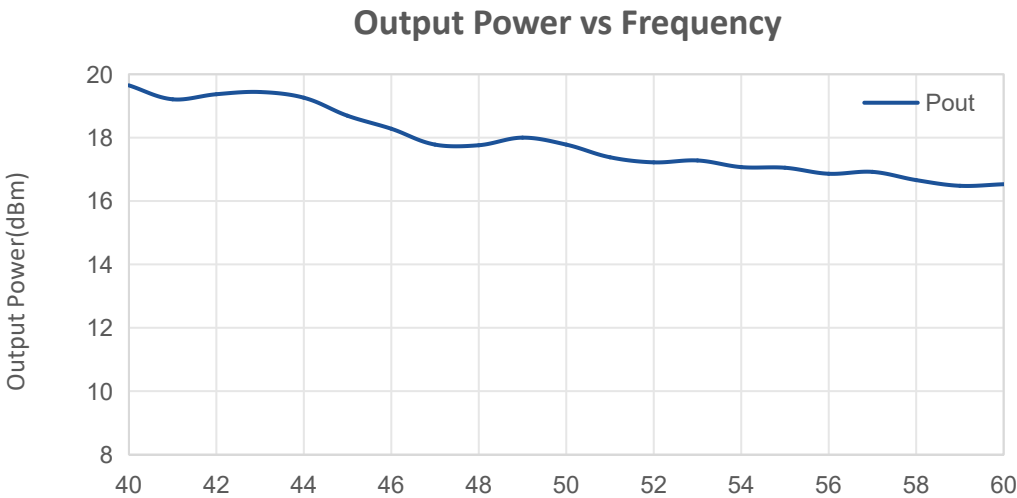

典型曲线 Typical Performance Data:

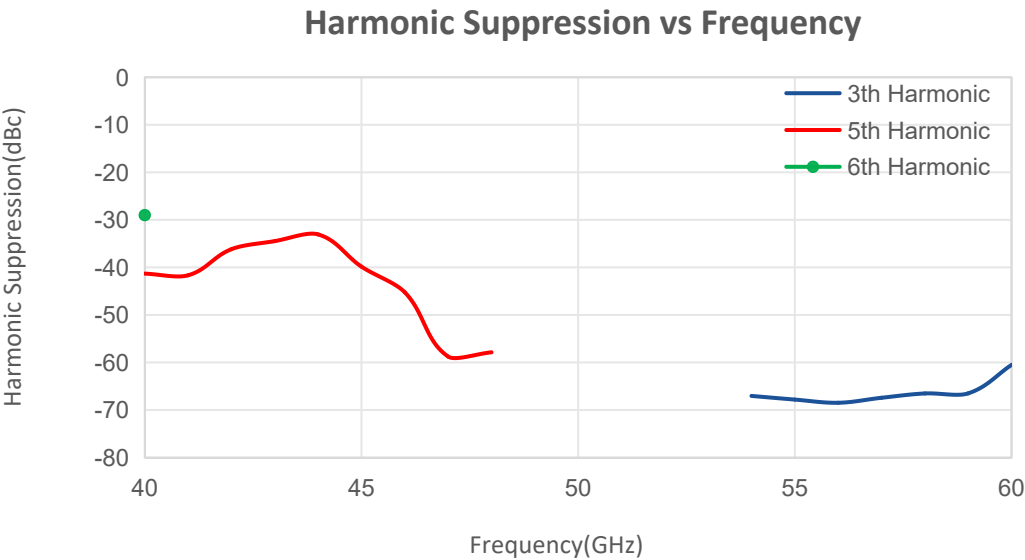

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.