

## Low Noise Amplifier

50KHz-53GHz/5.0dB NF/12dB Gain/15dBm P1dB

TLLA50K53G-12-50

TURLA50K53G-1250 is a low noise amplifier with a typical small signal gain of 12 dB and a nominal noise figure of 5.0 dB across the frequency range of 50 KHz to 53 GHz. The DC power requirement for the amplifier is +8 V DC/160 mA. The input and output port configuration offers coax adapter structure with 2.4mm female.

### Features:

- Frequency range: 50KHz-53GHz
- Gain: 12dB Typ
- Noise Figure: 5.0dB Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

### Applications:

- Communication systems

### 电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	50KHz-53GHz			
小信号增益 Small Signal Gain		12		dB
增益平坦度 Gain Flatness		±4.0		dB
噪声系数 Noise Figure*		5.0		dB
线性输出功率 Output P1dB		15		dBm
输出三阶交调 Output IP3		20		dBm
输入驻波 Input VSWR		2		:1
输出驻波 Output VSWR*		2		:1
直流电压 DC Voltage	+5	+8		V DC
直流电流 DC Supply Current		160		mA
阻抗 Impedance	50			Ohms

\*Performance may degrade below 300 MHz. Please refer to below typical test plots


### 机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	2.4mm Female/2.4mm Female	


## 绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+12 V
输入功率 RF Input Power	+10 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

## 外形图 Outline Drawing: Unit:mm

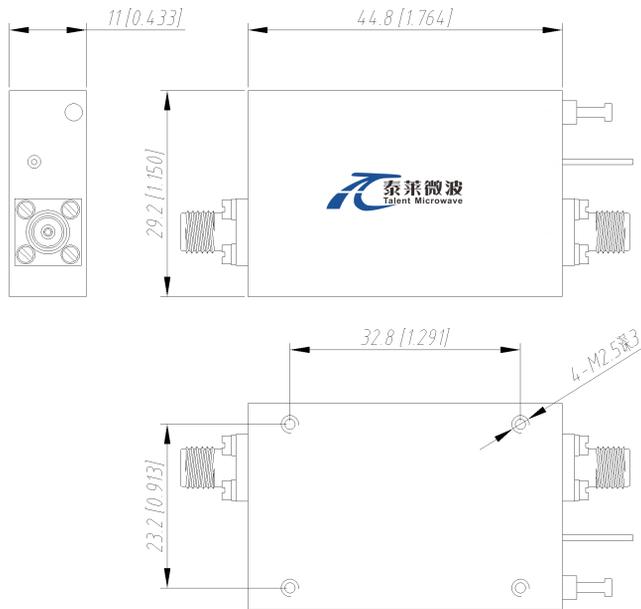

**\*\*\*Heat Sink Required During Operation**

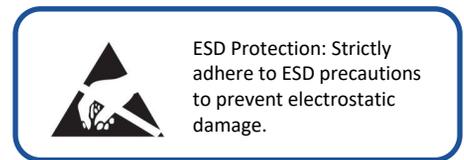

## 温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-45		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude		10,000		feet


震动 Shock / Vibration(MIL-STD-810F) 25g rms (15 degree 2KHz) endurance, 1 hour per axis

### 订货信息 Ordering Information:


标准型号 Base Number	描述 Description	版本号 Revision
TURLA50K53G-1250	Low Noise Amplifier, 50KHz-53GHz, Noise Figure:5.0dB, Gain:12 dB,P1dB:15dBm,+8V DC,Without Heatsink	Rev.1.1
TURLA50K53G-1250 HS	Low Noise Amplifier, 50KHz-53GHz, Noise Figure:5.0dB, Gain:12 dB,P1dB:15dBm,+8V DC,With Heatsink	Rev.1.1

### 典型曲线 Typical Performance Data:

#### Gain&VSWR vs Frequency

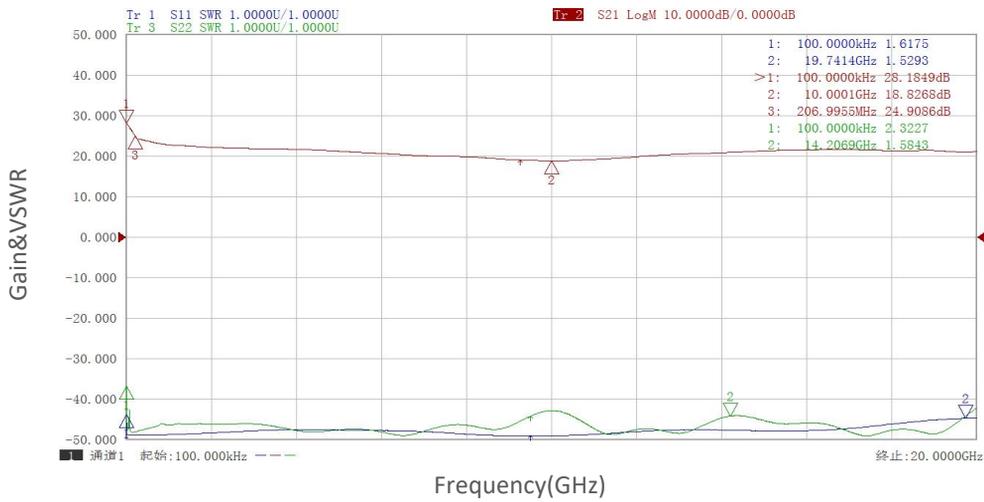


#### Gain&VSWR vs Frequency

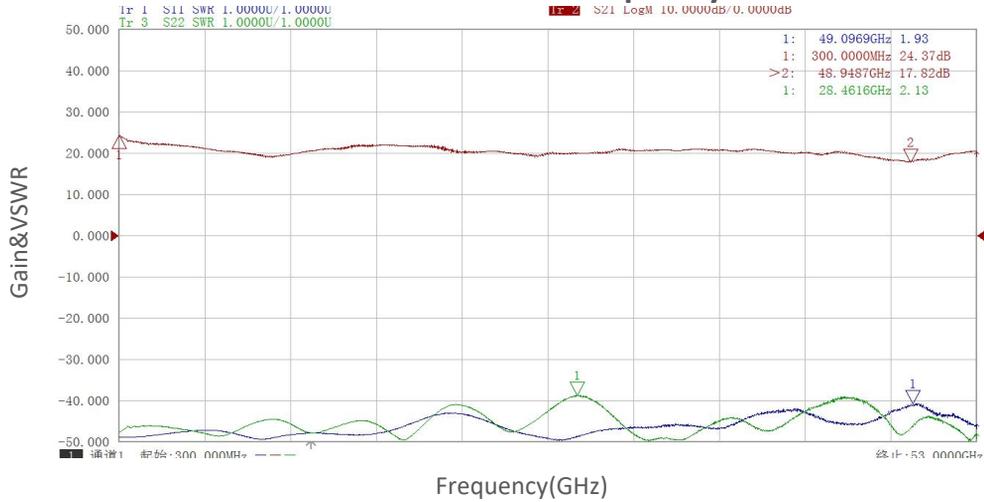


Note: Above data is for ref only, actual data may vary from unit to unit depending

## 典型曲线 Typical Performance Data:

### Noise Figure vs Frequency

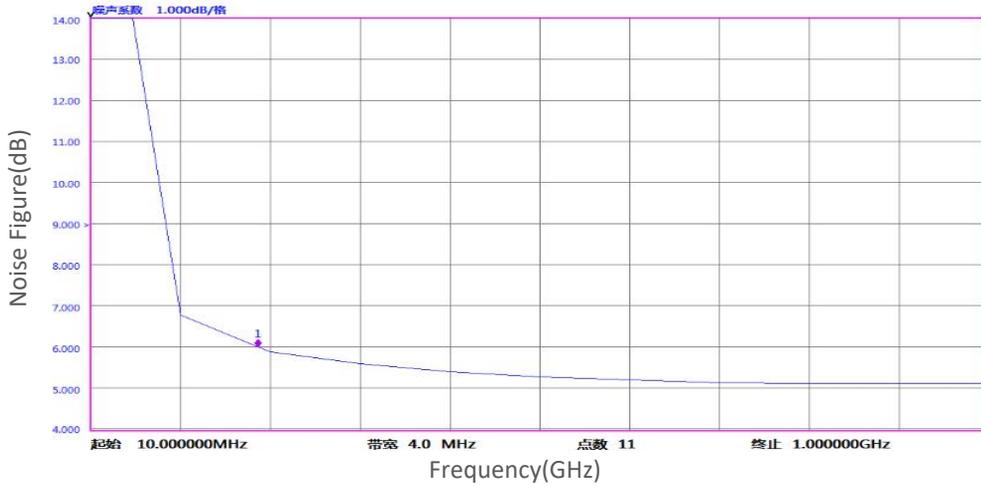

### Noise Figure vs Frequency

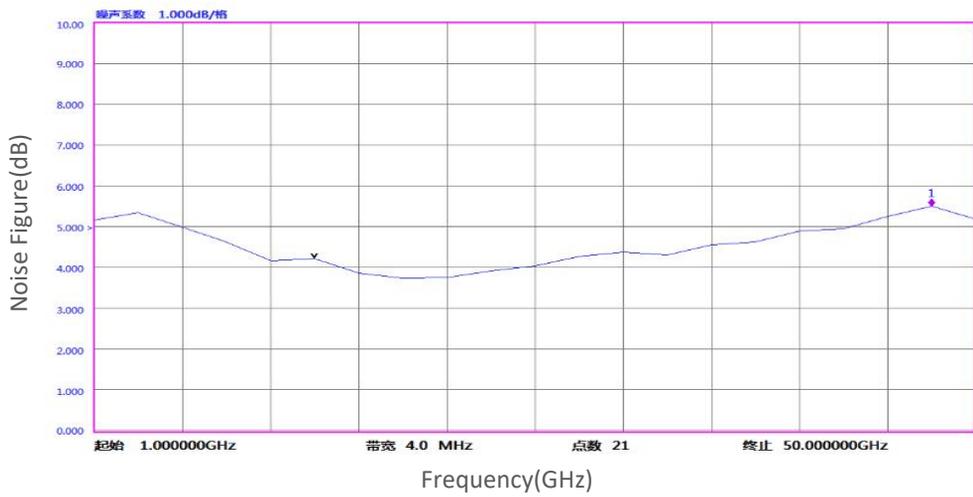


### Gain vs Output Power


Gain(dB)

## 典型曲线 Typical Performance Data:

### P1dB vs Frequency

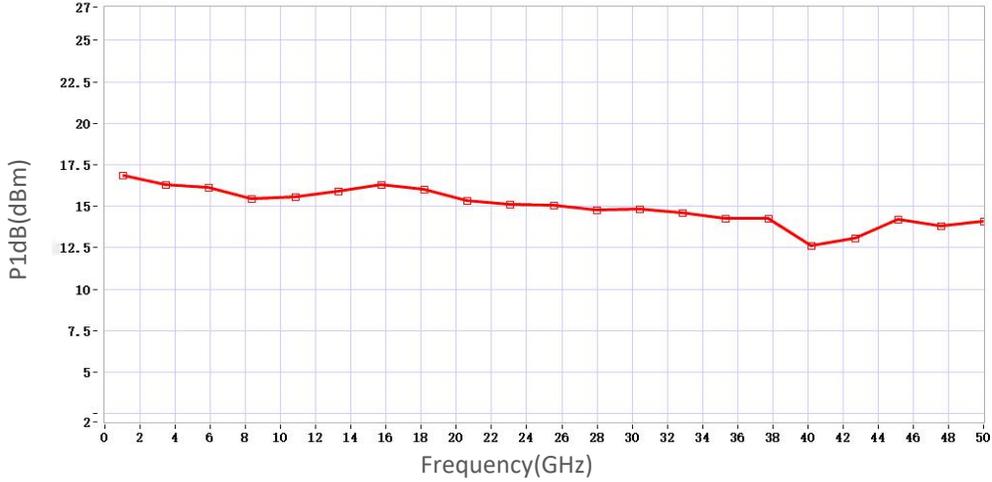

### P3dB vs Frequency

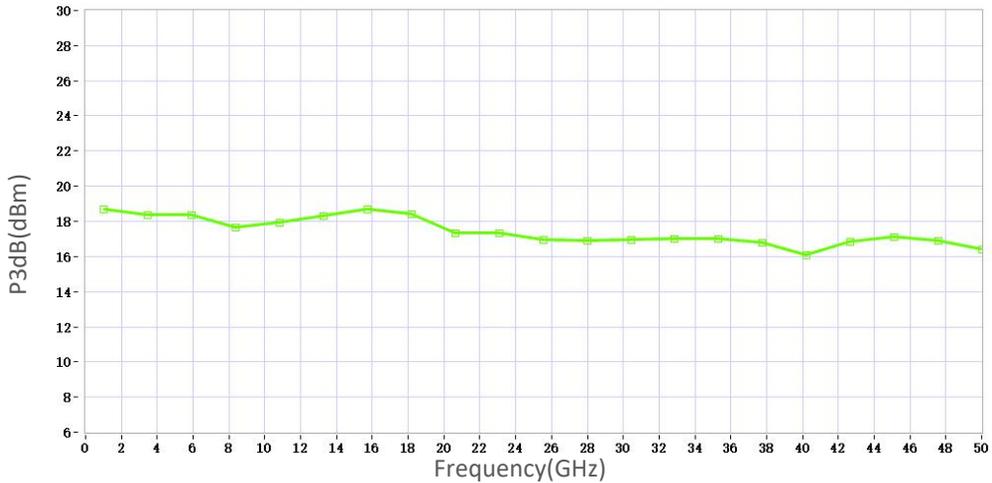

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.