

## Low Noise Amplifier

4-8GHz/2.0dB NF/25dB Gain/12dBm P1dB

TLLA4G8G-25-20

TURLA4G8G-2520 is a low noise amplifier with a minimum small signal gain of 25 dB and a nominal noise figure of 2.0 dB across the frequency range of 4 to 8 GHz. The DC power requirement for the amplifier is +12 V DC/30 mA. The input and output port configuration offers coax adapter structure with SMA female.

### Features:

- Frequency range: 4-8GHz
- Gain: 25dB Min
- Noise Figure: 2.0dB Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

### Applications:

- Communication systems

## 电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	4		8	GHz
小信号增益 Small Signal Gain	25			dB
增益平坦度 Gain Flatness		±2.0		dB
噪声系数 Noise Figure		2.0		dB
线性输出功率 Output P1dB	12			dBm
输入驻波 Input VSWR		2.0		:1
输出驻波 Output VSWR		2.0		:1
直流电压 DC Voltage	+8	+12	+15	V DC
直流电流 DC Supply Current		30		mA
阻抗 Impedance		50		Ohms


## 机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	
直流偏置 DC Bias	Solder Pin	

## 绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+15V
输入功率 RF Input Power	+15 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

## 外形图 Outline Drawing: Unit:mm

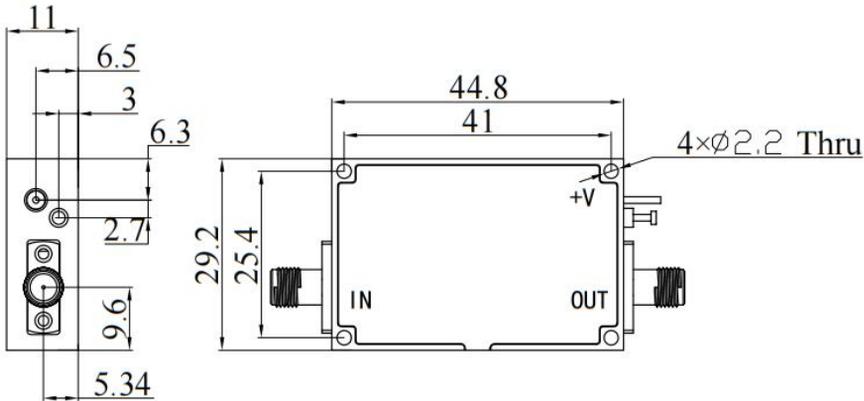

**\*\*\*Heat Sink Required During Operation**



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

## 温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-45		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude		10,000		feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			

## 订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TURLA4G8G-2520	Low Noise Amplifier, 4-8GHz, Noise Figure:2.0dB, Gain:25dB,P1dB:12dBm,+12V DC,Without Heatsink	Rev.1.1
TURLA4G8G-2520 HS	Low Noise Amplifier, 4-8GHz, Noise Figure:2.0dB, Gain:25dB,P1dB:12dBm,+12V DC,With Heatsink	Rev.1.1