

TURLA6G18G-2840

TURLA6G18G-2840 is a low noise amplifier with a typical small signal gain of 28 dB and a nominal noise figure of 4.0 dB across the frequency range of 6 to 18 GHz. The DC power requirement for the amplifier is +12 V DC/750 mA. The input and output port configuration offers coax adapter structure with SMA female.

Features:

- Frequency range: 6-18GHz
- Gain: 28dB Typ
- Noise Figure: 4.0dB Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Communication systems

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	6		18	GHz
小信号增益 Small Signal Gain		28		dB
增益平坦度 Gain Flatness		±1.5		dB
噪声系数 Noise Figure		4	6	dB
线性输出功率 Output P1dB	27	28		dBm
饱和输出功率 Output Psat		29		dBm
输入驻波 Input VSWR		2		:1
输出驻波 Output VSWR		2		:1
直流电压 DC Voltage	+10	+12	20	V DC
直流电流 DC Supply Current		750		mA
阻抗 Impedance	50			Ohms


机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+20 V
输入功率 RF Input Power	+10 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形图 Outline Drawing: Unit:mm

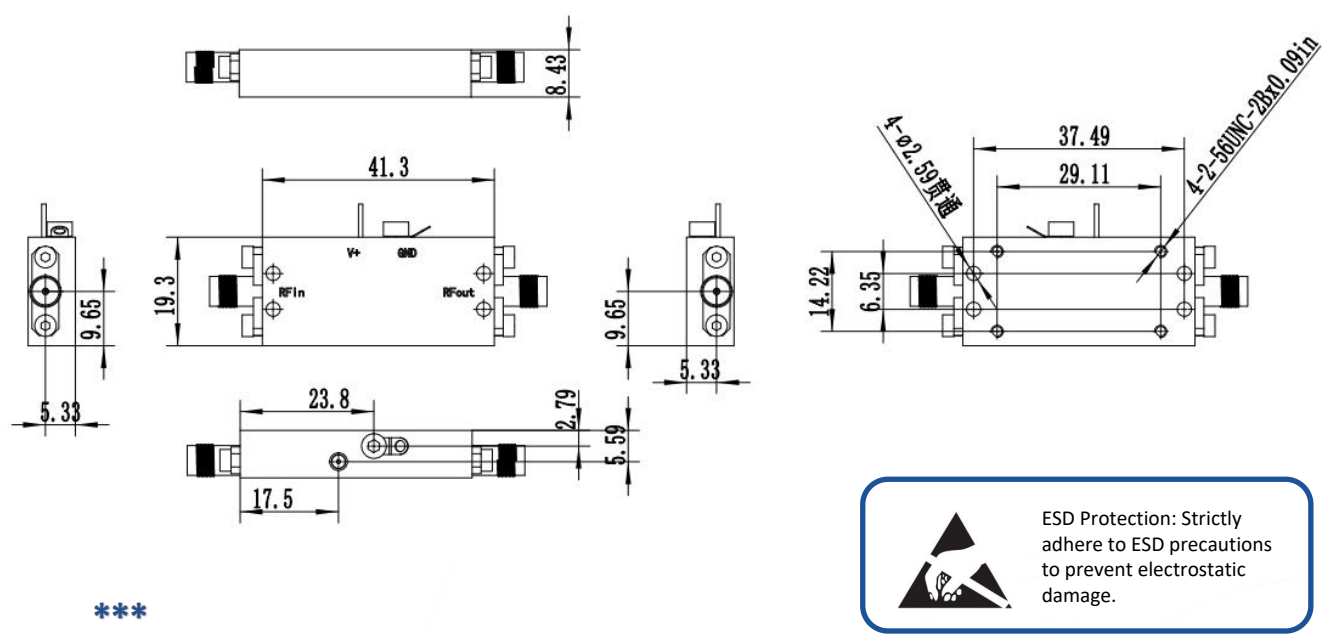

温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-45		+85	℃
存储温度 Non-operating Temperature	-55		+125	℃
相对湿度 Relative humidity		95		%
海拔 Altitude		10,000		feet

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TURLA6G18G-2840	Low Noise Amplifier, 6-18GHz, Noise Figure:4.0dB, Gain:28 dB,P1dB:28dBm,+12V DC,Without Heatsink	Rev.1.1
TURLA6G18G-2840 HS	Low Noise Amplifier, 6-18GHz, Noise Figure:4.0dB, Gain:28 dB,P1dB:28dBm,+12V DC,With Heatsink	Rev.1.1