

Low Noise Amplifier

18-50GHz/5.0dB NF/42dB Gain/13dBm P1dB

TLLA18G50G-42-50

TURLA18G50G-4250 is a low noise amplifier with a typical small signal gain of 42 dB and a nominal noise figure of 5.0 dB across the frequency range of 18 to 50 GHz. The DC power requirement for the amplifier is +5 V DC/280 mA. The input and output port configuration offers coax adapter structure with 2.4mm female.

- Features:
- Frequency range: 18-50GHz
 - Gain: 42dB Typ
 - Noise Figure: 5.0dB Typ
 - Good Power and Gain Flatness
 - 50 Ohm Matched Input / Output

- Applications:
- Communication systems

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	18		50	GHz
小信号增益 Small Signal Gain	40	42		dB
增益平坦度 Gain Flatness		±2.5		dB
噪声系数 Noise Figure		5		dB
线性输出功率 Output P1dB	13	14		dBm
饱和输出功率 Output Psat		15		dBm
输入驻波 Input VSWR		2		:1
输出驻波 Output VSWR		2		:1
直流电压 DC Voltage		+5	+6	V DC
直流电流 DC Supply Current		280		mA
阻抗 Impedance	50			Ohms


机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	2.4mm Female/2.4mmFemale	

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+6 V
输入功率 RF Input Power	+5 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形图 Outline Drawing: Unit:mm

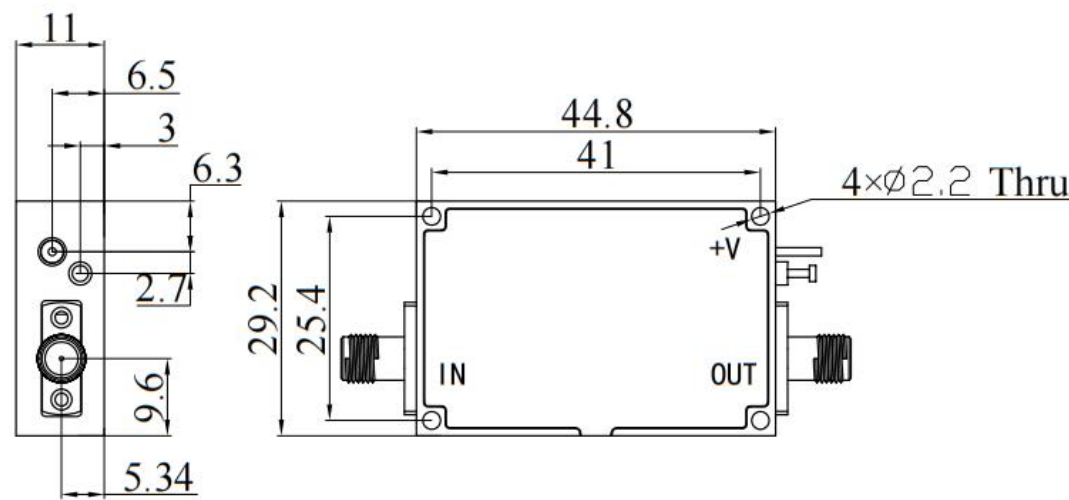

***Heat Sink Required During Operation



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.



温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-45		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude		50,000		feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			




订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TURLA18G50G-4250	Low Noise Amplifier, 18-50GHz, Noise Figure:5.0dB, Gain:42dB,P1dB:13dBm,+5V DC,Without Heatsink	Rev.1.1
TURLA18G50G-4250 HS	Low Noise Amplifier, 18-50GHz, Noise Figure:5.0dB, Gain:42dB,P1dB:13dBm,+5V DC,With Heatsink	Rev.1.1


典型曲线 Typical Performance Data:

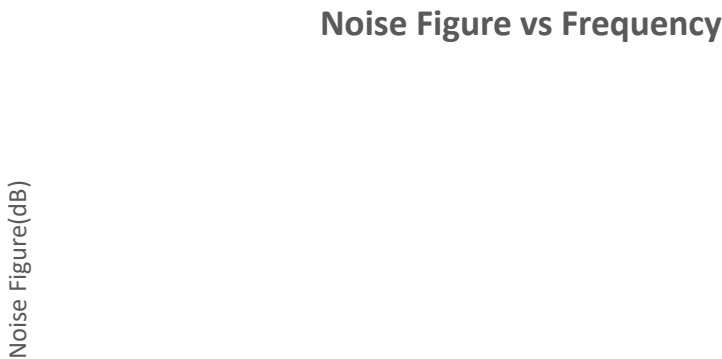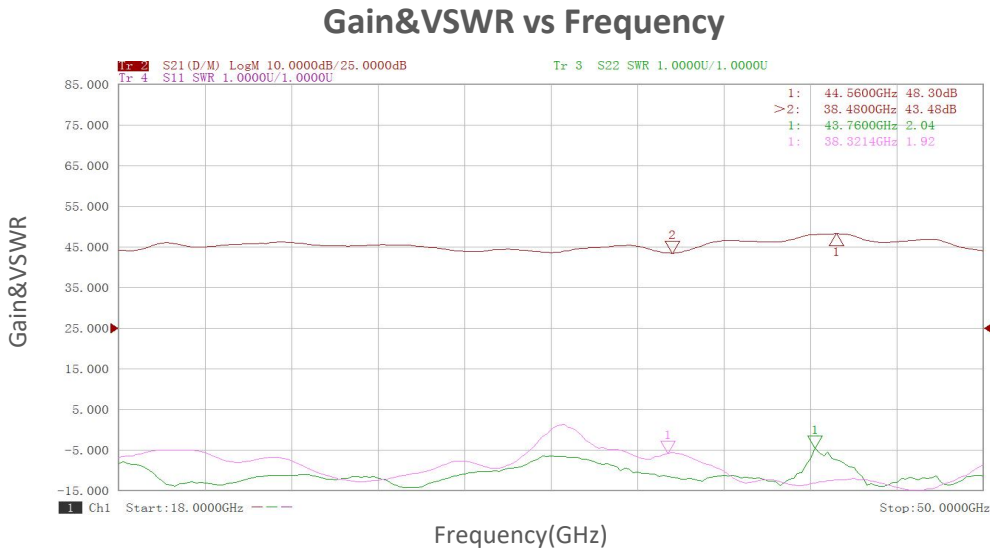

典型曲线 Typical Performance Data:

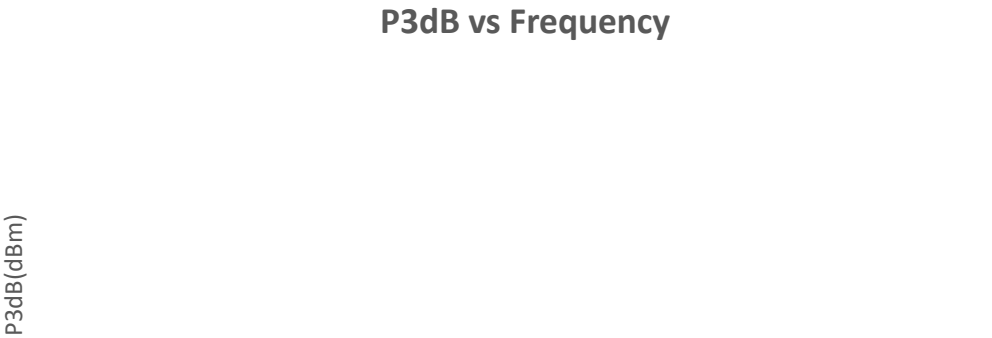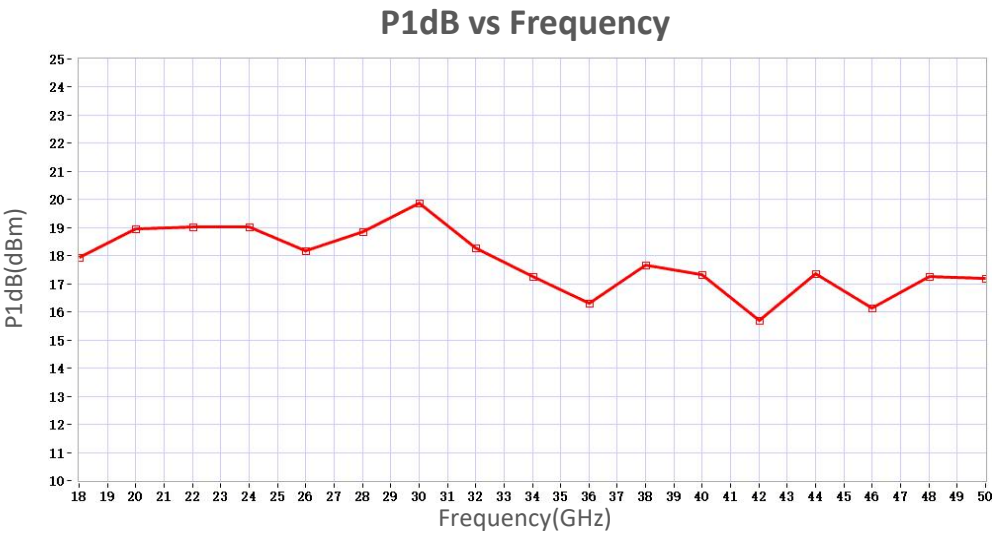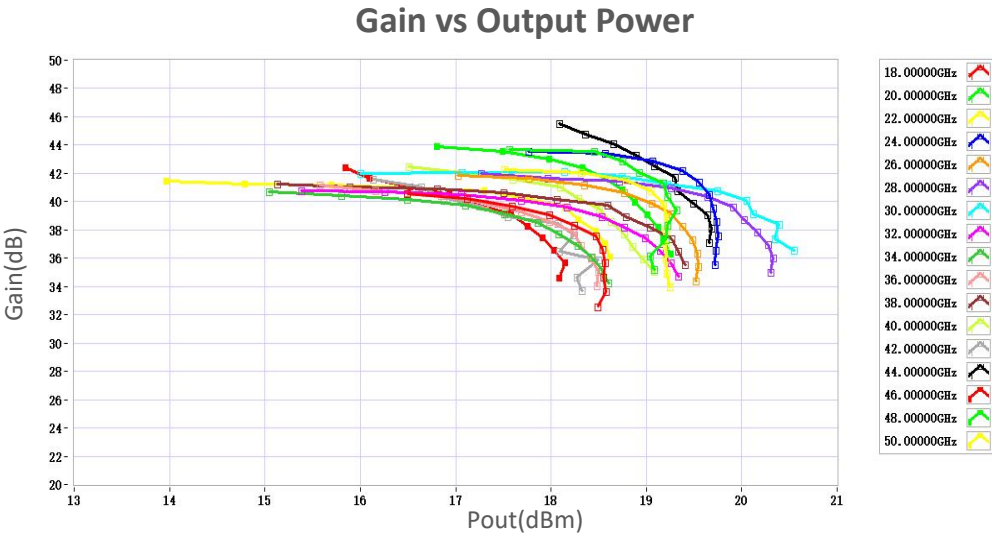

典型曲线 Typical Performance Data:

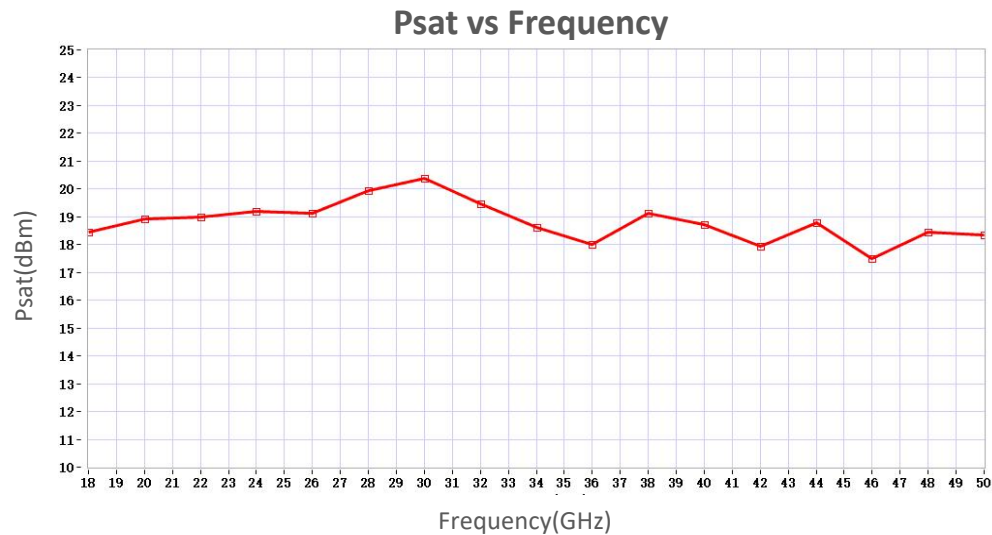

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.