

TURLF-DC12GK

TURLF-DC12GK is a coaxial lowpass filter with a passband frequency from DC to 12 GHz . The nominal insertion loss of the filter is 1.2 dB and the typical rejection is 40 dB.

Features:

- Passband Frequency Range DC to 12 GHz
- Low Insertion Loss

Applications:

- Instrumentations
- Test Labs
- Sub-assemblies


电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency range	DC	12		GHz
通带插损 Passband Insertion Loss			1.2	dB
带外抑制 Rejection	20@16.2GHz,40@19.4GHz			dB
耐受功率 Power Handling			1	W
回波损耗 Return Loss		18		dB
阻抗 Impedance	50			Ohms


环境和机械特性 Envriionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temerature	-55 To +125	℃
存储温度 Storage Temerature	-65 to +150	℃
接口 Connectors	2.92mm	


外形图 Outline Drawing: Unit:mm

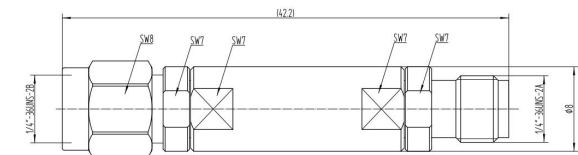

TURLF-DC12GK

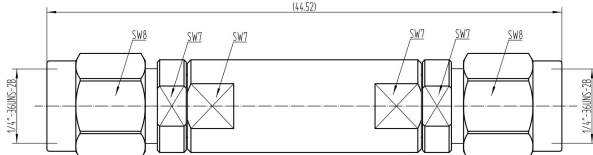

TURLF-DC-12G-MM

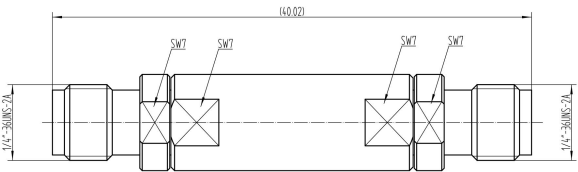

TURLF-DC-12G-FF



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TURLF-DC12GK	Coaxial Lowpass Filter,Passband frequency range:DC-12GHz,Passband Insertion Loss:1.2dB, 2.92mm Male/2.92mm Female Coaxial Fixed Termination	Rev.1.1
TURLF-DC-12G-MM	Coaxial Lowpass Filter,Passband frequency range:DC-12GHz,Passband Insertion Loss:1.2dB, 2.92mm Male Coaxial Fixed Termination	Rev.1.1
TURLF-DC-12G-FF	Coaxial Lowpass Filter,Passband frequency range:DC-12GHz,Passband Insertion Loss:1.2dB, 2.92mm Female Coaxial Fixed Termination	Rev.1.1

典型曲线 Typical Performance Data:

