

TURLF-DC13GK

TURLF-DC13GK is a coaxial lowpass filter with a passband frequency from DC to 13 GHz . The nominal insertion loss of the filter is 1.4 dB and the typical rejection is 40 dB.

Features:

- Passband Frequency Range DC to 13 GHz
- Low Insertion Loss

Applications:

- Instrumentations
- Test Labs
- Sub-assemblies




电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency range	DC	13		GHz
通带插损 Passband Insertion Loss			1.4	dB
带外抑制 Rejection	20@17.5GHz,40@20.7GHz			dB
耐受功率 Power Handling			1	W
回波损耗 Return Loss		20		dB
阻抗 Impedance	50			Ohms

环境和机械特性 Envrrionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temerature	-55 To +125	℃
存储温度 Storage Temerature	-65 to +150	℃
接口 Connectors	2.92mm	

外形图 Outline Drawing: Unit:mm

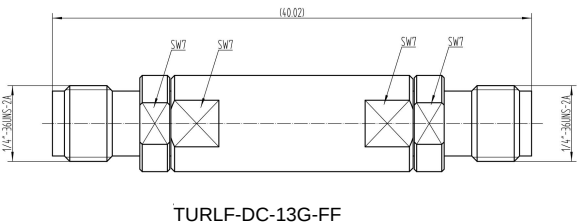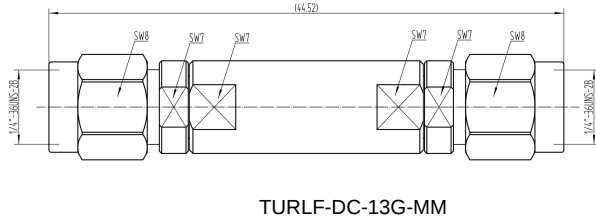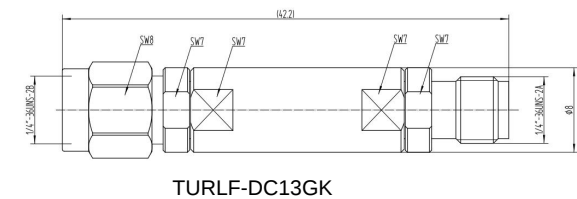



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TURLF-DC13GK	Coaxial Lowpass Filter,Passband frequency range:DC-13GHz,Passband Insertion Loss:1.4dB, 2.92mm Male/2.92mm Female Coaxial Fixed Termination	Rev.1.1
TURLF-DC-13G-MM	Coaxial Lowpass Filter,Passband frequency range:DC-13GHz,Passband Insertion Loss:1.4dB, 2.92mm Male Coaxial Fixed Termination	Rev.1.1
TURLF-DC-13G-FF	Coaxial Lowpass Filter,Passband frequency range:DC-13GHz,Passband Insertion Loss:1.4dB, 2.92mm Female Coaxial Fixed Termination	Rev.1.1