

Low Noise Amplifier

4-8GHz/1dB NF/22dB Gain/-2dBm P1dB

TLLA4G8G-22-10

TURLA4G8G-2210 is a low noise amplifier with a typical small signal gain of 22 dB and a nominal noise figure of 1 dB across the frequency range of 4 to 8 GHz. The DC power requirement for the amplifier is +2 V DC/10 mA. The input and output port configuration offers coax adapter structure with SMA female.

Features:

- Frequency range: 4-8GHz
- Gain: 22dB Typ
- Noise Figure: 1dB Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Communication systems

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	4		8	GHz
小信号增益 Small Signal Gain		22		dB
增益平坦度 Gain Flatness		±1		dB
噪声系数 Noise Figure		1		dB
线性输出功率 Output P1dB		-2		dBm
输入驻波 Input VSWR		2.5		:1
输出驻波 Output VSWR		2		:1
直流电压 DC Voltage		+2		V DC
直流电流 DC Supply Current		10		mA
阻抗 Impedance	50			Ohms


机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	
直流偏置 DC Bias	Solder Pin	

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+7 V
输入功率 RF Input Power	+20 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形图 Outline Drawing: Unit:mm

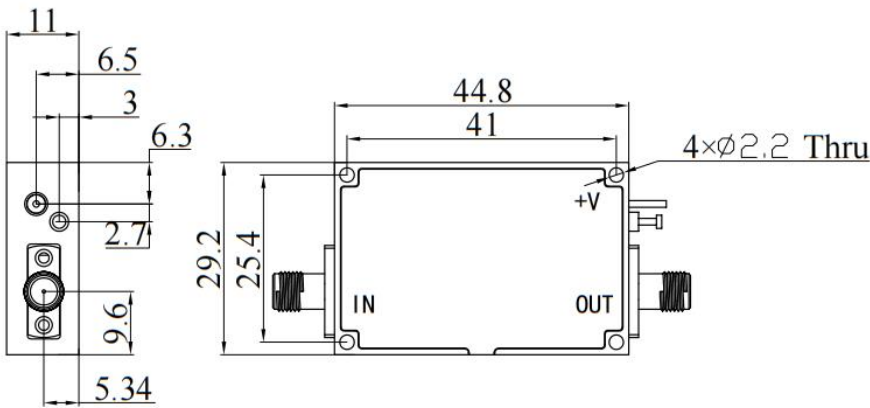

***Heat Sink Required During Operation



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-45		+85	℃
存储温度 Non-operating Temperature	-55		+125	℃
相对湿度 Relative humidity		95		%
海拔 Altitude		10,000		feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			



订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TURLA4G8G-2210	Low Noise Amplifier, 4-8GHz, Noise Figure:1dB, Gain:22dB,P1dB: -2dBm,+2V DC,Without Heatsink	Rev.1.1
TURLA4G8G-2210 HS	Low Noise Amplifier, 4-8GHz, Noise Figure:1dB, Gain:22dB,P1dB: -2dBm,+2V DC,With Heatsink	Rev.1.1