

Low Noise Amplifier

4-8GHz/0.9dB NF/45dB Gain/16dBm P1dB

TLLA4G8G-45-07

TURLA4G8G-4507 is a low noise amplifier with a typical small signal gain of 45 dB and a nominal noise figure of 0.9 dB across the frequency range of 4 to 8 GHz. The DC power requirement for the amplifier is +12 V DC/70 mA. The input and output port configuration offers coax adapter structure with SMA female.

Features:

- Frequency range: 4-8GHz
- Gain: 45dB Typ
- Noise Figure: 0.9dB Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Communication systems

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	4		8	GHz
小信号增益 Small Signal Gain	43	45		dB
增益平坦度 Gain Flatness		±1	±1.5	dB
噪声系数 Noise Figure		0.9	1.2	dB
线性输出功率 Output P1dB	14	16		dBm
输入驻波 Input VSWR		2	2.5	:1
输出驻波 Output VSWR		2	2.5	:1
直流电压 DC Voltage	+8	+12	+15	V DC
直流电流 DC Supply Current		70		mA
阻抗 Impedance		50		Ohms

机械特性 Mechanical Specifications:


参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	
直流偏置 DC Bias	Solder Pin	

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+15 V
输入功率 RF Input Power	+12 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形图 Outline Drawing:

Unit:mm

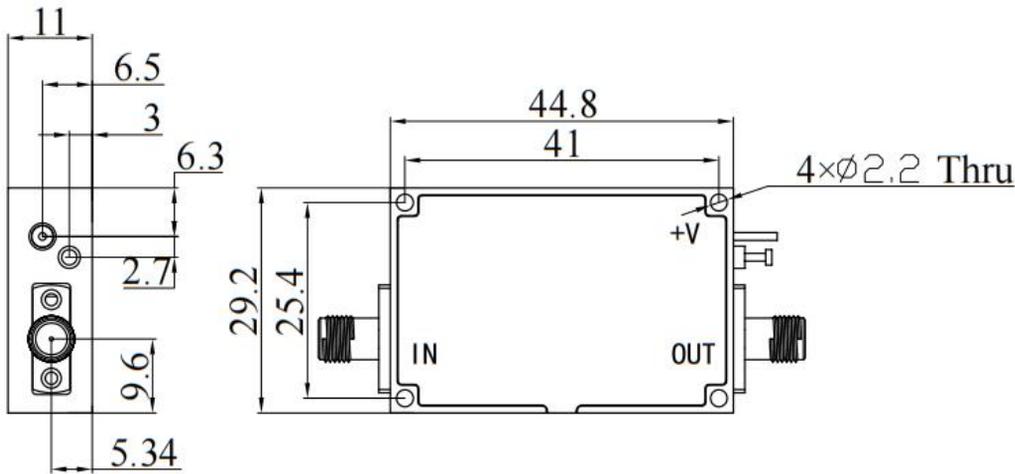

*****Heat Sink Required During Operation**



温度环境 Environmental Conditions:


参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-45		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude		10,000		feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			

订货信息 Ordering Information:


标准型号 Base Number	描述 Description	版本号 Revision
TURLA4G8G-4507	Low Noise Amplifier, 4-8GHz, Noise Figure:0.9dB, Gain:45 dB,P1dB:16dBm,+12V DC,Without Heatsink	Rev.1.1
TURLA4G8G-4507 HS	Low Noise Amplifier, 4-8GHz, Noise Figure:0.9dB, Gain:45 dB,P1dB:16dBm,+12V DC,With Heatsink	Rev.1.1

典型曲线 Typical Performance Data:

Gain&VSWR vs Frequency

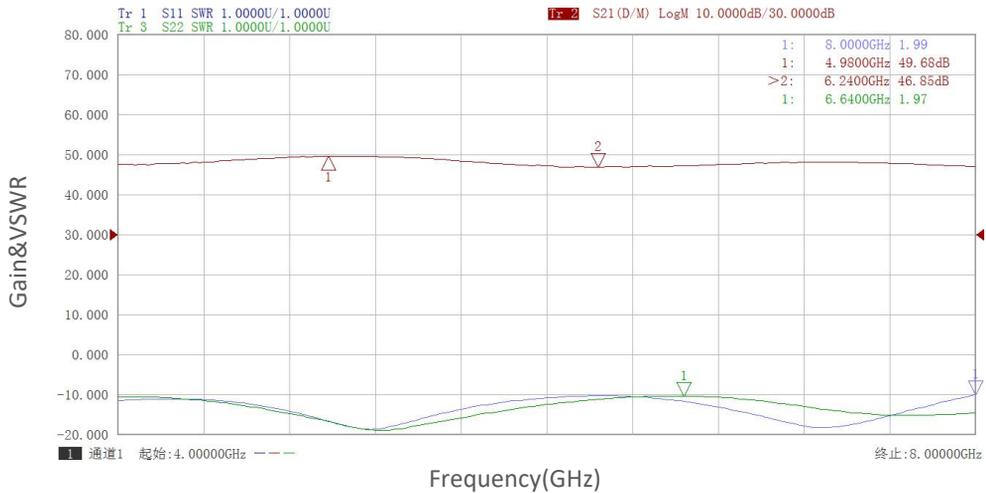


Noise Figure vs Frequency

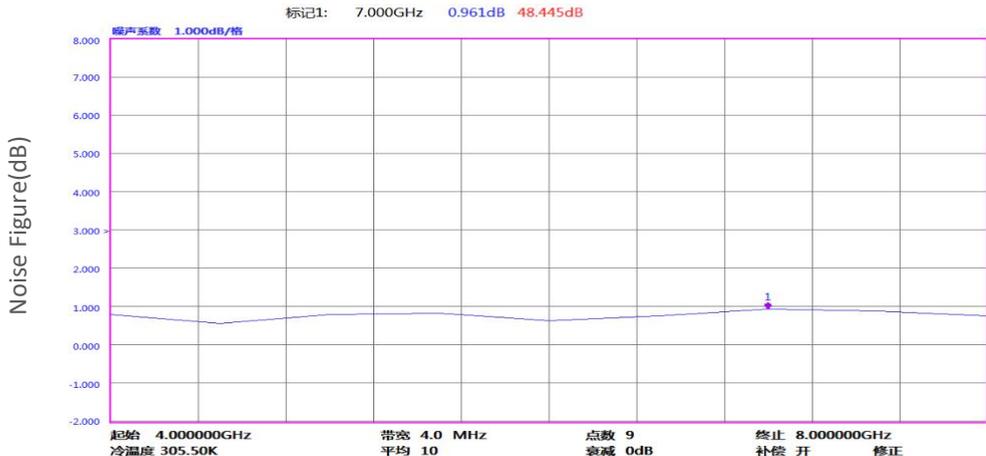


典型曲线 Typical Performance Data:

Gain vs Output Power

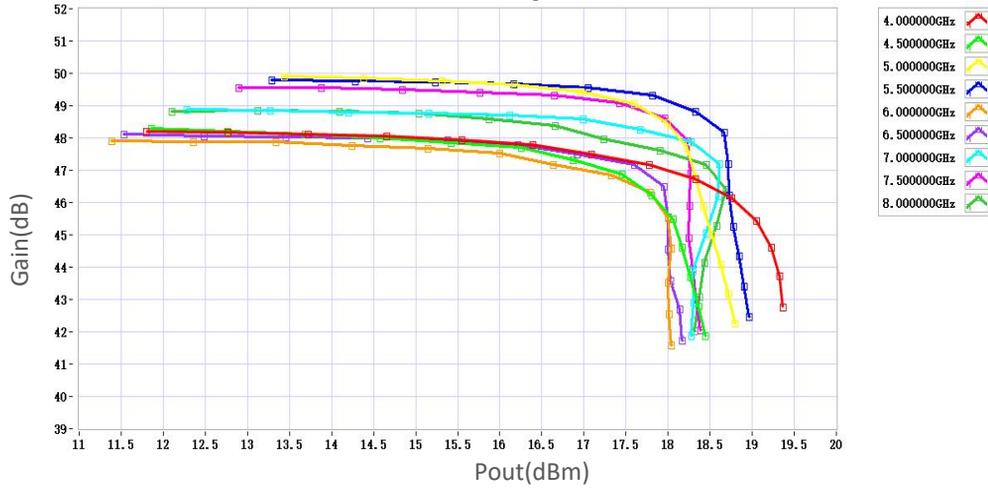

P1dB vs Frequency

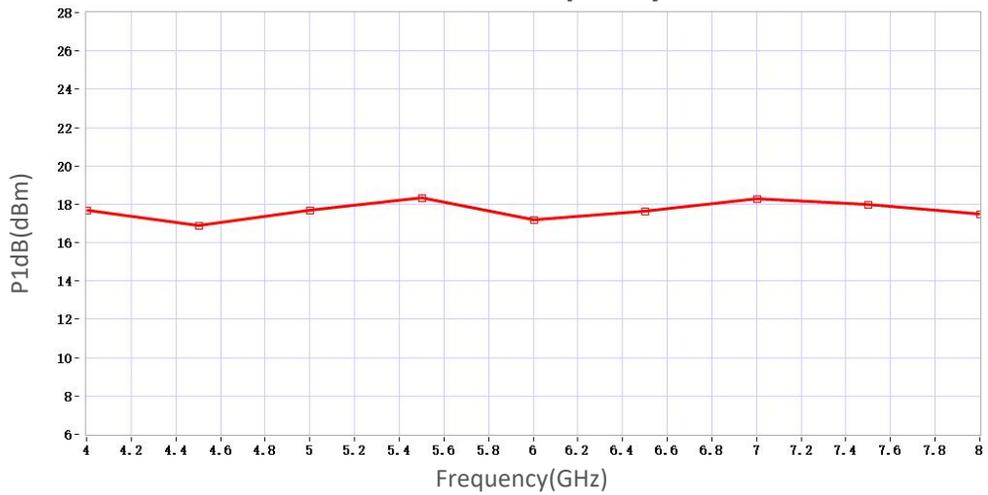

P3dB vs Frequency

