



Low Noise Amplifier

8-12GHz/1.5dB NF/32dB Gain/15dBm P1dB

TLLA8G12G-32-15

TURLA8G12G-3215 is a low noise amplifier with a minimum small signal gain of 32 dB and a maximum noise figure of 1.5 dB across the frequency range of 8 to 12 GHz. The DC power requirement for the amplifier is +12 V DC/100 mA. The input and output port configuration offers coax adapter structure with SMA female.

- Features:
- Frequency range: 8-12GHz
 - Gain: 32dB Min
 - Noise Figure: 1.5dB Max
 - Good Power and Gain Flatness
 - 50 Ohm Matched Input / Output

- Applications:
- Communication systems

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	8		12	GHz
小信号增益 Small Signal Gain	32			dB
增益平坦度 Gain Flatness			±1.5	dB
噪声系数 Noise Figure			1.5	dB
线性输出功率 Output P1dB	15			dBm
输入驻波 Input VSWR			2	:1
输出驻波 Output VSWR			2	:1
直流电压 DC Voltage		+12	+15	V DC
直流电流 DC Supply Current		100		mA
阻抗 Impedance	50			Ohms

机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	
直流偏置 DC Bias	Solder Pin	

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+15 V
输入功率 RF Input Power	+15 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V



 ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-45		+85	℃
存储温度 Non-operating Temperature	-55		+125	℃
相对湿度 Relative humidity		95		%
海拔 Altitude		50,000		feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TURLA8G12G-3215	Low Noise Amplifier, 8-12GHz, Noise Figure:1.5dB, Gain:32dB,P1dB:15dBm,+12V DC,Without Heatsink	Rev.1.1
TURLA8G12G-3215 HS	Low Noise Amplifier, 8-12GHz, Noise Figure:1.5dB, Gain:32dB,P1dB:15dBm,+12V DC,With Heatsink	Rev.1.1

典型曲线 Typical Performance Data:

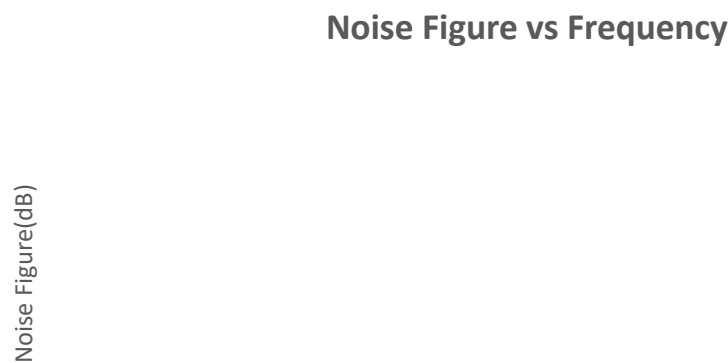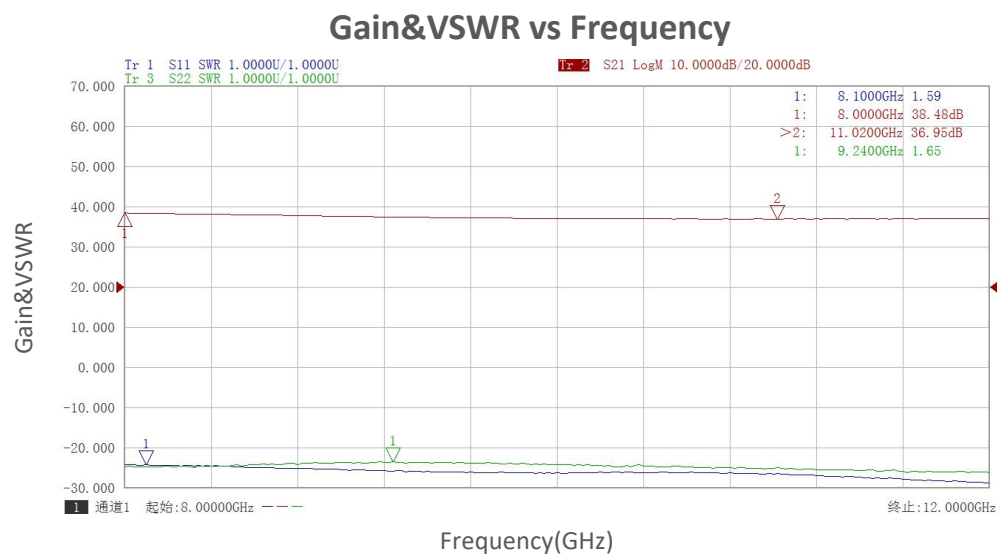

典型曲线 Typical Performance Data:

