



Power Amplifier

0.01-20GHz /46dB Gain/30.5dBm Psat

TLPA0.01G20G-46-30.5

TURPA0.01G20G-4630.5 is a power amplifier with a typical gain of 46 dB and a nominal Psat of 30.5 dBm across the frequency range of 0.01 to 20 GHz. The DC power requirement for the amplifier is +24 VDC/600 mA. The input and output port configuration offers coax adapter structure with SMA female.

Features:

- Ultra Wide Band: 0.01-20GHz
- Gain: 46dB Typ
- Output Power Psat: 30.5dBm Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	0.01-20			GHz
增益 Gain	45	46		dB
增益平坦度 Gain Flatness		±3		dB
线性输出功率 Output P1dB		29.5		dBm
饱和输出功率 Output Psat		30.5		dBm
输入驻波 Input VSWR		1.8		:1
输出驻波 Output VSWR		1.8		:1
直流电压 DC Voltage		24		V DC
直流电流 DC Supply Current		600		mA
阻抗 Impedance	50			Ohms



机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	50*65*14(With heatsink) 100*50*64(Without heatsink)	mm
重量 Weight	/	g


绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	TBD
输入功率 RF Input Power	+5 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形图 Outline Drawing: Unit:mm

外形图 Outline Drawing:

Unit:mm

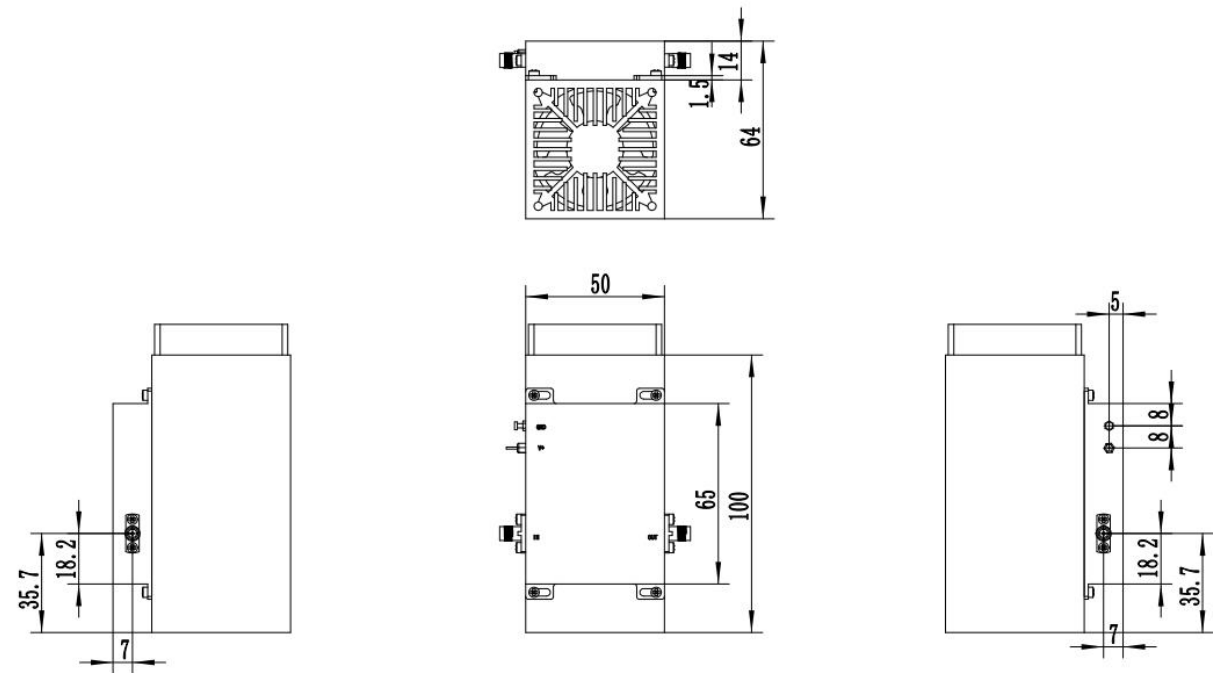

温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature*	-40		+60	℃
存储温度 Non-operating Temperature*	-50		+70	℃
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

*Note: For a wider temperature range, please consult the manufacturer.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TURPA0.01G20G-4630.5	Power amplifier 0.01-20GHz,Gain:46dB,Psat:30.5dBm, +24V DC,Without Heatsink	Rev.1.1