

Power Amplifier

0.5-6GHz/45dB Gain/46dBm Psat

TLPA0.5G6G-45-46

TURPA0.5G6G-4546 is a power amplifier with a typical power gain of 47 dB and a nominal Psat of 46 dBm across the frequency range of 0.5 to 6 GHz. The DC power requirement for the amplifier is +28 VDC/6A. The input and output ports configuration offers coax adapter structure with SMA female .

Features:

- Frequency range: 0.5-6 GHz
- Gain: 45dB Min
- Output Power Psat: 46dBm Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	0.5-6			GHz
功率增益 Power Gain	45	47		dB
增益平坦度 Gain Flatness		±4	±5	dB
线性输出功率 Output P1dB	43	44		dBm
饱和输出功率 Output Psat	45	46		dBm
谐波抑制 Harmonic		-15	-8	dBc
输入驻波 Input VSWR		1.5	2	:1
直流电压 DC Voltage		28	30	V DC
静态电流 Static Current		1		A
饱和电流 Saturation current		6	8	A
阻抗 Impedance	50			Ohms


机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	200*120*25(Without heatsink) 262.2*140*62(With heatsink)	mm
重量 Weight	1.2	Kg


绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+30 V
输入功率 RF Input Power	+5 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形图 Outline Drawing: Unit:mm

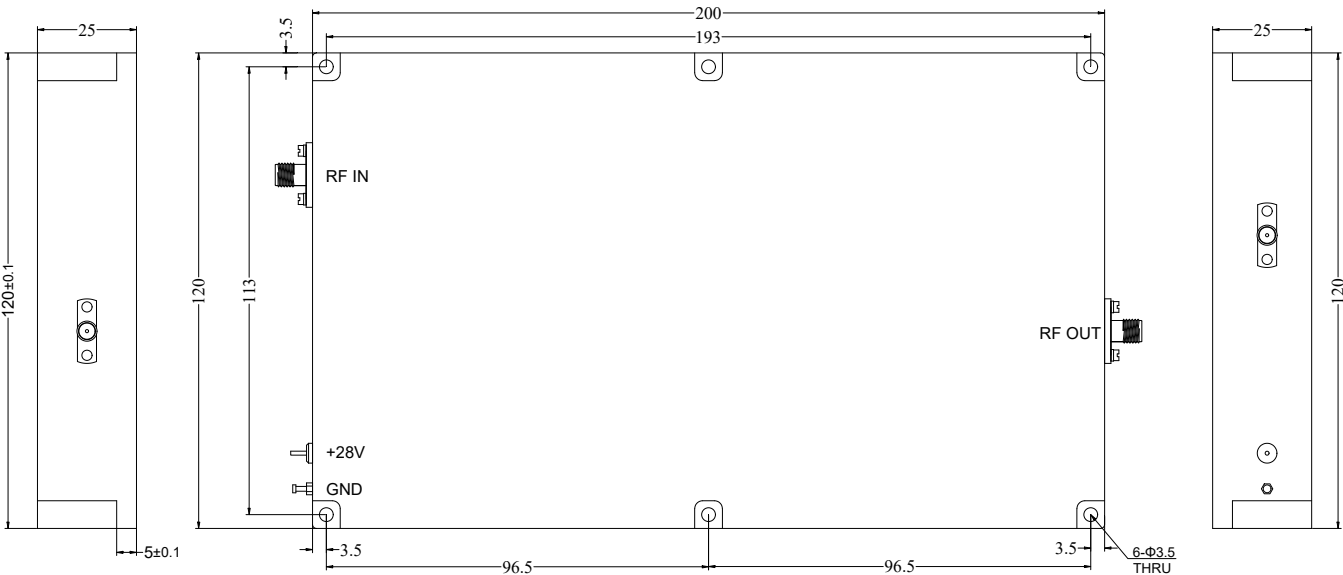

外形图 Outline Drawing: Unit:mm

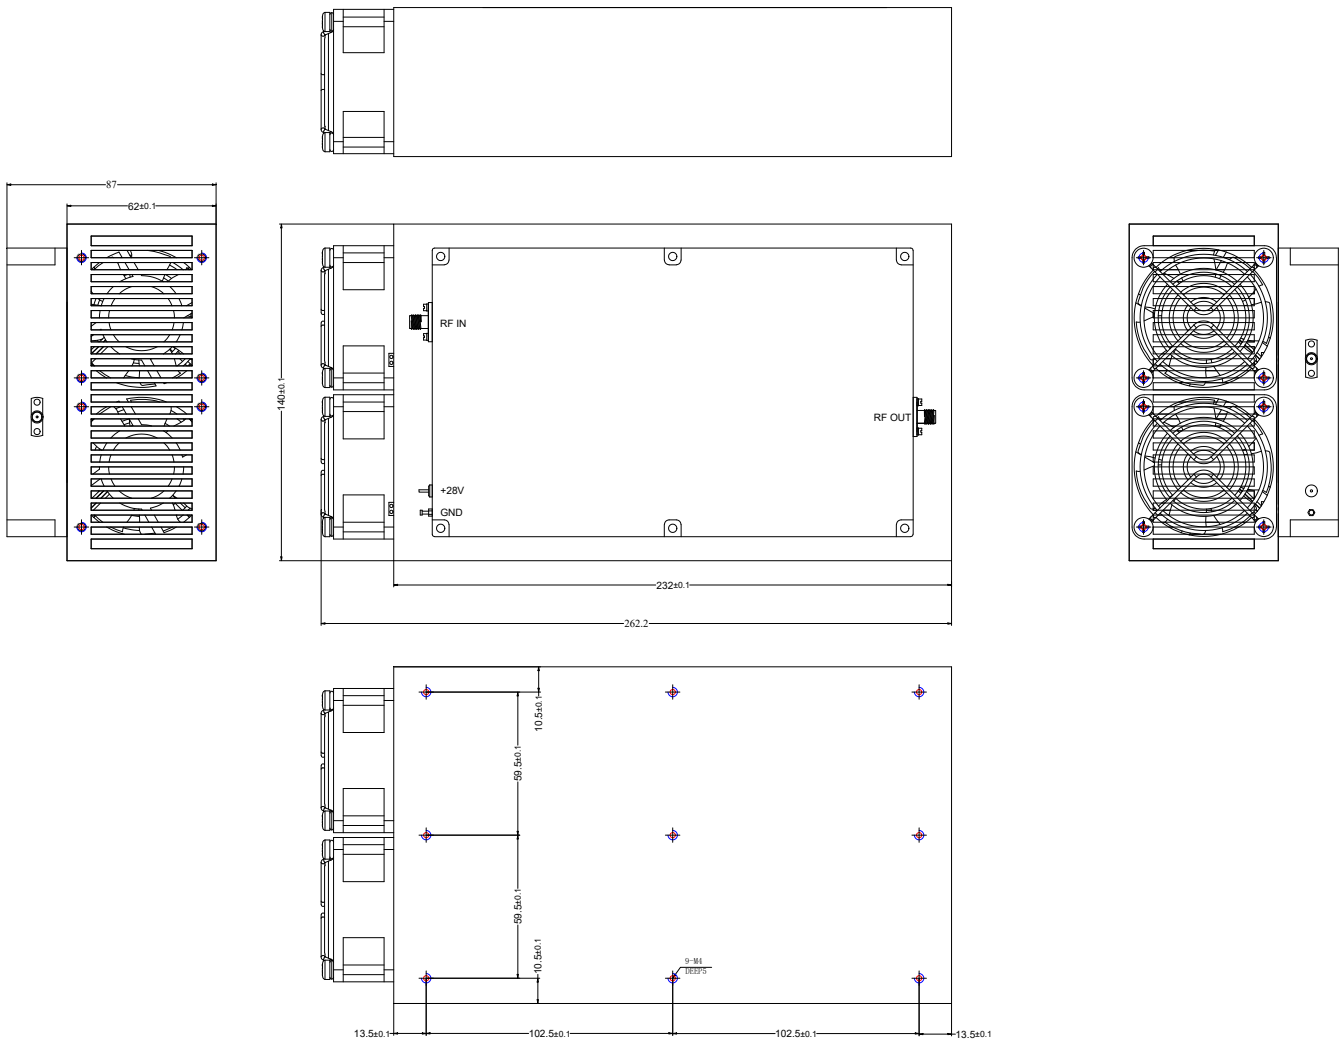

风扇供电 Fan power supply

Red line	Power supply positive,+24.0-28.0VDC DC current: 0.3A
Black line	Ground

使用说明 Instruction Manual:

Power on		Power off	
1	Connect ground and RF input connector	1	Turn off RF signal
2	Connect the RF output port to the load (The VSWR of the load should be less than 3:1)	2	Disconnect the 28V power supply to the amplifier
3	Connect the 24V power supply to the fan	3	Disconnect the 24V power supply to the fan
4	Connect the 28V power supply to the amplifier	4	Disconnect the RF connectors
5	Turn on the RF signal and ensure that the input signal does not exceed 5dBm		

温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature*	-40		+50	℃
存储温度 Non-operating Temperature*	-50		+60	℃
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

*Note: For a wider temperature range, please consult the manufacturer.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TURPA0.5G6G-4546	Power amplifier 0.5-6GHz, Gain:45dB,Psat:46dBm,+28V DC,Without Heatsink	Rev.1.1
TURPA0.5G6G-4546 HS	Power amplifier 0.5-6GHz, Gain:45dB,Psat:46dBm,+28V DC,With Heatsink	Rev.1.1