

Power Amplifier

10MHz-10GHz/32dB Gain/31dBm Psat

TLPA10M10G-30-30

TURPA10M10G-3030 is a power amplifier with a typical small signal gain of 32 dB and a nominal Psat of 31 dBm across the frequency range of 10MHz to 10GHz. The DC power requirement for the amplifier is +15 VDC/0.8 A. The input and output port configuration offers coax adapter structure with SMA female.

Features:

- Frequency range: 10MHz-10GHz
- Gain: 32dB Typ
- Output Power Psat: 31dBm Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	10MHz-10GHz			
小信号增益 Small Signal Gain	30	32		dB
增益平坦度 Gain Flatness@1.1-10GHz*		±1	±2	dB
饱和输出功率 Output Psat	30	31		dBm
谐波抑制 Harmonic		-15		dBc
输入驻波 Input VSWR		1.5	2.0	:1
直流电压 DC Voltage		15	16	V DC
直流电流 DC Supply Current		0.8		A
阻抗 Impedance	50			Ohms

*Note: The gain flatness becomes worse at frequencies below 1.1GHz.


机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	120*70*15	mm
重量 Weight	150	g

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+16 V
输入功率 RF Input Power	+5 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形图 Outline Drawing: Unit:mm

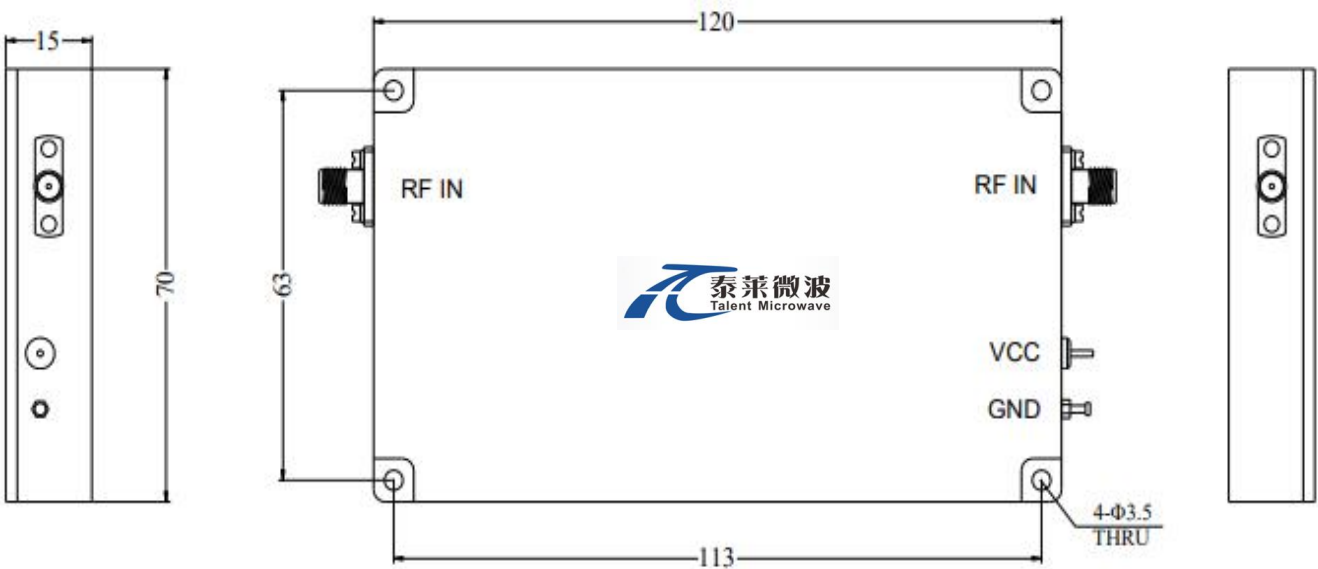

***Heat Sink Required During Operation



温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature*	-40		+60	℃
存储温度 Non-operating Temperature*	-50		+70	℃
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

*Note: For a wider temperature range, please consult the manufacturer.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TURPA10M10G-3030	Power amplifier 10MHz-10GHz, Gain:30dB,Psat:30dBm,+15V DC,Without Heatsink	Rev.1.1
TURPA10M10G-3030 HS	Power amplifier 10MHz-10GHz, Gain:30dB,Psat:30dBm,+15V DC,With Heatsink	Rev.1.1


典型曲线 Typical Performance Data:

VSWR&Gain vs Frequency


VSWR&Gain

典型曲线 Typical Performance Data:

Gain vs Output Power

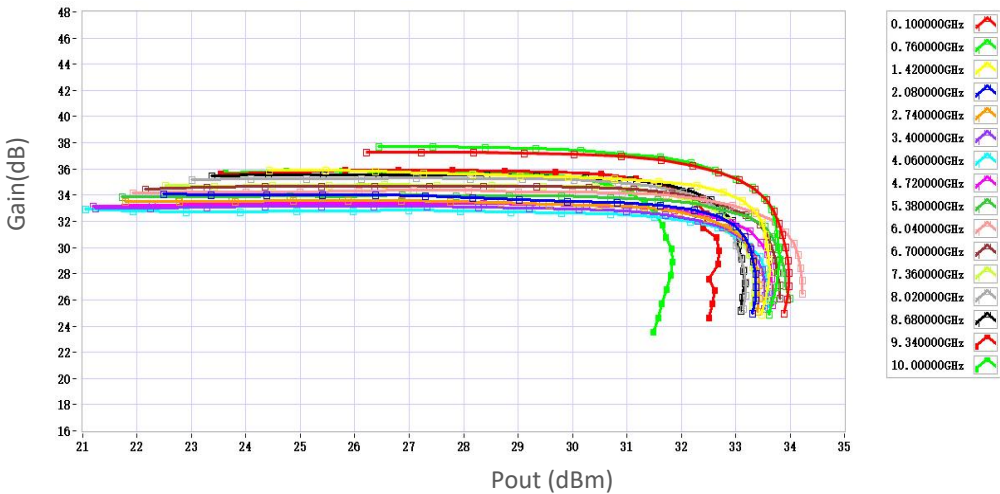


P1dB vs Frequency

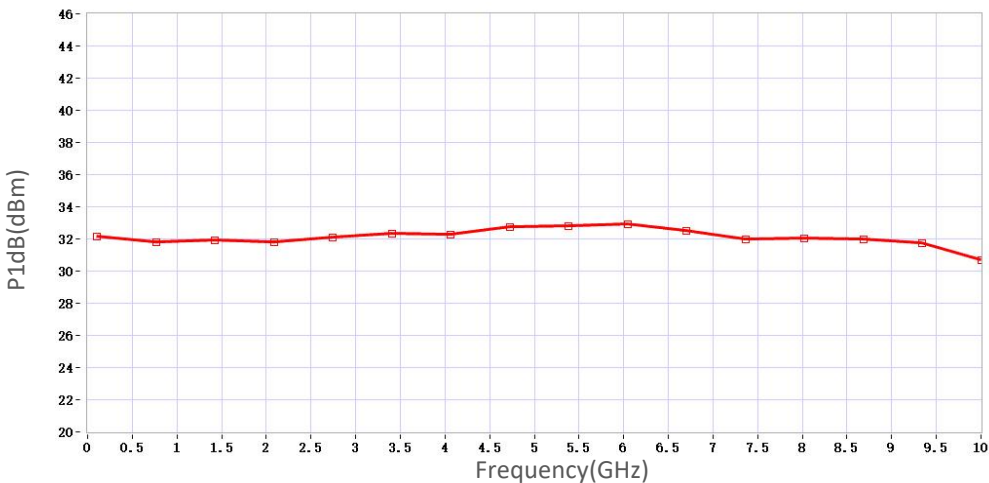

P3dB vs Frequency

P3dB(dBm)

典型曲线 Typical Performance Data:

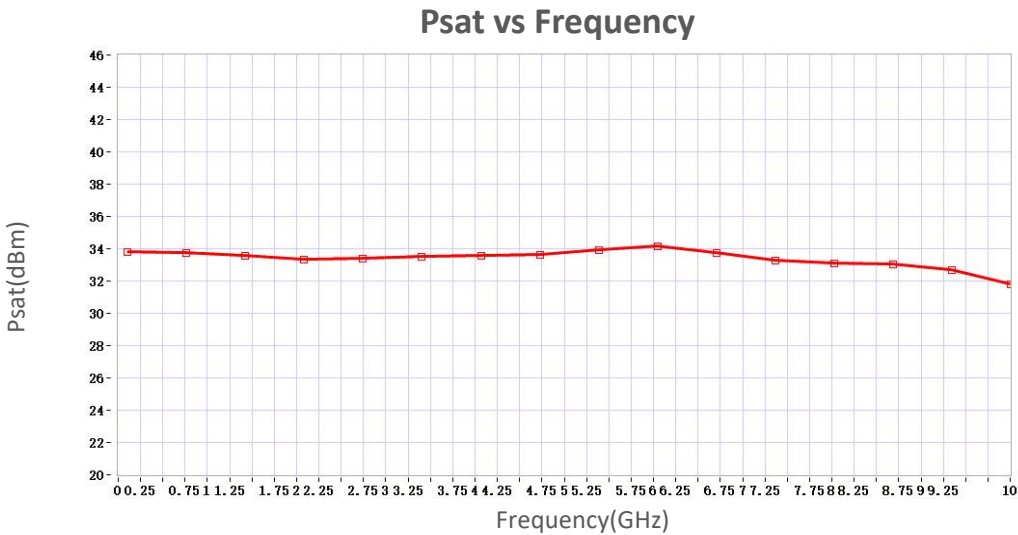

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.