

TURPA10M300M-3333

10MHz-300MHz, Gain:33dB, Psat:33dBm

Feature:

- Wide Band: 10MHz-300MHz
- Gain: 33dB Min
- Psat Output Power: 33 dBm Min
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

电气特性 Electrical Specifications:

参数Parameter	Min	Typ	Max	单位Units
频率范围 Frequency range	10-300			MHz
增益 Gain	33	35		dB
增益平坦度 Gain Flatness		±1	±2	dB
饱和输出功率 Output Psat	33	34		dBm
谐波抑制 Harmonics @Pout=33dBm		-15		dBc
输入驻波 Input VSWR		1.5	2.0	:1
直流电压 DC Voltage		15	16	V DC
直流电流 DC Supply Current		0.2	1.0	A
阻抗 Impedance	50			Ohms

机械特性 Mechanical Specifications:


参数Parameter	指标 Value	单位Units
输入输出接口 Input /Output Connector	SMA Female	
直流偏置 Bias	Solder Pin	
尺寸 Size	76*48*15	mm
重量 Weight	150	g

绝对最大值 Absolute Maximum Ratings:

参数Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	16V
输入功率 RF INPUT POWER	5dBm



Unit: mm

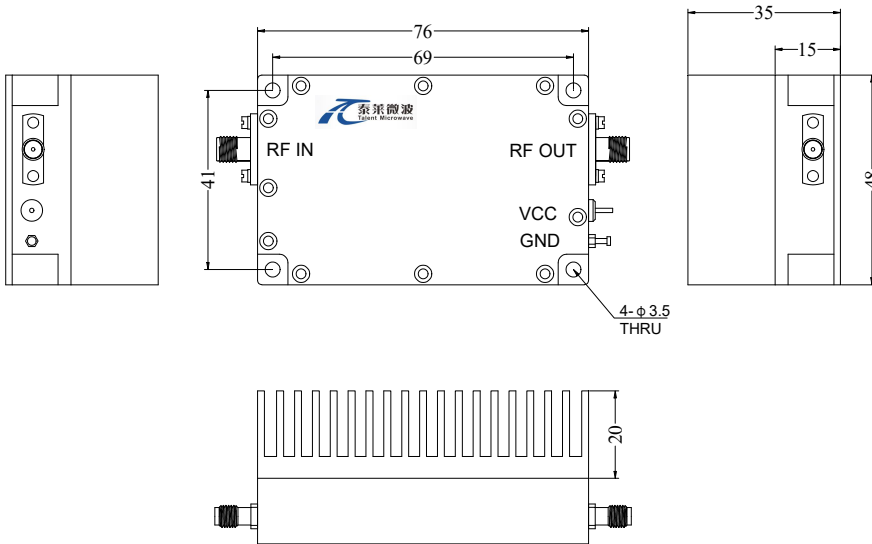

温度环境 Environmental Conditions:

参数Parameter	Min	Typ	Max	单位Units
操作温度 Operating Temperature	-45		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	30,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Part Number	描述 Description	版本号Revision
------------------	----------------	-------------