

Power Amplifier

GHz /47dB Gain/47 dBm Psat

TLPA18G26.5G-47-47

TURPA18G26.5G-4747 is a power amplifier with a typical power gain of 47 dB and a Psat of 47 dBm across the frequency range of 18 to 26.5 GHz. The DC power requirement for the amplifier is +24 VDC/25 A. The input port configuration offers coax adapter structure with 2.92 mm Female and output port configuration offers coax adapter structure with WR42.

Features:

- Ultra Wide Band: 18-26.5GHz
- Gain: 47dB Min
- Output Power Psat: 47dBm Min
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	18-26.5			GHz
增益 Gain	47	50		dB
增益平坦度 Gain Flatness		±3.5		dB
饱和输出功率 Output Psat	47			dBm
杂散 Spurious			-50	dBc
二次谐波 2nd Harmonic			-15	dBc
输入驻波 Input VSWR			2	:1
直流电压 DC Voltage		24		V DC
直流电流 DC Current			25	A
阻抗 Impedance	50			Ohms


机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	2.92 Female/WR42	
DC加电接口 DC Power Interface	SUB-7W2	
尺寸 Size	300*264*85	mm
重量 Weight	10	Kg

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	TBD
输入功率 RF Input Power	5 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形图 Outline Drawing: Unit:mm

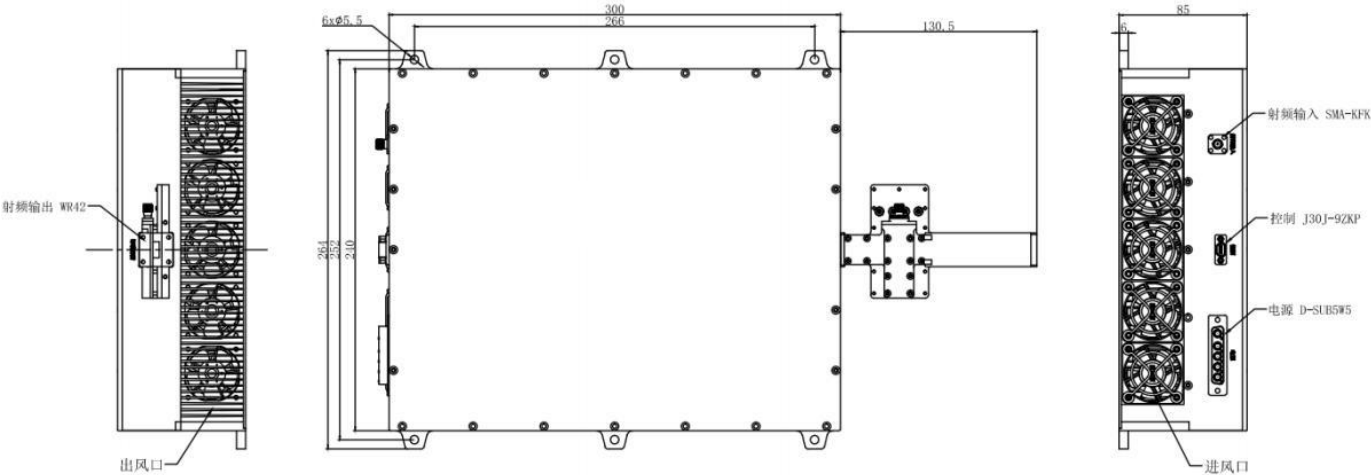

SUB-7W5 Define	
引脚 Pin	功能 Function
A1-A2	+24V
A3-A5	GND



温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature*	-20		+40	°C
存储温度 Non-operating Temperature*	-45		+65	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			


*Note: For a wider temperature range, please consult the manufacturer.

订货信息 Ordering Information:


标准型号 Base Number	描述 Description	版本号 Revision
TURPA18G26.5G-4747	Power amplifier 18-26.5GHz,Gain:47dB,Psat:47dBm,+24V DC,Without Heatsink.	Rev.1.1

典型曲线 Typical Performance Data:

Input VSWR vs Frequency

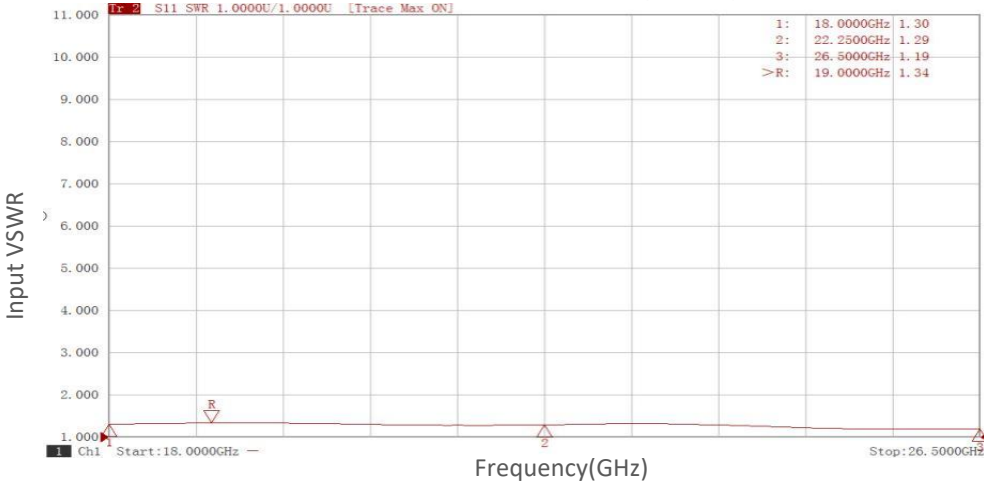



Gain vs Frequency

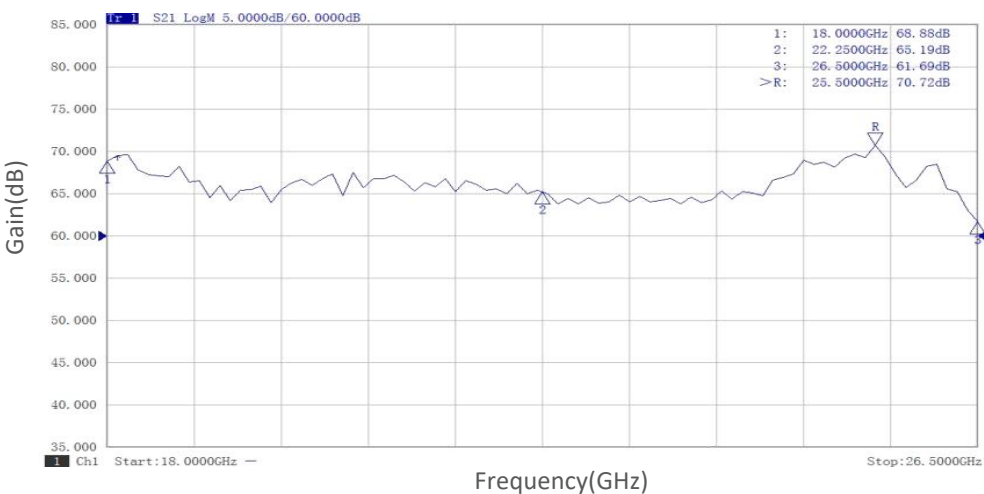

P1dB vs Frequency

P1dB(dBm)


典型曲线 Typical Performance Data:

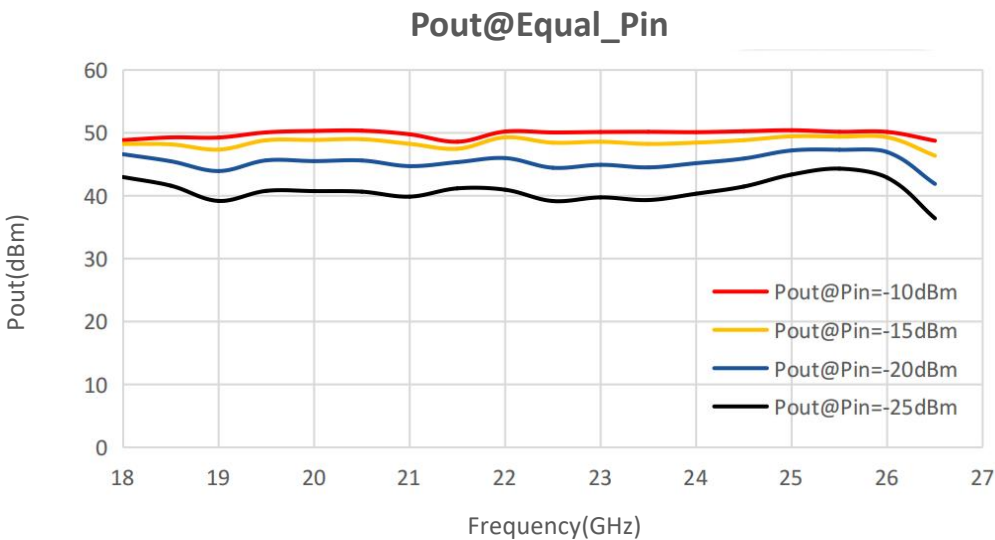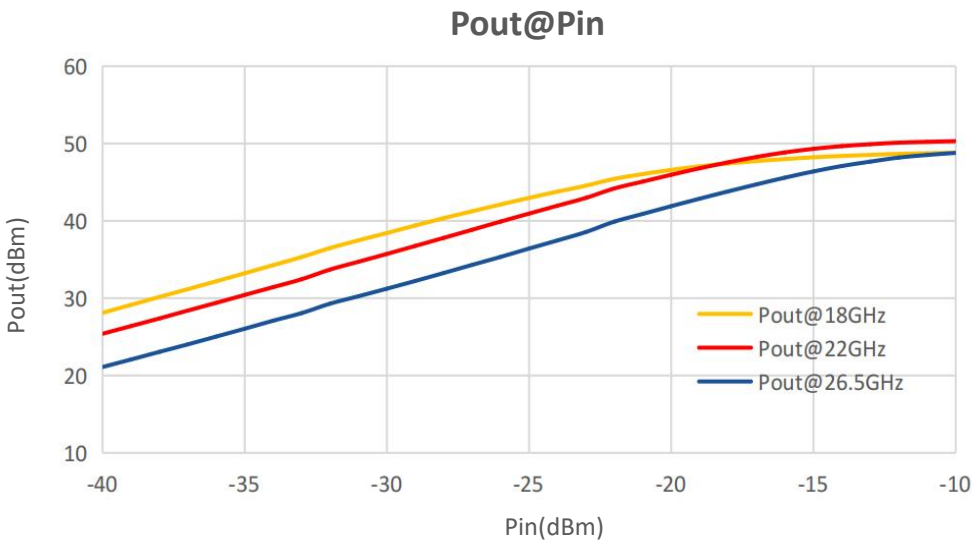

Spurious vs Frequency

Spurious(dBc)

典型曲线 Typical Performance Data:

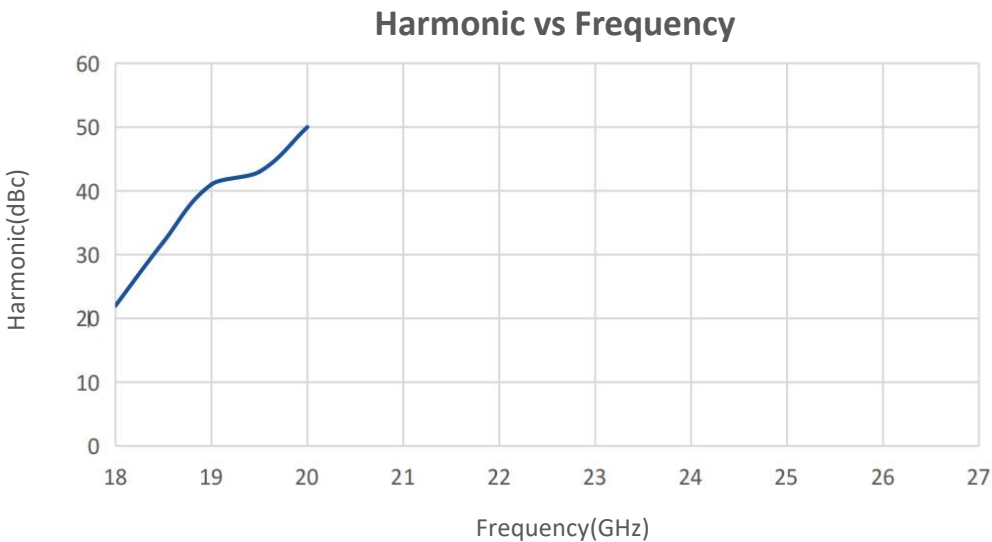

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.