

Power Amplifier

2-18GHz /50 dB Gain/50 dBm Psat

TLPA2G18G-50-50-HS

TURPA2G18G-5050HS is a power amplifier with a typical small signal gain of 50 dB and a nominal Psat of 50 dBm across the frequency range of 2 to 18 GHz. The DC power requirement for the amplifier is +28 VDC/1800 W. The input and output port configuration offers coax adapter structure with SMA female/N Female.

Features:

- Ultra Wide Band: 2-18GHz
- Gain: 50dB Min
- Output Power Psat: 50dBm Min
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	2-18			GHz
小信号增益 Small Signal Gain	50			dB
增益平坦度 Gain Flatness		±4.5	±5	dB
饱和输出功率 Output Psat	50			dBm
杂散 Spurious@Pout=51dBm			-60	dBc
谐波 Harmonics@Pout=51dBm			-10	dBc
输入驻波 Input VSWR			2.0	:1
直流电压 DC Voltage	+28			V DC
功耗 Power Consumption	1800@Max			W
阻抗 Impedance	50			Ohms

机械特性 Mechanical Specifications:


参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/N Female	
直流偏置 DC Bias	SUB-5W5	
尺寸 Size	340*330*98.5	mm
重量 Weight	25	Kg

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+28 V
输入功率 RF Input Power	10 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形图 Outline Drawing:

Unit:mm

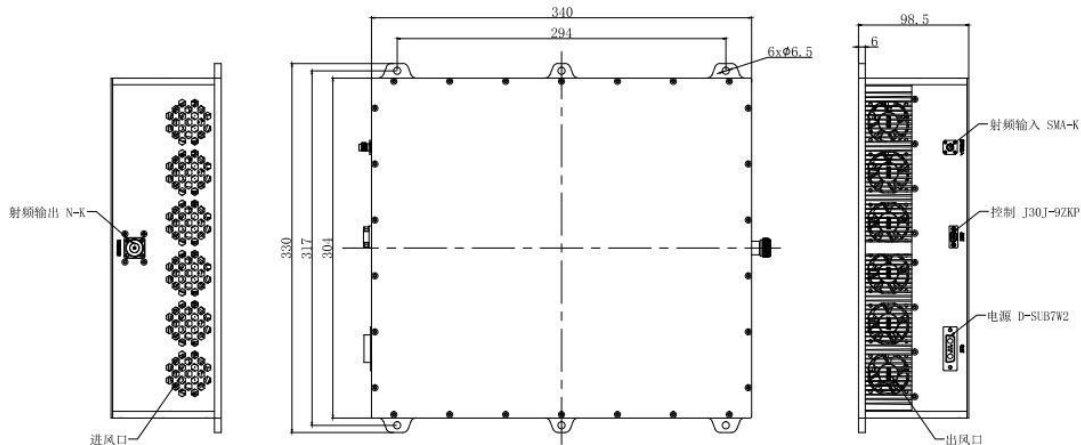

SUB-5W5 Define	
引脚 Pin	功能 Function
A1-A2	+28V
A3-A5	GND

温度环境 Environmental Conditions:



参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature*	-20		+40	°C
存储温度 Non-operating Temperature*	-40		+55	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10000			feet
震动 Shock / Vibration(MIL-STD-810F)	20g,11ms,saw-tooth			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

*Note: For a wider temperature range, please consult the manufacturer.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TURPA2G18G-5050HS	Power amplifier 2-18GHz,Gain:50dB,Psat:47dBm, +28V DC,Built in Fan Cooling	Rev.1.1


典型曲线 Typical Performance Data:

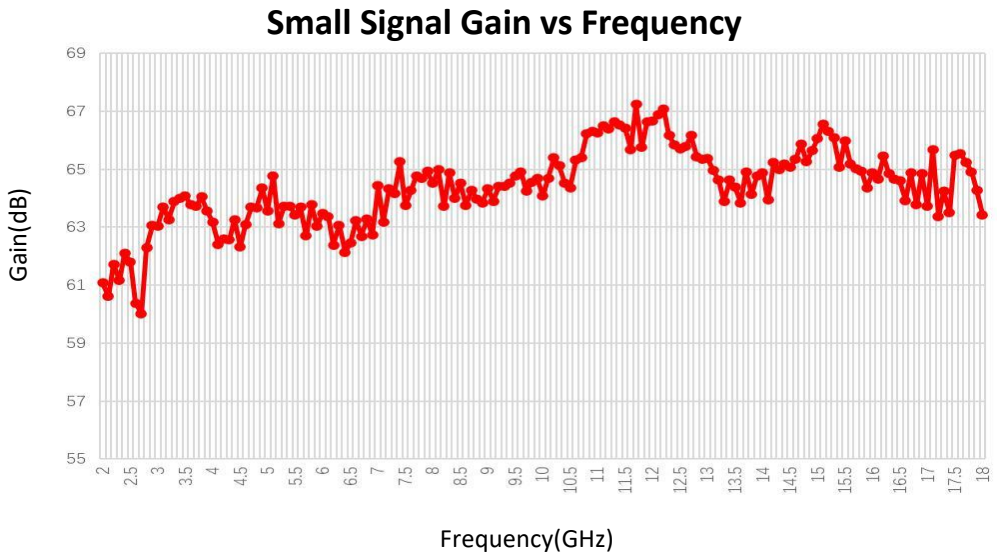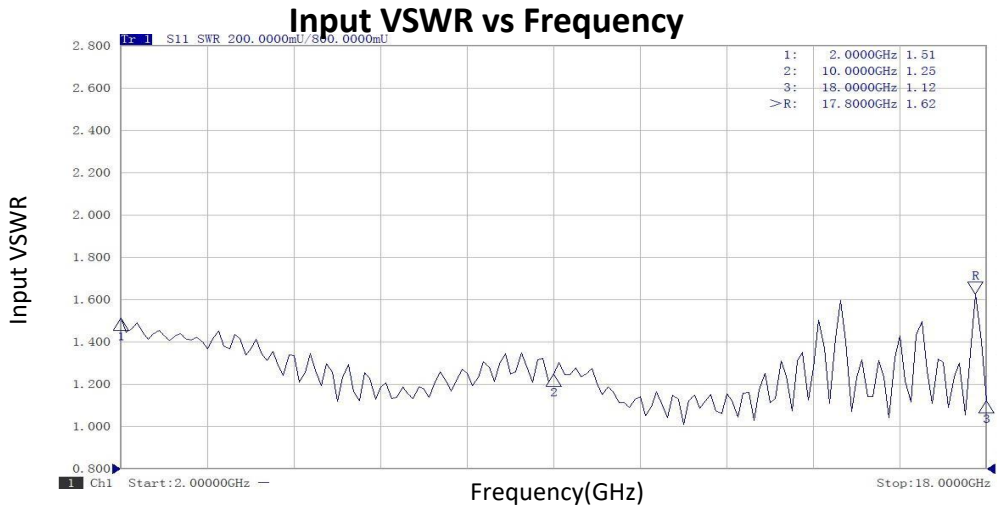


P1dB vs Frequency

P1dB (dBm)

:
Pout@Pin

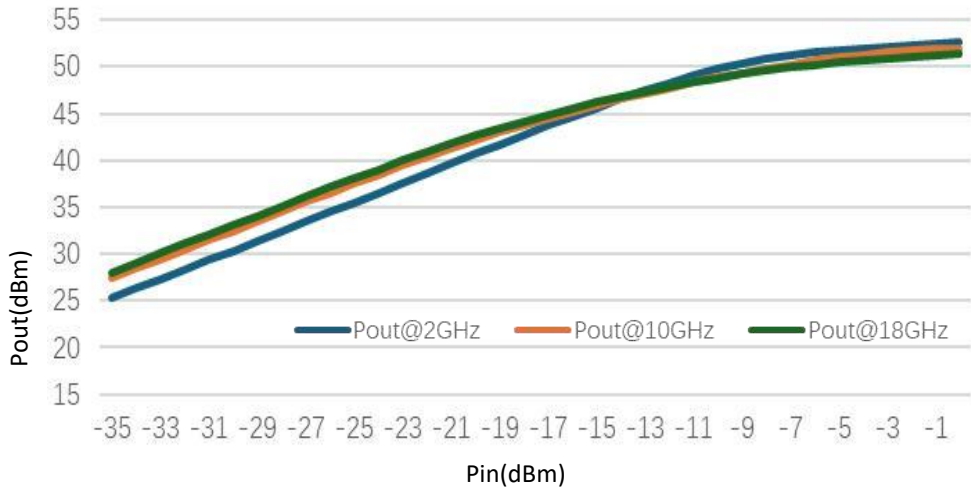

Pout@Equal_Pin

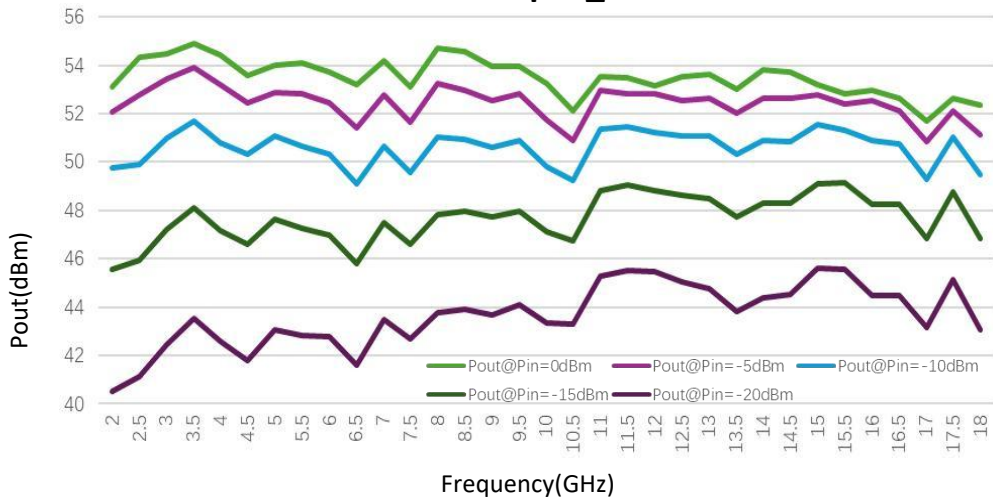

Spurious vs Frequency

Spurious(dBc)

典型曲线 Typical Performance Data:

