

Power Amplifier

40-50GHz/33dB Gain/33dBm Psat

TLPA40G50G-33-33

TURPA40G50G-3333 is a power amplifier with a minimum power gain of 33 dB and a minimum Psat of 33 dBm across the frequency range of 40 to 50 GHz. The DC power requirement for the amplifier is +18VDC/2.5 A. The input and output port configuration offers coax adapter structure with 2.4mm female.

Features:

- Frequency range: 40-50GHz
- Gain: 33dB Min
- Output Power Psat: 33dBm Min
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range		40-50		GHz
功率增益 Power Gain	33			dB
增益平坦度 Gain Flatness		±2.5		dB
饱和输出功率 Output Psat	33	34		dBm
杂散 Spurious			-50	dBc
输入驻波 Input VSWR		3		:1
直流电压 DC Voltage		18	20	V DC
直流电流 DC Supply Current			2.5	A
阻抗 Impedance		50		Ohms

机械特性 Mechanical Specifications:




参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	2.4mm Female/2.4mm Female	
直流偏置 DC Bias	Feedthru capacitors	
尺寸 Size	60*60*11(Without heatsink) 188*125*146(With heatsink)	mm
重量 Weight	≤300	g

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+20 V
输入功率 RF Input Power	+5 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形图 Outline Drawing:

Unit:mm

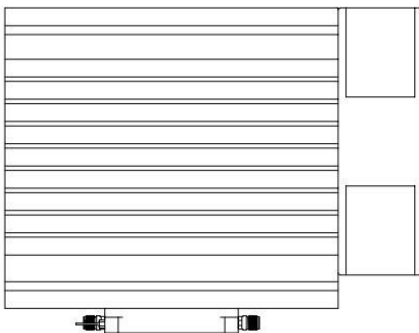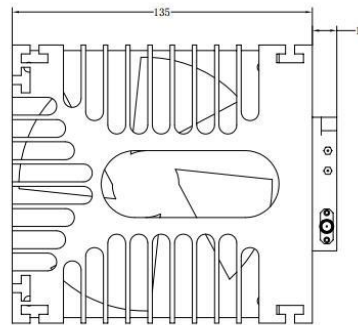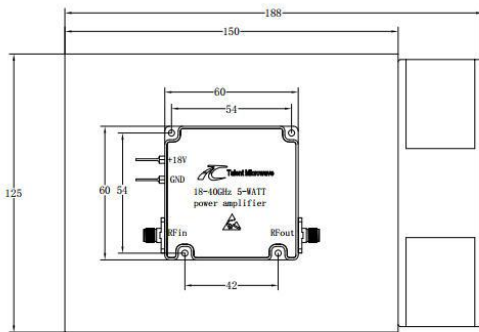

温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature*	-40		+60	°C
存储温度 Non-operating Temperature*	-50		+70	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

*Note: For a wider temperature range, please consult the manufacturer.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TURPA40G50G-3333	Power amplifier 40-50GHz, Gain:33dB,Psat:33dBm,+18V DC,Without Heatsink	Rev.1.1
TURPA40G50G-3333 HS	Power amplifier 40-50GHz, Gain:33dB,Psat:33dBm,+18V DC,With Heatsink	Rev.1.1


典型曲线 Typical Performance Data:

VSWR&Gain vs Frequency


VSWR&Gain

典型曲线 Typical Performance Data:

Gain vs Output Power

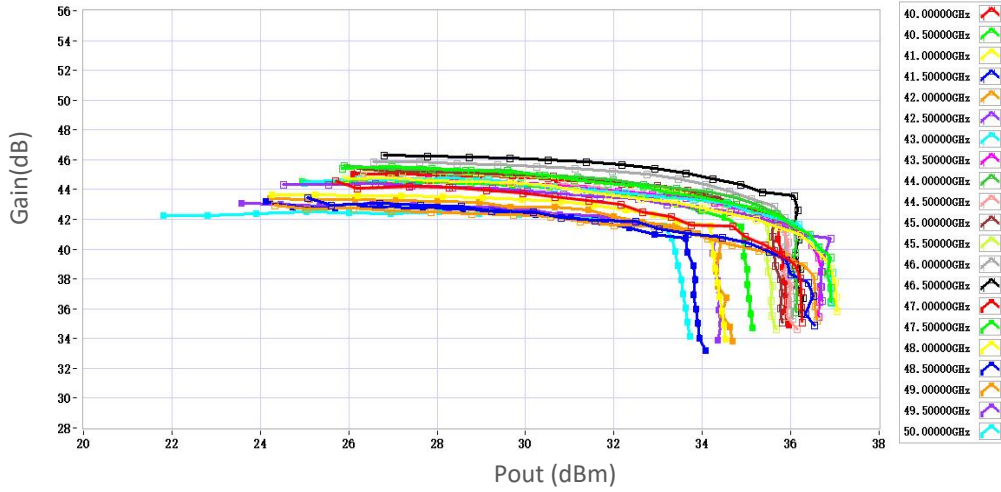


P1dB vs Frequency

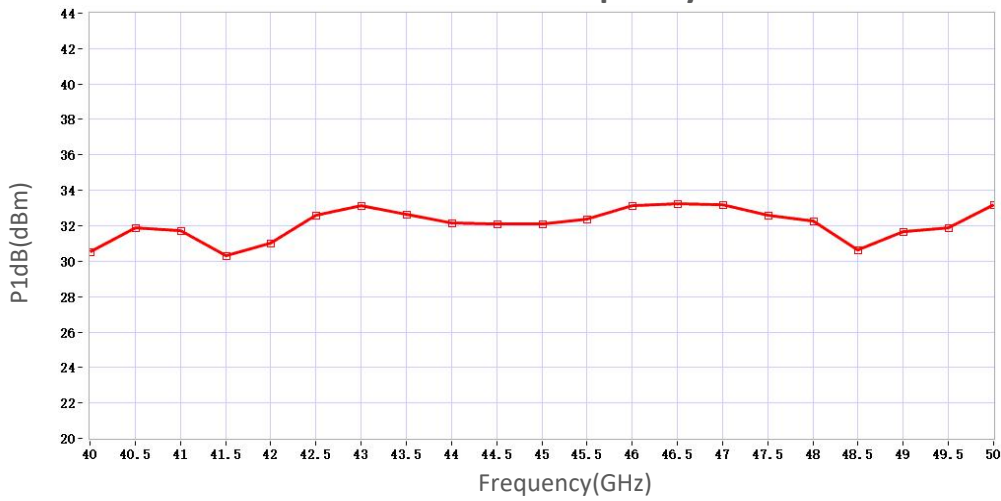

P3dB vs Frequency

P3dB(dBm)

典型曲线 Typical Performance Data:

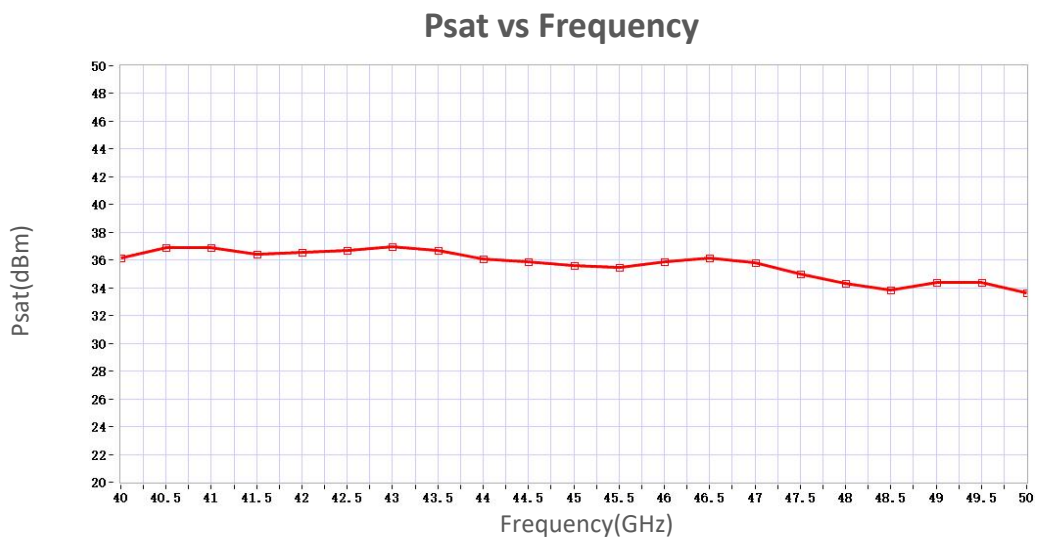

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.