


|   |                                       |                             |
|---|---------------------------------------|-----------------------------|
|  | 产品规格书<br><b>Product Specification</b> | 规格型号<br><b>Product Mode</b> |
|   |                                       | <b>F2-SMAMSMAM-L</b>        |

示意图 Sketch Map:

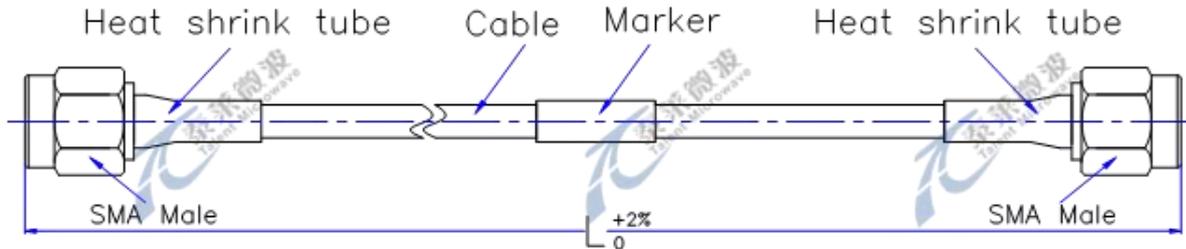

**电性能&机械性能 Electrical & Mechanical Characteristics**

|  |             |
|--|-------------|
| 特性阻抗 Impedance(Ohm)                      | 50          |
| 截止频率 Operating Frequency(GHz)            | 11          |
| 介质耐压 Dielectric Withstanding Voltage(V)  | 1200        |
| 电压驻波比 VSWR                               | 1.25:1@6GHz |
| 屏蔽效率 Shielding Effectiveness(dB)         | 80          |
| 传播速率 Velocity Of Propagation (%)         | 70          |
| 静态最小弯曲半径 Min. Bending Radius Static (mm) | 25          |
| 工作温度 Operating Temperature(°C)           | -55~+125    |
| 电缆直径 Cable Diameter (mm)                 | 4.95        |

| 产品型号<br>Part Number                | 最大插入损耗 Max Insertion Loss ≤ (dB) |        |        |        |
|------------------------------------|----------------------------------|--------|--------|--------|
|                                    | 1.0GHz                           | 3.0GHz | 5.0GHz | 6.0GHz |
| F2-SMAMSMAM-0.5M                   | 0.27                             | 0.50   | 0.66   | 0.81   |
| F2-SMAMSMAM-1.0M                   | 0.48                             | 0.89   | 1.18   | 1.47   |
| F2-SMAMSMAM-2.0M                   | 0.91                             | 1.67   | 2.23   | 2.79   |
| 电缆连续波功率 Power CW for Cable (Watts) | 400                              | 240    | 185    | 170    |

接头类型和长度可接受定制，型号编码指南

(part number coding for different connector and different length)

