

## SPDT Coaxial Switches

R12-KL12040 , Coaxial Switches , SPDT , SMA , Latching , 12VDC , DC to 40 GHz , Solder Pin  
 R12-KL24040 , Coaxial Switches , SPDT , SMA , Latching , 24VDC , DC to 40 GHz , Solder Pin  
 R12-KL28040 , Coaxial Switches , SPDT , SMA , Latching , 28VDC , DC to 40 GHz , Solder Pin

### 电气参数 Electrical Characteristics:

参数Parameter	条件Condition
频率范围 Frequency range	DC-40GHz
阻抗 Impedance	50 Ω
开关模式 Operation mode	Latching
开关顺序 Switch sequence	Break before make
切换时间 Switching time	15 ms max
机械寿命 Mechanical life	5 million min
额定电压 Rated voltage	12 24 28 VDC
工作电流 Operating current at 23 °C	200 90 80 mA



### 射频特性 RF Specifications:


频率范围 FREQUENCY RANGE(GHz)	DC-6	6-12	12-18	18-26.5	26.5-40
插入损耗 INSERTION LOSS (MAX) dB	0.2	0.25	0.4	0.7	1.0
隔离度 ISOLATION (MIN) dB	70	70	60	55	50
电压驻波比 V.S.W.R. (MAX)	1.2:1	1.3:1	1.4:1	1.7:1	2.0:1

### 环境和物理特性 Environmental And Physical Characteristics:

参数Parameter	条件 Condition
工作温度范围 Operating temperature range	-25°C to +65°C(Standard ) -55°C to +85°C(Optional)
振动 Sine vibration(Operating)	20-2000Hz , 10g
冲击 Shocks(Non Operating)	50g / 12ms, ½ sine
射频接口 RF Connector type	2.92 Female



## 针脚定义 Pin Definition:

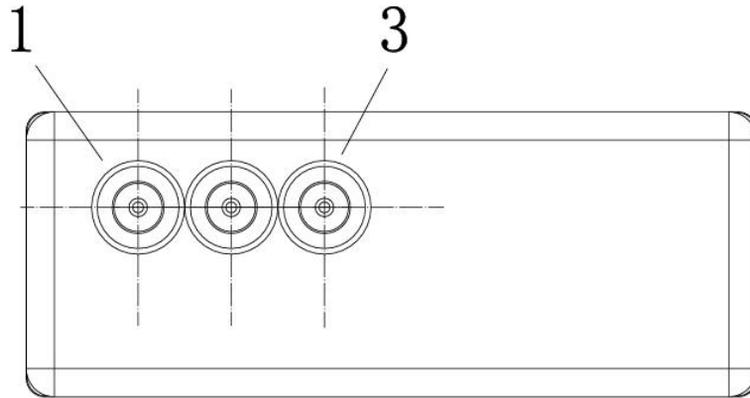

Solder Pin		RF Connect Used
Pin NO.	Function	SPDT
1	V1	J1-COM
2	COM-	
3	V2	J2-COM

## 标准型号 Part Number:

标准型号 Part Number

额定电压  
Rated Voltage

可选项 Option

SPDT


R12-KL12040

12VDC


-S

## 典型曲线 Typical Performance Data:

### INSERTION LOSS

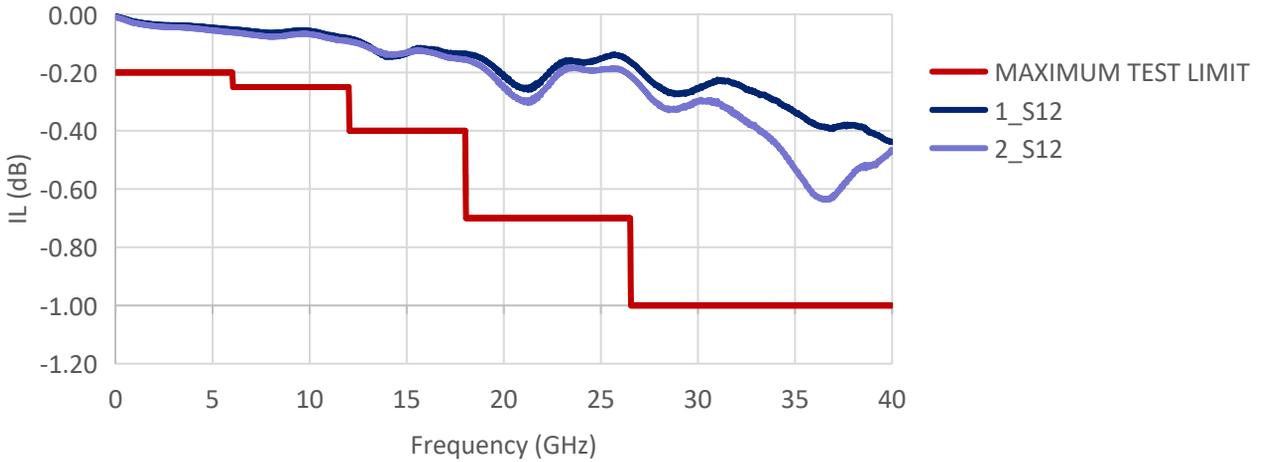

### VSWR

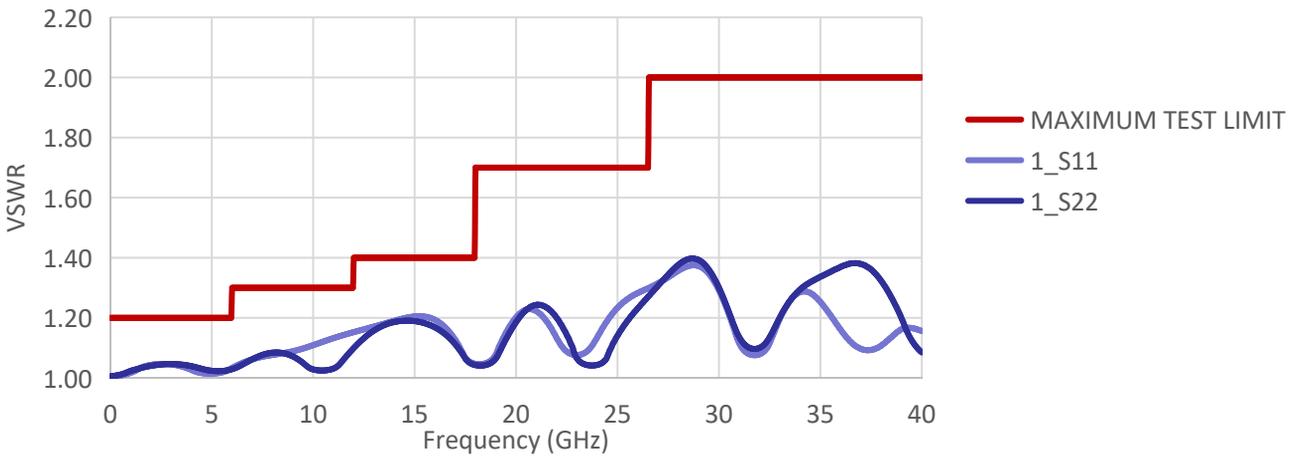

### ISOLATION

