

# 1P7T , Terminated , Coaxial Switches

R17-SN12T18-DT , Coaxial Switches , 1P7T, SMA , Normally Open , 12VDC , TTL , DC to 18GHz , DSUB-15 , Terminated  
 R17-SN24T18-DT , Coaxial Switches , 1P7T, SMA , Normally Open , 24VDC , TTL , DC to 18GHz , DSUB-15 , Terminated  
 R17-SN28T18-DT , Coaxial Switches , 1P7T, SMA , Normally Open , 28VDC , TTL , DC to 18GHz , DSUB-15 , Terminated

## 电气参数 Electrical Characteristics:

参数Parameter	条件Condition
频率范围 Frequency range	DC-18GHz
阻抗 Impedance	50 Ω
开关模式 Operation mode	Normally Open
开关顺序 Switch sequence	Break before make
切换时间 Switching time	15 ms max
机械寿命 Mechanical life	1 million min
TTL input	0-0.8 V(OFF), 2.4-5 V(ON)
负载功率 Termination power CW	0.5W
额定电压 Rated voltage	12 24 28 VDC
工作电流 Operating current at 23 °C	330 167 140 mA




## 射频特性 RF Specifications:

频率范围 FREQUENCY RANGE(GHz)	DC-6	6-12	12-18
插入损耗INSERTION LOSS (MAX) dB	0.3	0.4	0.5
隔离度 ISOLATION (MIN) dB	80	70	60
电压驻波比 V.S.W.R. (MAX)	1.3:1	1.4:1	1.5:1


## 环境和物理特性 Environmental And Physical Characteristics:

参数Parameter	条件 Condition
工作温度范围 Operating temperature range	-25°C to +65°C(Standard ) -55°C to +85°C(Optional)
振动 Sine vibration(Operating)	20-2000Hz , 10g
冲击 Shocks(Non Operating)	50g / 11ms, ½ sine
射频接口 RF Connector type	SMA Female

## 外形尺寸 Outline Drawing: Unit: mm

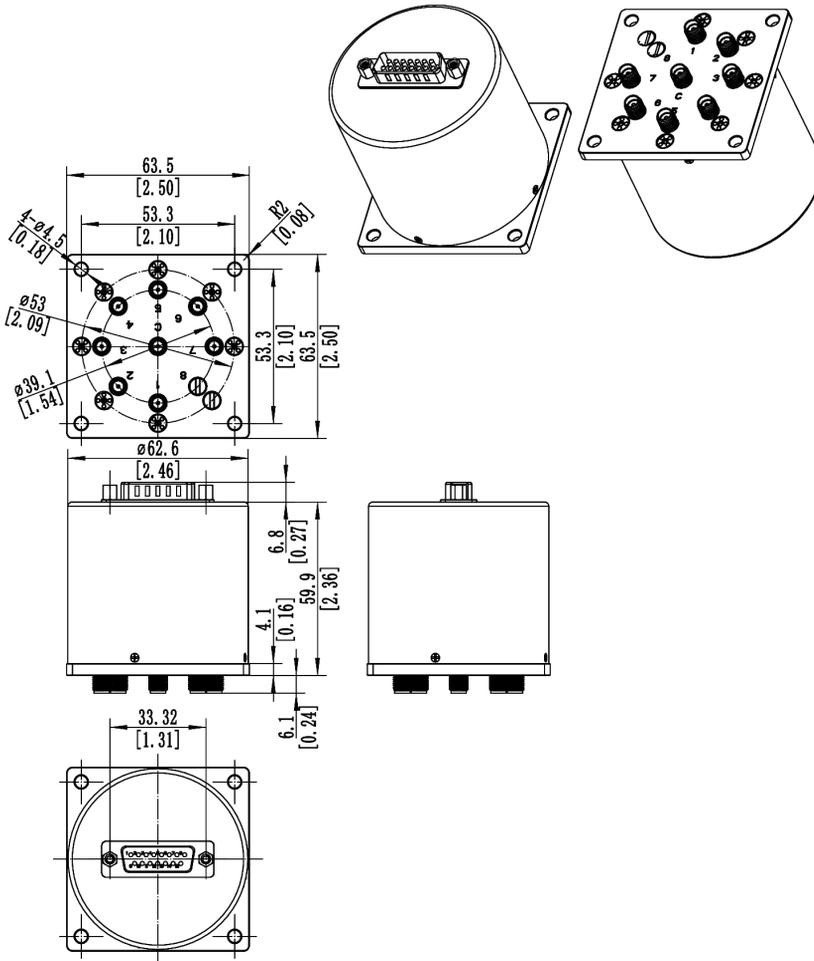


## 原理图 Schematic:

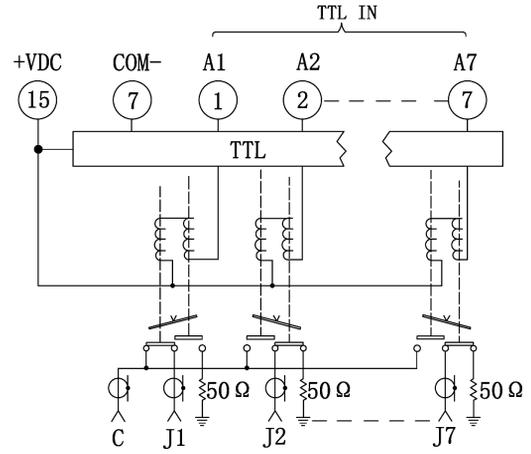

## 功率曲线图 Average power:

- This graph is based on the following conditions:
- Ambient temperature: + 25 °C
  - Sea level
  - V.S.W.R.: 1 and cold switching

## 针脚定义 Pin Definition:

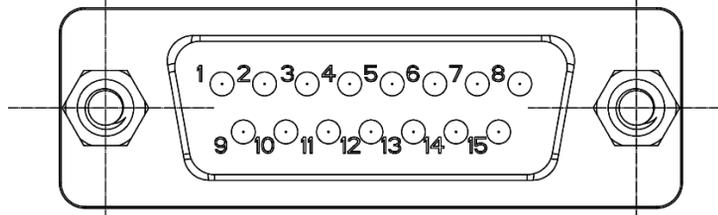

15 PIN D-SUB		RF Connect Used
Pin NO.	Function	SP7T
1	A1 (TTL IN)	1
2	A2 (TTL IN)	2
3	A3 (TTL IN)	3
4	A4 (TTL IN)	4
5	A5 (TTL IN)	5
6	A6 (TTL IN)	6
7	A7(TTL IN)	7
8	UNUSED	
9	COM-	
15	+VDC	
10-14	UNUSED	

## 标准型号 Part Number:

标准型号 Part Number


1P7T

额定电压  
 Rated Voltage


可选项 Option

## 典型曲线 Typical Performance Data:

### VSWR

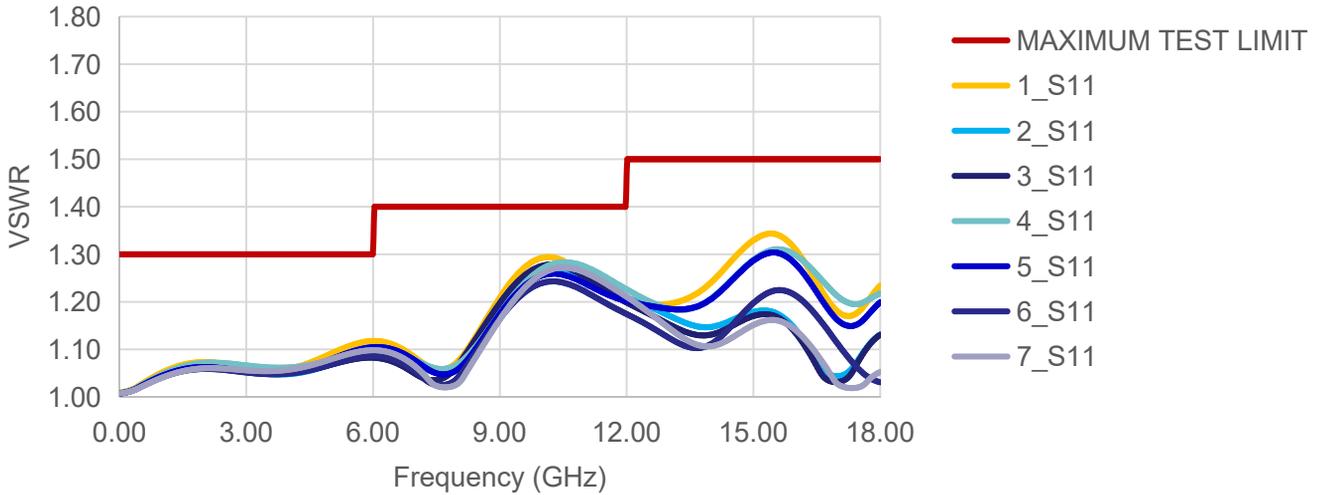

### INSERTION LOSS

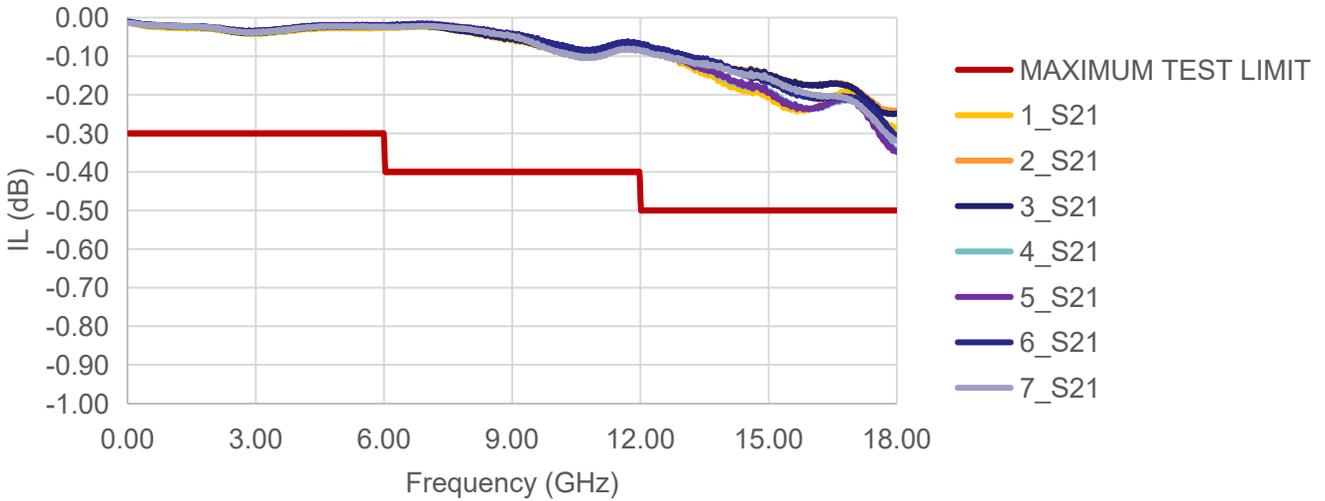

### ISOLATION

