

Part No: RAXXA10-N-6

N Attenuators • Male to Female • DC - 6 GHz - 10 W

电气特性 ELECTRICAL


- **Frequency Range** DC - 6 GHz
- **Attenuation (dB)**
 - 1 through 9 ± 0.5 dB
 - 10 ± 0.6 dB
 - 20 ± 0.6 dB
 - 30 ± 0.6 dB
 - 40 ± 0.8 dB
- **VSWR (MAX)**
 - DC – 3 GHz..... 1.20 : 1
 - 3 – 6 GHz.....1.25 : 1
- **Impedance** 50 Ohms
- **RF Power Nominal** 10 Watts Average at 25°C
 PEAK: 1000 Watts
 (5 μ Sec Pulse Width , 1% Duty Cycle)

机械特性 MECHANICAL

- **Temperature Range** -55°C - +125°C
- **Connectors** Brass ,Nickel Plated
- **Connector Pins** Beryllium Copper, Gold Plated
- **Body** Aluminum
- **Insulators** PTFE, Virgin Electrical Grade

订货信息 ORDER

Model Number : RAXXA10-N-6
 └──────────┬──────────┘
 dB Value

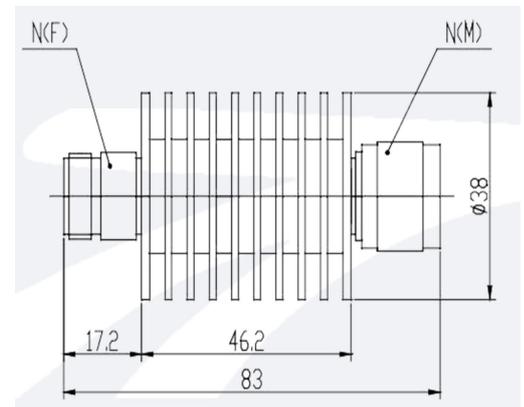

Connector: N and TNC are optional.
 Unit:mm