

Part No: RAXXA25-S-6

SMA Attenuators • Male to Female • DC – 6 GHz - 25 W

电气特性 ELECTRICAL


- **Frequency Range** DC – 6 GHz
- **Attenuation (dB)**
 - 1 through 9 ± 0.5 dB
 - 10± 0.6 dB
 - 20 ± 0.75 dB
 - 30 ± 0.75 dB
 - 40 ± 1.0 dB
 - 50 ± 1.5 dB
- **VSWR (MAX)**
 - DC – 2 GHz.....1.15 : 1
 - 2 – 6 GHz.....1.25 : 1
- **Impedance** 50 Ohms
- **RF Power Nominal** 25 Watts Average at 25°C
 PEAK: 1000 Watts
 (5 μSec Pulse Width , 2.5% Duty Cycle)

机械特性 MECHANICAL

- **Temperature Range** -55°C - +125°C
- **Connectors** Brass ,Nickel Plated
- **Connector Pins** Beryllium Copper, Gold Plated
- **Body** Black, Finned Aluminum
- **Insulators** PTFE, Virgin Electrical Grade

订货信息 ORDER

Model Number : RAXXA25-S-6
 └──────────┬──────────┘
 dB Value

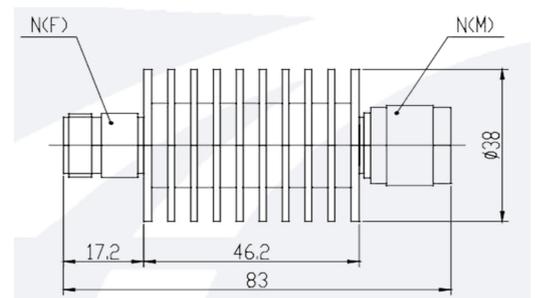

Connector: SMA,TNC and N are optional.
 Unit:mm