

**Part No: RAXXA25-S-8**


**SMA Attenuators • Male to Female • DC – 8 GHz - 25 W**

**电气特性 ELECTRICAL**

- **Frequency Range** DC – 8 GHz
- **Attenuation (dB)**
  - 10 .....± 0.4 dB
  - 20 ..... ± 0.5 dB
  - 30 ..... ± 0.5 dB
  - 40 ..... ± 0.5 dB
- **VSWR (MAX)** DC – 8 GHz..... 1.20 : 1
- **Impedance** 50 Ohms
- **RF Power Nominal** 25 Watts Average at 25°C  
 PEAK: 1000 Watts  
 (5 μSec Pulse Width , 2.5% Duty Cycle)

**机械特性 MECHANICAL**

- **Temperature Range** -55°C - +125°C
- **Connectors** Brass ,Nickel Plated
- **Connector Pins** Beryllium Copper, Gold Plated
- **Body** Black, Finned Aluminum
- **Insulators** PTFE, Virgin Electrical Grade

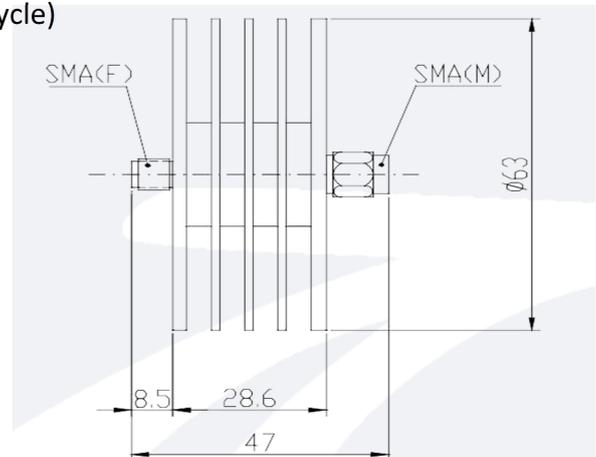

Unit:mm

**订货信息 ORDER**

Model Number : RAXXA25-S-8  
 └──────────┬──────────┘  
 dB Value