

## Power divider/Combiner 16 Way SMA 50Ω 10 to 20 GHz

### 电气特性 Electrical:


工作频率 Frequency Range:	10-20GHz
插入损耗 Insertion Loss:	≤3.4dB
驻波 VSWR:	≤1.70 : 1
隔离 Isolation:	≥16dB
幅度平衡 Amplitude Balance:	≤±0.8dB
相位平衡 Phase Balance:	≤±8°
耐功率 Power Handling:	30 Watt
阻抗 Impedance:	50 OHMS

### 机械特性 Mechanical :

温度范围 Temperature Range:	-55° C - +85° C
接口 Connectors:	SMA-Female
相对湿度 Relative Humidity:	0 ~ 90%


### 外形尺寸 Outline Drawing:

Unit: mm

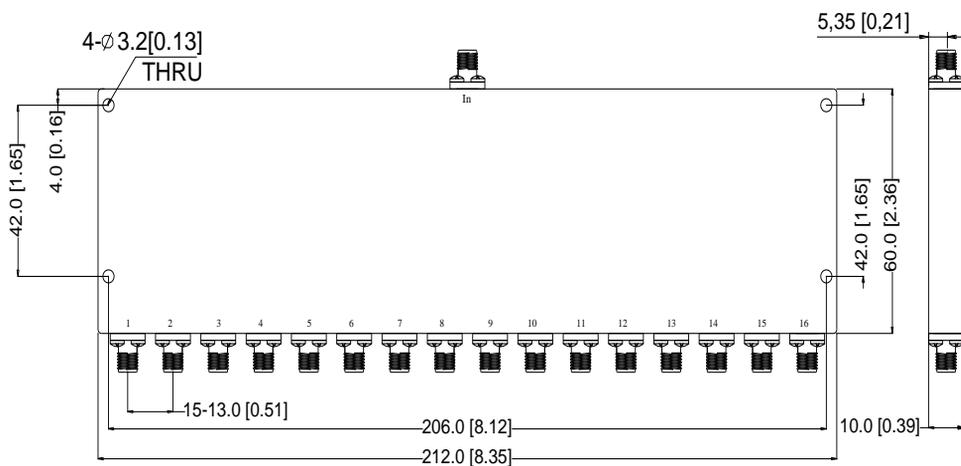

Trc2 Mem6[Trc2] S21 dB Mag 2 dB / Ref -18 dB Cal Invisible

2 of 4 (Max)

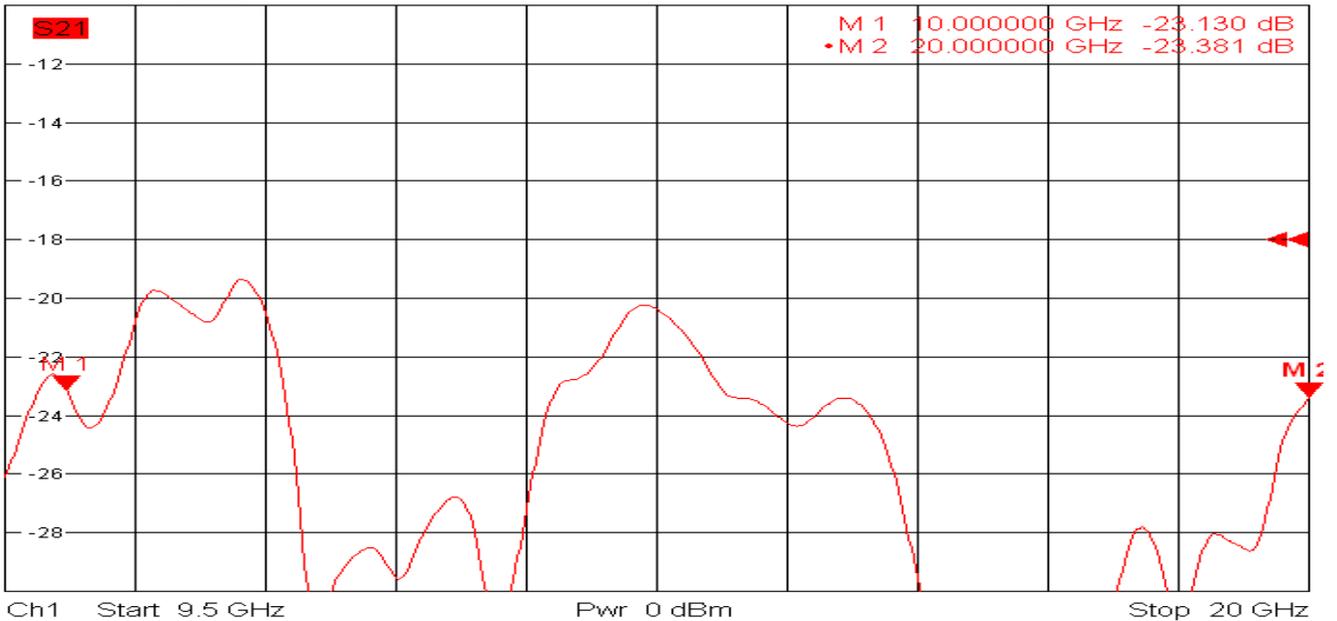

Ch1 Start 9.5 GHz

Pwr 0 dBm

Stop 20 GHz

11/8/2018, 10:34 AM