

Power divider/Combiner 16 Way SMA 50Ω 3 to 12GHz

电气特性 Electrical:


| | |
|-------------------------|-----------|
| 工作频率 Frequency Range: | 3-12GHz |
| 插入损耗 Insertion Loss: | ≤2.8dB |
| 驻波 VSWR: | ≤1.80 : 1 |
| 隔离 Isolation: | ≥15dB |
| 幅度平衡 Amplitude Balance: | ≤± 1.0dB |
| 相位平衡 Phase Balance: | ≤± 10° |
| 耐功率 Power Handling: | 30 Watt |
| 阻抗 Impedance: | 50 OHMS |

机械特性 Mechanical :


| | |
|-------------------------|-----------------|
| 温度范围 Temperature Range: | -55° C - +85° C |
| 接口 Connectors: | SMA-Female |
| 相对湿度 Relative Humidity: | 0 ~ 90% |

外形尺寸 Outline Drawing:

Unit: mm

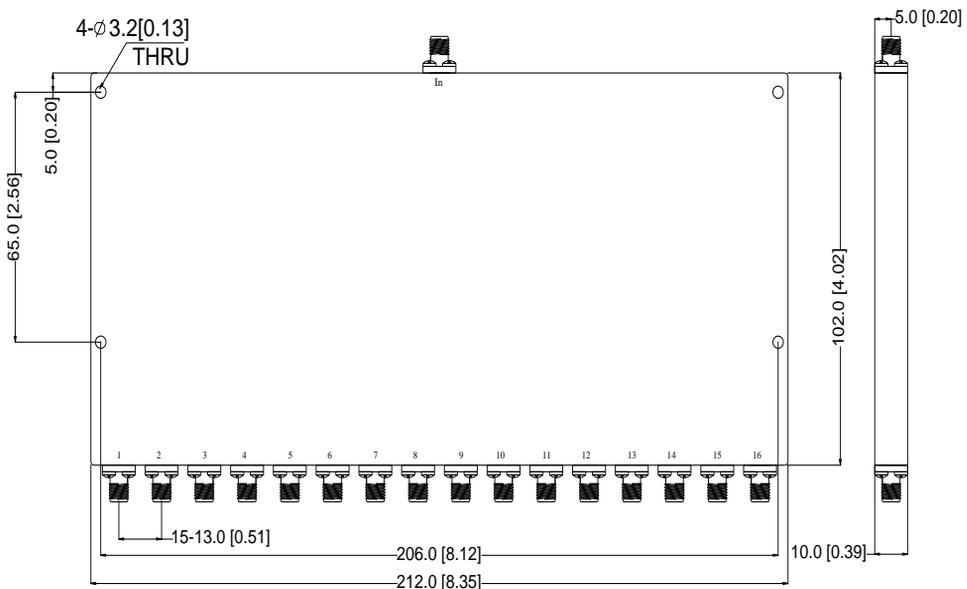

Trc2 S21 dB Mag 2 dB / Ref -16 dB Cal 2 of 4 (Max)
Mem6[Trc2] S21 dB Mag 2 dB / Ref -16 dB Invisible

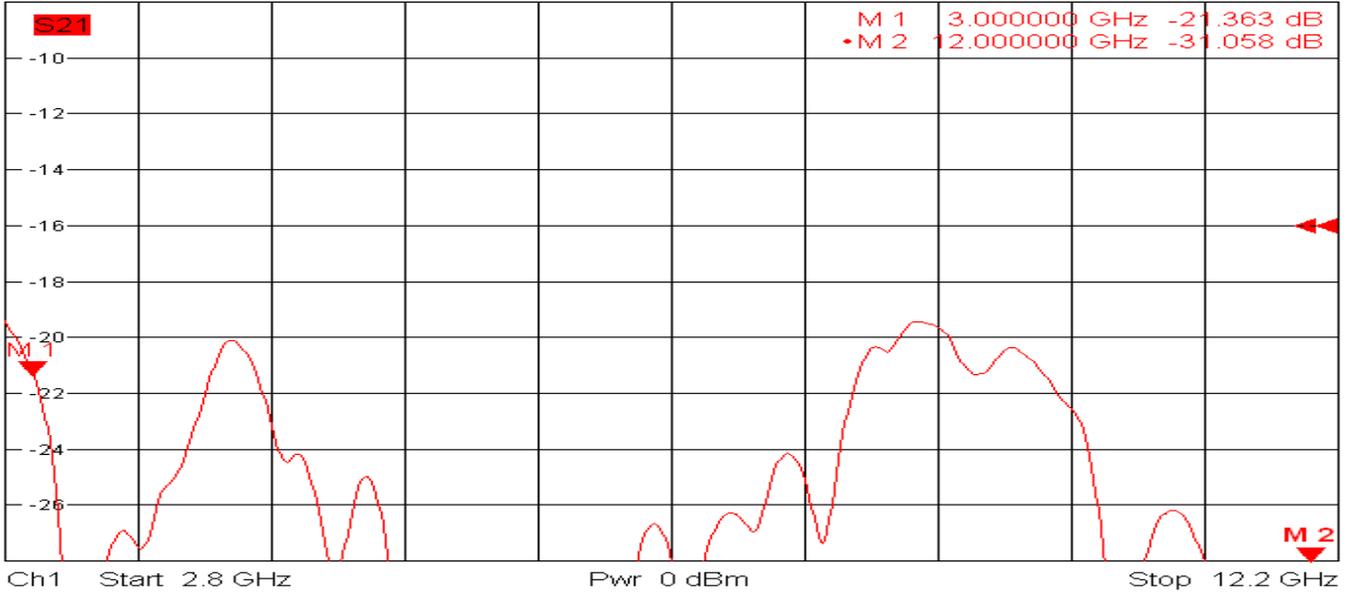

5/30/2019, 10:45 AM