

Part No.: RS2W0330-S

Power divider/Combiner 2 Way SMA 50Ω 0.3 to 3.0 GHz

电气特性 Electrical:

工作频率 Frequency Range:	0.3-3.0GHz
插入损耗 Insertion Loss:	≤1.3dB
驻波 VSWR:	≤1.40 : 1 (Max)
隔离 Isolation:	≥18dB
幅度平衡 Amplitude Balance:	≤±0.5dB
相位平衡 Phase Balance:	≤±5°
耐功率 Power Handling:	≤30Watt
阻抗 Impedance:	50 OHMS





机械特性 Mechanical:

温度范围 Temperature Range:	-55° C - +85° C
接口 Connectors:	SMA-Female
相对湿度 Relative Humidity:	0 ~ 90%

外形尺寸 Outline Drawing:

Unit: mm

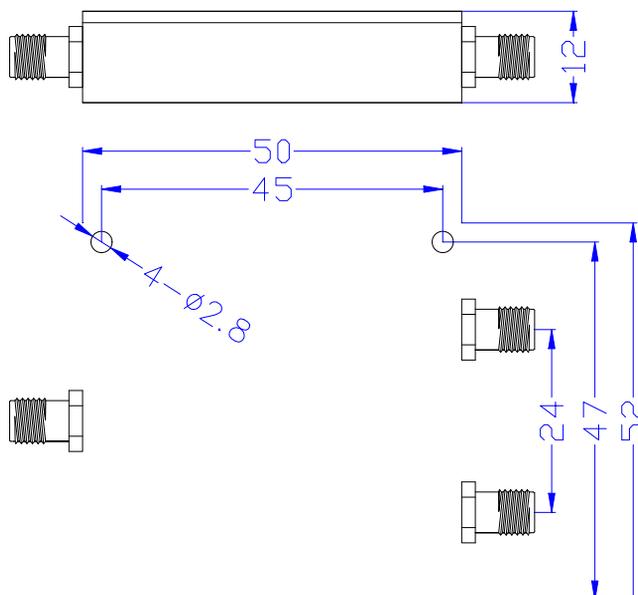

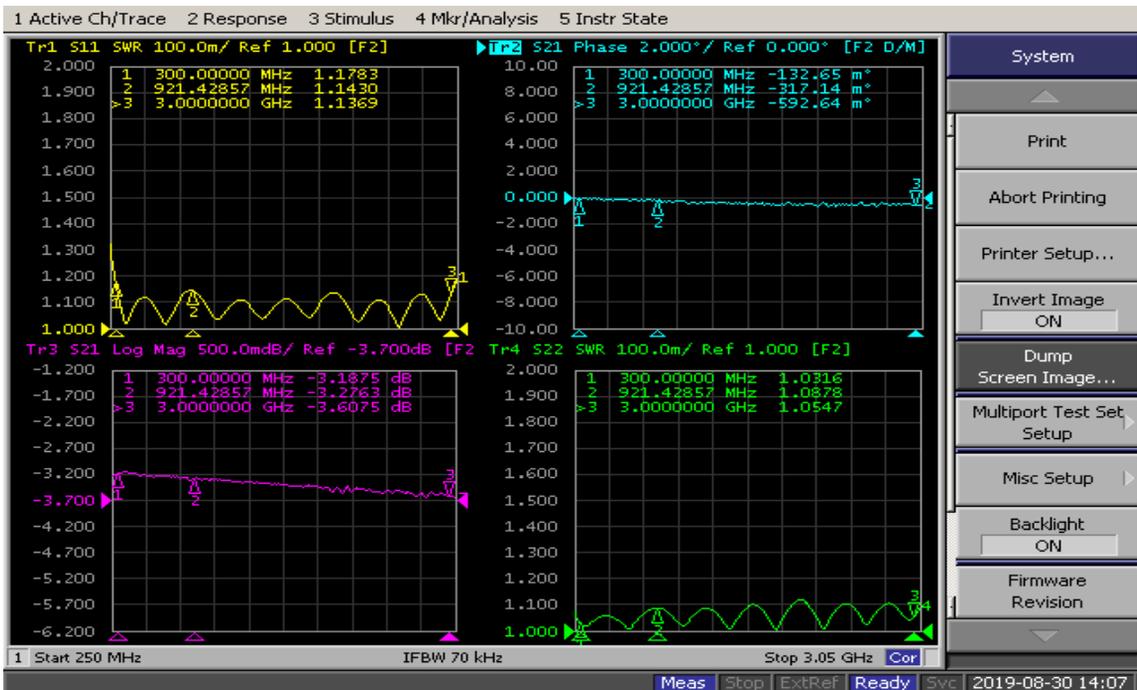



Turpanic Co, Ltd

Email: johnny@turpanic.com

Mob/WeChat/WhatsApp: +8613088887527