

Power divider/Combiner 2Way N 50Ω 0.4to 6 GHz

电气特性 Electrical:


工作频率 Frequency Range:	0.4-6 GHz
插入损耗 Insertion Loss:	≤1.4dB
驻波 VSWR:	≤1.35 : 1
隔离 Isolation:	≥20dB
幅度平衡 Amplitude Balance:	≤±0.2dB
相位平衡 Phase Balance:	≤±4°
耐功率 Power Handling:	20 Watt
阻抗 Impedance:	50 OHMS

机械特性 Mechanical :

温度范围 Temperature Range:	-55° C - +85° C
接口 Connectors:	N-Female
相对湿度 Relative Humidity:	0 ~ 90%

外形尺寸 Outline Drawing:

Unit: mm

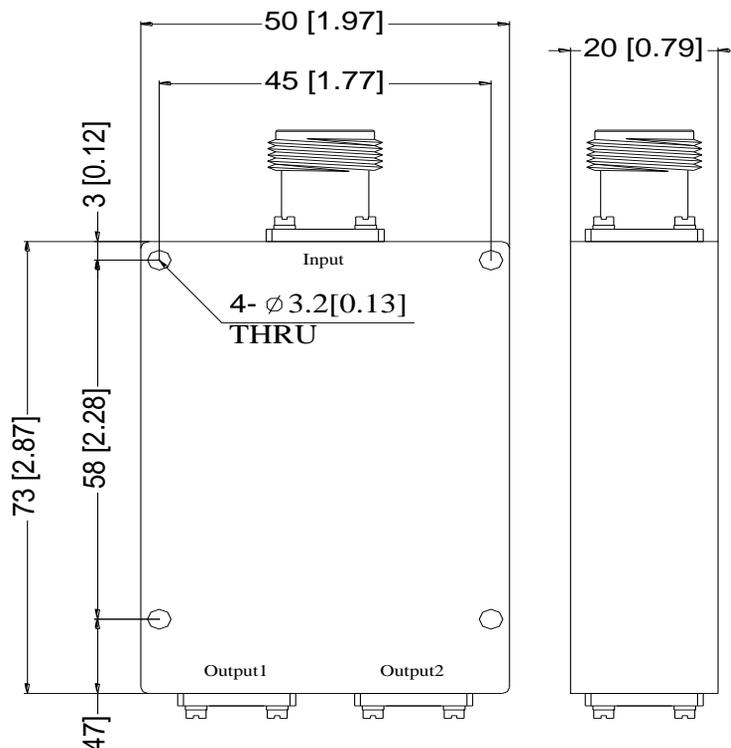



Turpanic Co, Ltd

Email: johnny@turpanic.com

Mob/WeChat/WhatsApp: +8613088887527



Turpanic Co, Ltd

Email: johnny@turpanic.com

Mob/WeChat/WhatsApp: +8613088887527