

## Power divider/Combiner 2 Way SMA 50Ω 1 to 8GHz


### 电气特性 Electrical:

工作频率 Frequency Range:	1-8 GHz
插入损耗 Insertion Loss:	≤1.0dB
驻波 VSWR:	≤1.5 : 1
隔离 Isolation:	≥20dB
幅度平衡 Amplitude Balance:	≤±0.4dB
相位平衡 Phase Balance:	≤±5°
耐功率 Power Handling:	30 Watt
阻抗 Impedance:	50 OHMS

### 机械特性 Mechanical :

温度范围 Temperature Range:	-55° C - +85° C
接口 Connectors:	SMA-Female
相对湿度 Relative Humidity:	0 ~ 90%

### 外形尺寸 Outline Drawing:

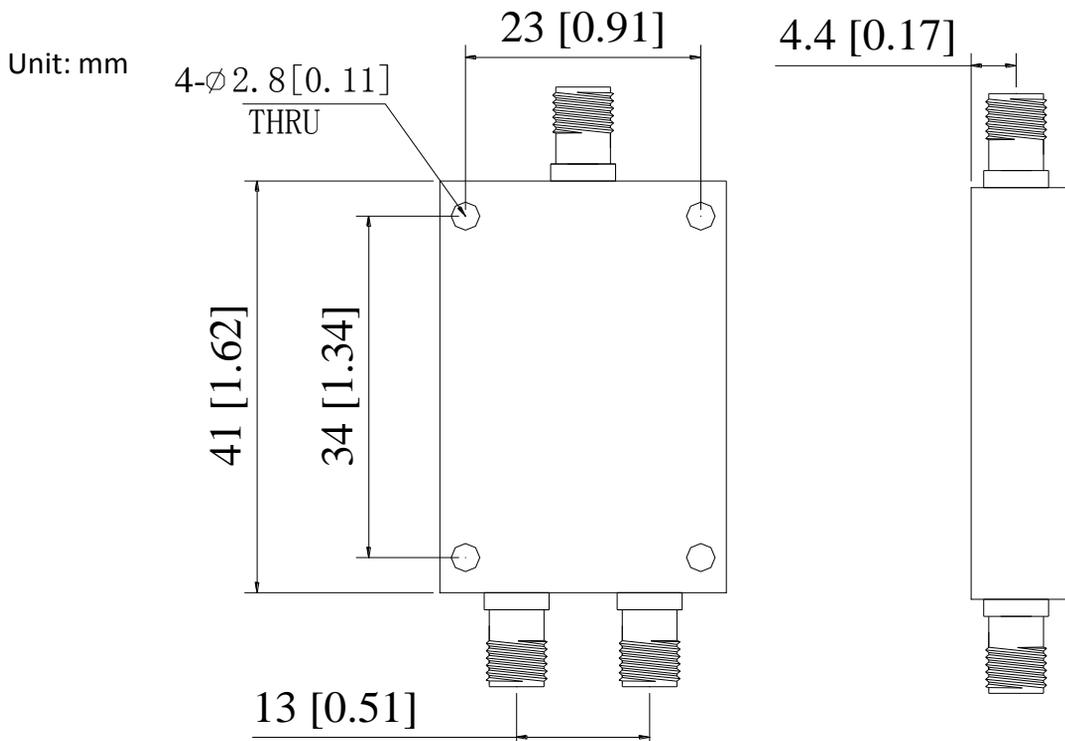



Turpanic Co, Ltd

Email: [johnny@turpanic.com](mailto:johnny@turpanic.com)

Mob/WeChat/WhatsApp: +8613088887527