

Power divider/Combiner 2 Way SMA 50Ω 6 to 26.5 GHz

电气特性 Electrical:


工作频率 Frequency Range:	6-26.5 GHz
插入损耗 Insertion Loss:	≤1.1dB
驻波 VSWR:	≤1.7/1.5: 1
隔离 Isolation:	≥16dB
幅度平衡 Amplitude Balance:	≤±0.3dB
相位平衡 Phase Balance:	≤±3°
耐功率 Power Handling:	30 Watt
方向功率 Reverse Power :	2 Watt
阻抗 Impedance:	50 OHMS

机械特性 Mechanical :

温度范围 Temperature Range:	-55° C - +85° C
接口 Connectors:	SMA-Female
相对湿度 Relative Humidity:	0 ~ 90%

外形尺寸 Outline Drawing:

Unit: mm

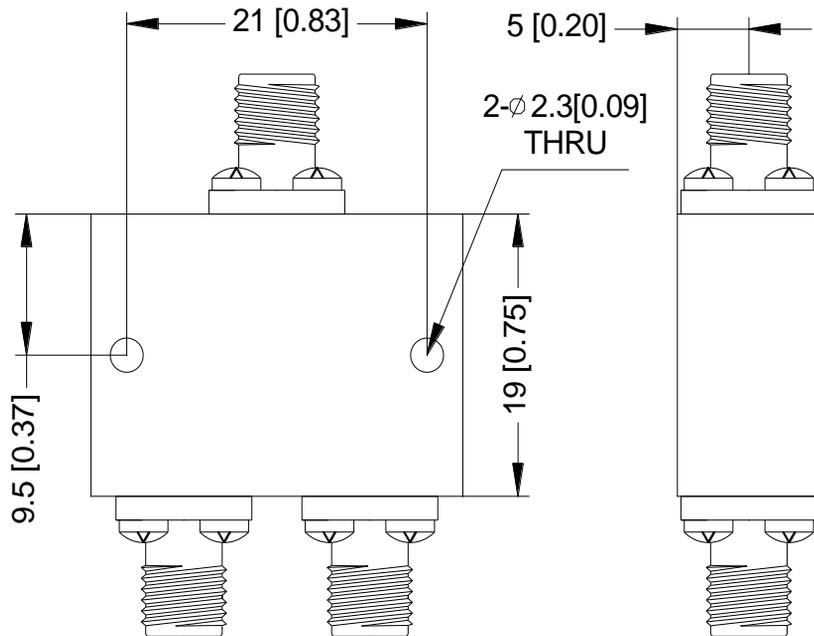



Turpanic Co, Ltd

Email: johnny@turpanic.com

Mob/WeChat/WhatsApp: +8613088887527