

Power divider/Combiner 4Way SMA 50Ω 0.5 to 18 GHz

电气特性 Electrical:


工作频率 Frequency Range: 0.5-18 GHz
 插入损耗 Insertion Loss: $\leq 2.4\text{dB}$
 驻波 VSWR: $\leq 2.0/1.5 : 1$
 隔离 Isolation: Max $\geq 15\text{dB}$ Typ:18dB
 幅度平衡 Amplitude Balance: $\leq \pm 0.5\text{dB}$
 相位平衡 Phase Balance: $\leq \pm 8^\circ$
 耐功率 Power Handling: 30 Watt
 阻抗 Impedance: 50 OHMS





机械特性 Mechanical :

温度范围 Temperature Range: $-55^\circ\text{C} - +85^\circ\text{C}$
 接口 Connectors: SMA-Female
 相对湿度 Relative Humidity: 0 ~ 90%

外形尺寸 Outline Drawing:

Unit: mm

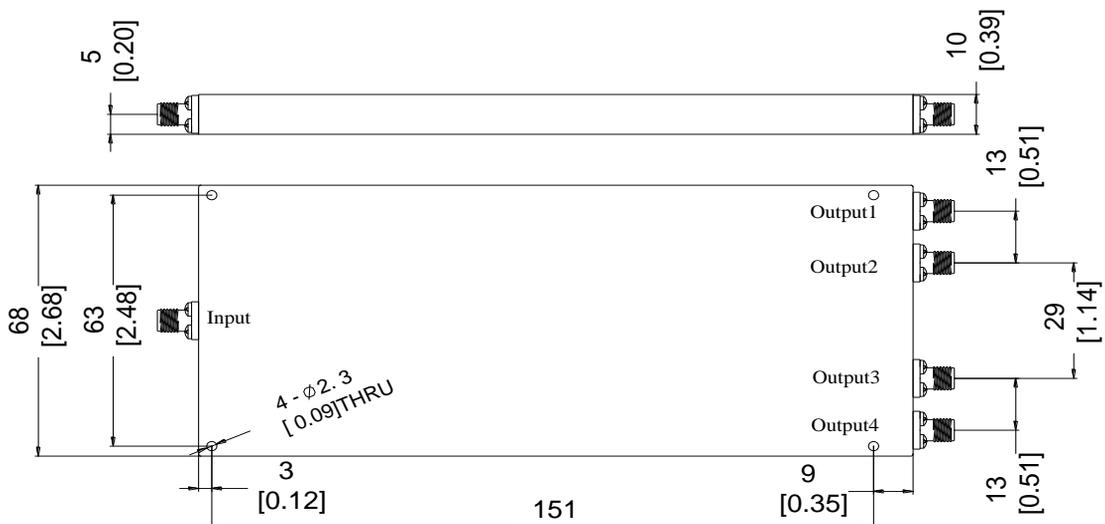

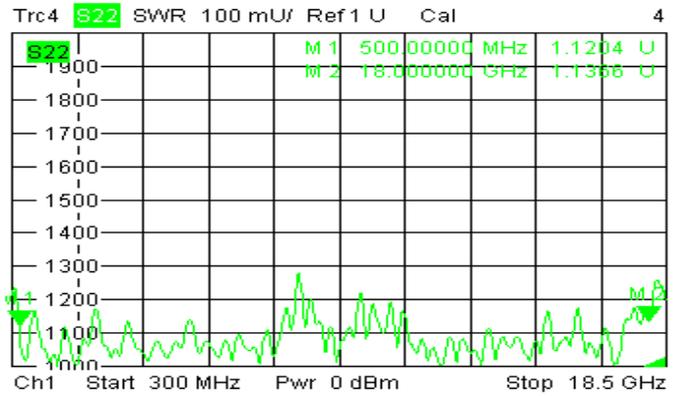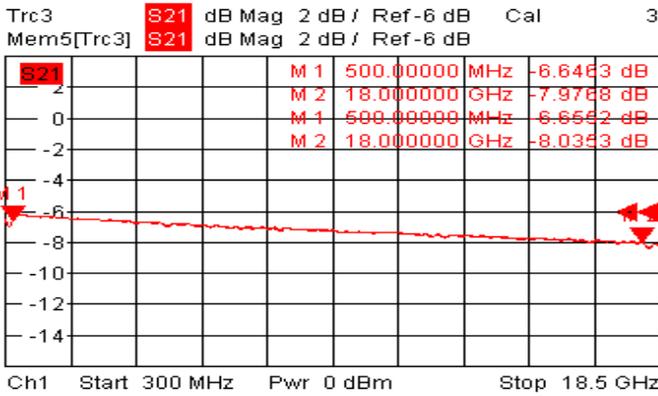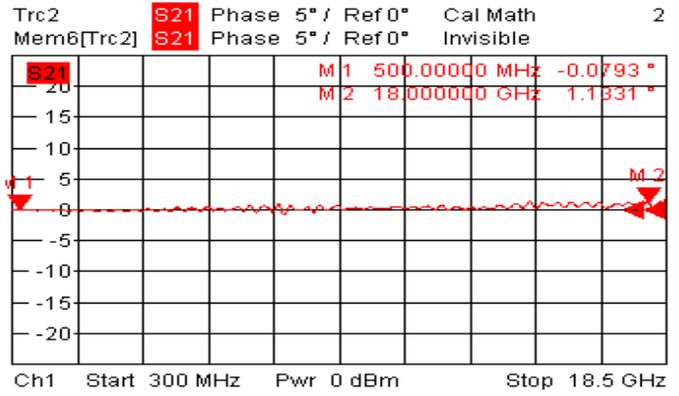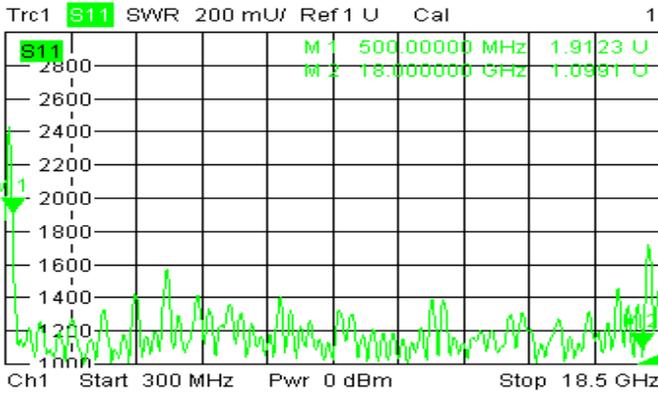

6/25/2019, 10:16 AM