

## Power divider/Combiner 4 Way 2.92 50Ω 18 to 31 GHz

### 电气特性 Electrical:


工作频率 Frequency Range:	18-31 GHz
插入损耗 Insertion Loss:	≤1.6dB
驻波 VSWR:	≤1.6 : 1
隔离 Isolation:	≥16dB
幅度平衡 Amplitude Balance:	≤±0.5dB
相位平衡 Phase Balance:	≤±8°
耐功率 Power Handling:	20 Watt
方向功率 Reverse Power :	2 Watt
阻抗 Impedance:	50 OHMS

### 机械特性 Mechanical :

温度范围 Temperature Range:	-55° C - +85° C
接口 Connectors:	2.92-Female
相对湿度 Relative Humidity:	0 ~ 90%

### 外形尺寸 Outline Drawing:

Unit: mm

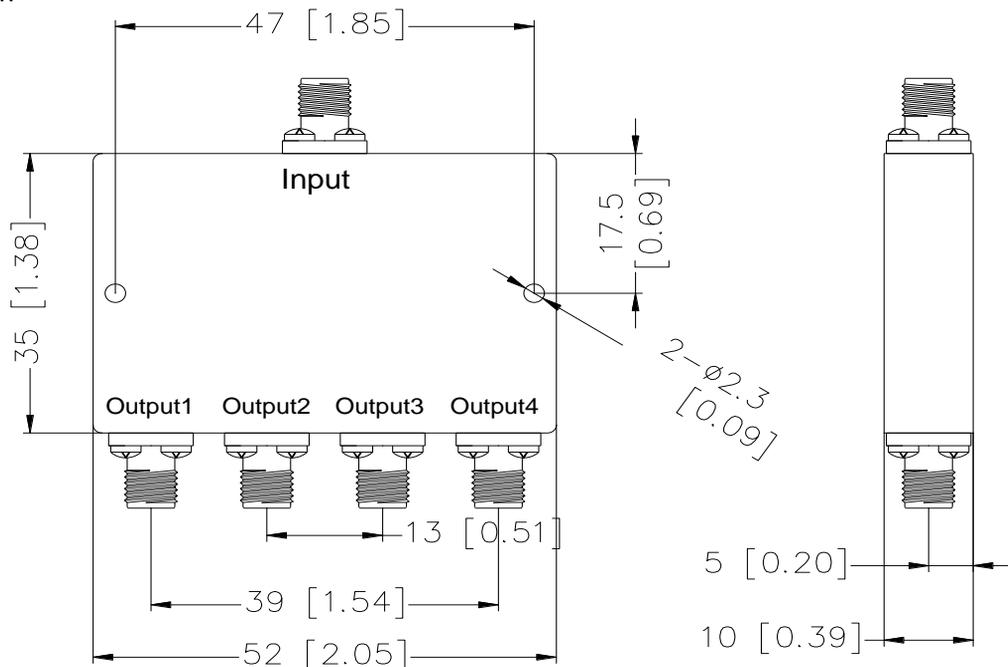



Turpanic Co, Ltd

Email: [johnny@turpanic.com](mailto:johnny@turpanic.com)

Mob/WeChat/WhatsApp: +8613088887527