

Power Divider/Combiner 5 Way SMA 50Ω 10.5 to 14.5GHz

电气特性 Electrical:

工作频率 Frequency Range: 10.5-14.5 GHz

插入损耗 Insertion Loss: $\leq 1.6\text{dB}$

驻波 VSWR: $\leq 1.7/1.5: 1$

隔离 Isolation: $\geq 18\text{dB}$

幅度平衡 Amplitude Balance: $\leq \pm 0.6\text{dB}$

相位平衡 Phase Balance: $\leq \pm 7^\circ$

耐功率 Power Handling: 30 Watt

方向功率 Reverse Power : 2 Watt

阻抗 Impedance: 50 OHMS

机械特性 Mechanical :


温度范围 Temperature Range: $-55^\circ\text{C} - +85^\circ\text{C}$

接口 Connectors: SMA-Female

相对湿度 Relative Humidity: 0 ~ 90%

外形尺寸 Outline Drawing:

Unit: mm

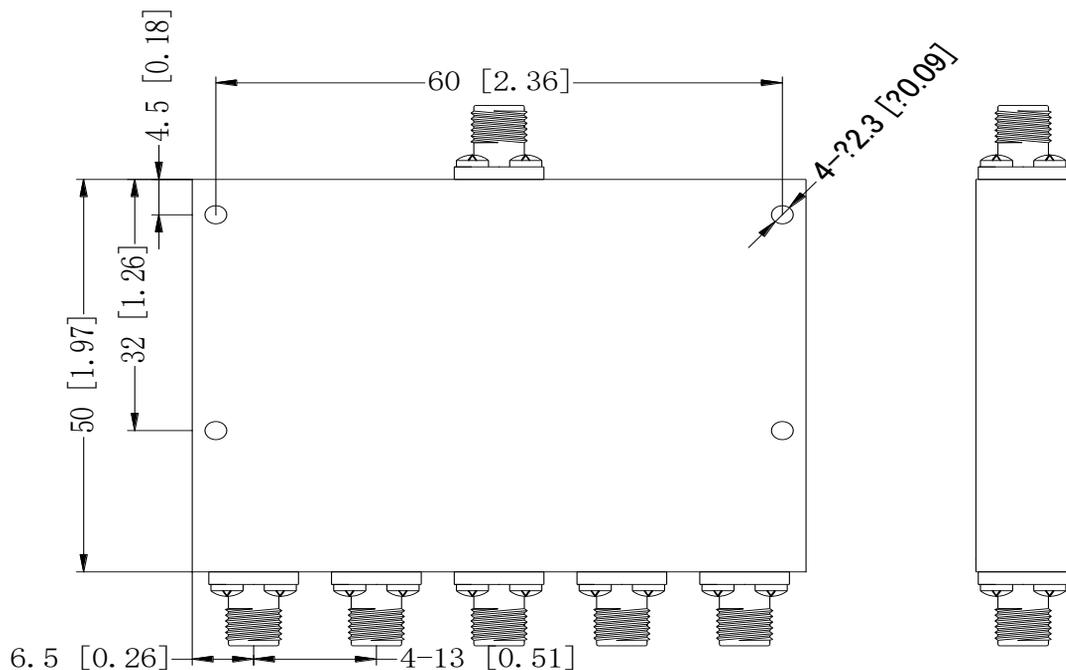

Trc2 S21 dB Mag 2 dB / Ref -18 dB Cal Invisible
Mem5[Trc2] S21 dB Mag 2 dB / Ref -18 dB Invisible

2 of 4 (Max)



Ch1 Start 10 GHz Pwr 0 dBm Stop 15 GHz

4/22/2020, 1:31 PM