

Power divider/Combiner 8Way SMA 50Ω 0.5 to 18 GHz

电气特性 Electrical:

工作频率 Frequency Range:	500-18000 MHz
插入损耗 Insertion Loss:	≤6.0dB
驻波 VSWR:	≤2.25 : 1
隔离 Isolation:	≥13dB
幅度平衡 Amplitude Balance:	≤±0.8dB
相位平衡 Phase Balance:	≤±12°
耐功率 Power Handling:	30 Watt
阻抗 Impedance:	50 OHMS








机械特性 Mechanical :

温度范围 Temperature Range:	-55° C - +85° C
接口 Connectors:	SMA-Female
相对湿度 Relative Humidity:	0 ~ 90%

外形尺寸 Outline Drawing:

Unit: mm

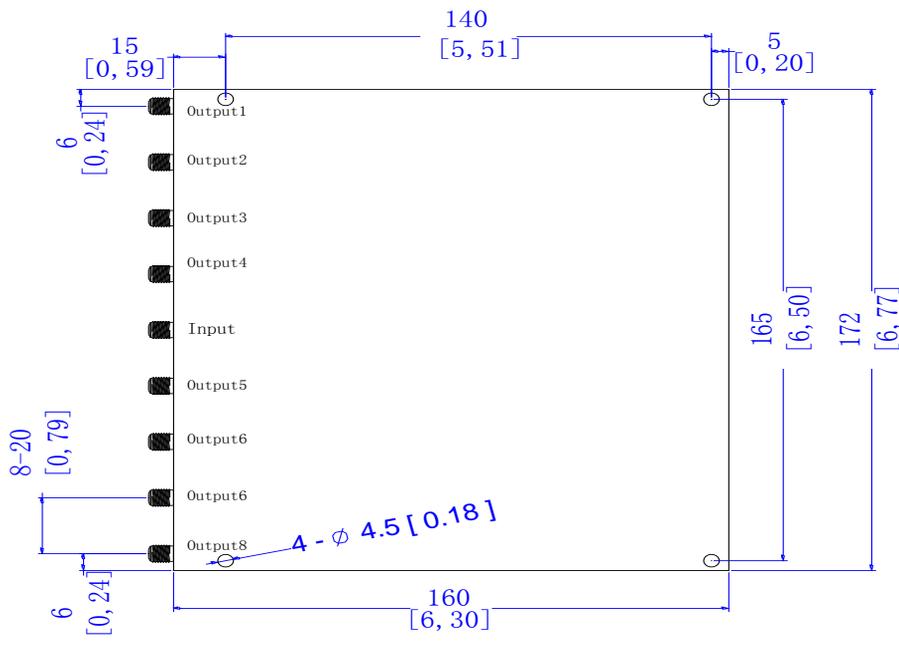


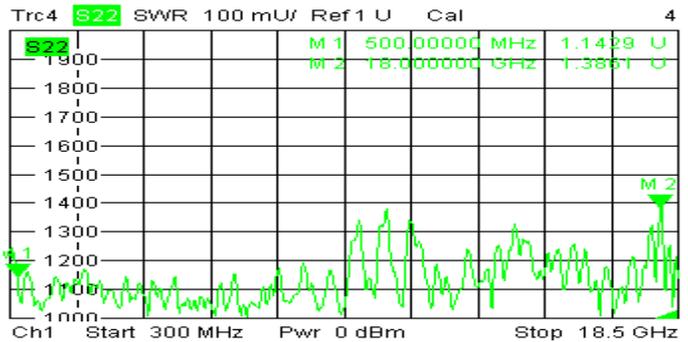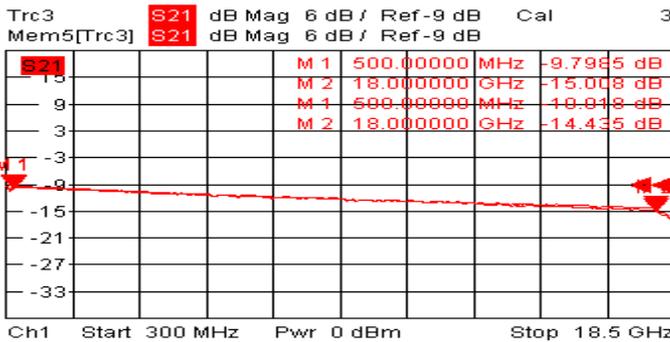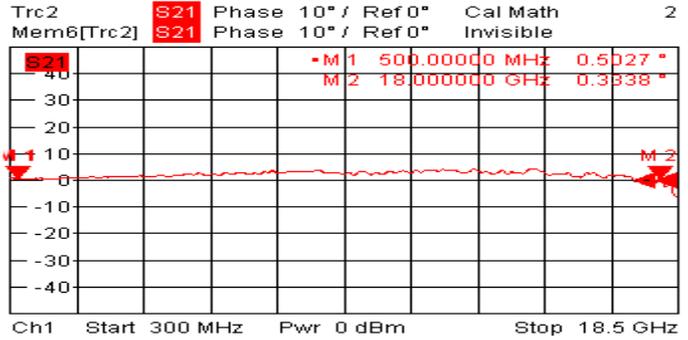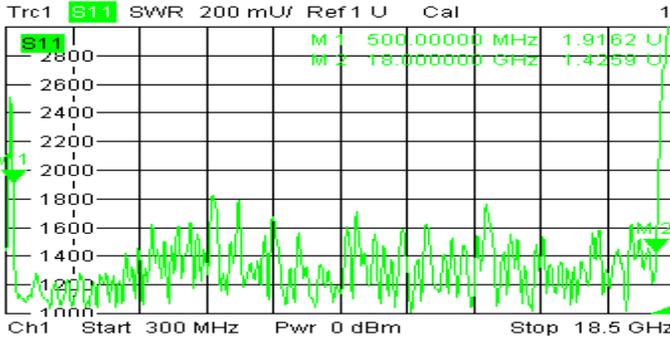

6/25/2019, 10:35 AM



Trc2 **S21** dB Mag 3.5 dB / Ref-13 dB Cal 2 of 4 (Max)
 Mem6[Trc2] **S21** dB Mag 3.5 dB / Ref-13 dB Invisible

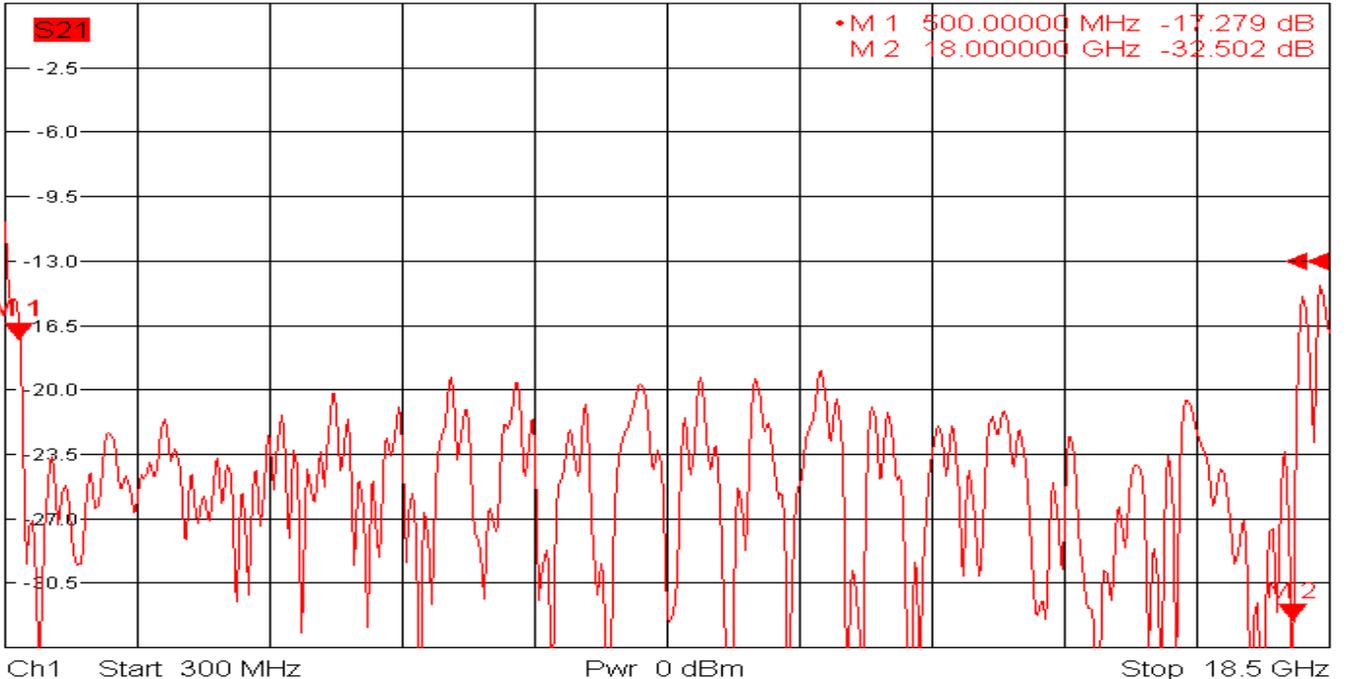

6/25/2019, 10:41 AM