

Power divider/Combiner 8 Way SMA 50Ω 8 to 12.4 GHz

电气特性 Electrical:


工作频率 Frequency Range: 8-12.4 GHz
 插入损耗 Insertion Loss: ≤1.4dB
 驻波 VSWR: ≤1.7/1.5: 1
 隔离 Isolation: ≥18dB
 幅度平衡 Amplitude Balance: ≤±0.6dB
 相位平衡 Phase Balance: ≤±5°
 耐功率 Power Handling: 30 Watt
 方向功率 Reverse Power : 2 Watt
 阻抗 Impedance: 50 OHMS

机械特性 Mechanical :

温度范围 Temperature Range: -55° C - +85° C
 接口 Connectors: SMA-Female
 相对湿度 Relative Humidity: 0 ~ 90%

外形尺寸 Outline Drawing:

Unit: mm

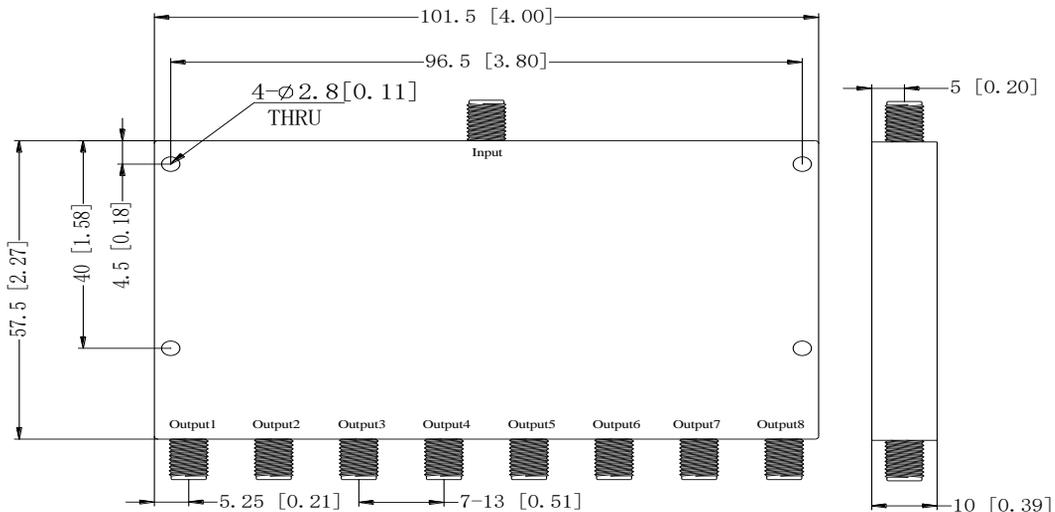



Turpanic Co, Ltd

Email: johnny@turpanic.com

Mob/WeChat/WhatsApp: +8613088887527