

Part No: SAXXA2-S-8


## SMA Attenuators • Male to Female • DC – 8 GHz-2W

### 电气特性 ELECTRICAL

- **Frequency Range** DC - 8 GHz
- **Attenuation (dB)** 1 through  $9 \pm 0.50$  dB (**4dB**、**7 dB** are not available)
  - $10 \pm 0.5$  dB
  - $15 \pm 0.5$  dB
  - $20 \pm 0.6$  dB
  - $25 \pm 0.6$  dB
  - $30 \pm 0.6$  dB
  - $40 \pm 1.0$  dB
- **VSWR (MAX)** DC - 8GHz.....1.25:1
- **Impedance** 50 Ohms
- **RF Power Rating** **Average** : 2 Watts at 25°C  
Ambient Temperature  
**PEAK** : 100 Watts  
(5  $\mu$ Sec Pulse Width , 0.05% Duty Cycle)

### 机械特性 MECHANICAL

- **Temperature Range** -20°C - +115°C
- **Connectors** Brass ,Nickel Plated
- **Connector Pins** Beryllium Copper, Gold Plated
- **Housing** Brass ,Nickel Plated
- **Insulators** PTFE , Virgin Electrical Grade

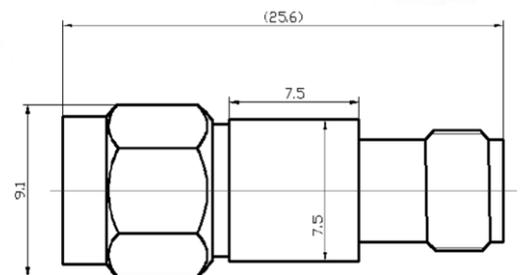

Unit : mm

### 订货信息 ORDER

Model Number: SAXXA2-S-8