

Coaxial Fixed Attenuator

N Female&Male/DC-4GHz

Model:TAXXA200-N-4

TAXXA200-N-4 is a 10/20/30/40/50 dB coaxial attenuator that is used in millimeterwave systems and operates from DC to 4 GHz.

Features:

- Operating Frequency DC to 4GHz
- Broadband Coverage
- Lost Cost

Applications:

- Test Lab
- Instrumentations
- System Integration


电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency Range	DC		4	GHz
衰减范围 Attenuation Range		10±1.2		dB
		20±0.8		dB
		30±0.8		dB
		40±0.8		dB
		50±1.0		dB
驻波 VSWR			1.25	:1
阻抗 Impedance		50		Ohms
射频功率值 RF Power Rating	200 Watts Average at 25°C			

环境和机械特性 Environmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
壳体材质 Body Material	Black, finned aluminum	
连接器材质 Connector Material	Nickel plated brass	
内导体 Inner Conductor	Gold-plated phosphor bronze	
接口 Connectors	N Female/Male	
尺寸 Size	68*70*259	mm

外形图 Outline Drawing: Unit:mm

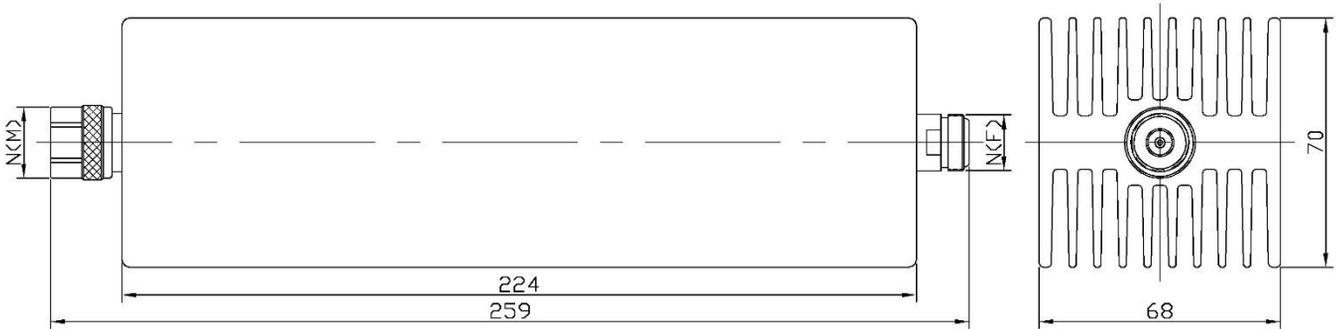

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description
TA10A200-N-4	Coaxial Fixed Attenuator, DC-4GHz, 10 ± 1.2 dB Attenuation
TA20A200-N-4	Coaxial Fixed Attenuator, DC-4GHz, 20 ± 0.8 dB Attenuation
TA30A200-N-4	Coaxial Fixed Attenuator, DC-4GHz, 30 ± 0.8 dB Attenuation
TA40A200-N-4	Coaxial Fixed Attenuator, DC-4GHz, 40 ± 0.8 dB Attenuation
TA50A200-N-4	Coaxial Fixed Attenuator, DC-4GHz, 50 ± 1.0 dB Attenuation