

Coaxial Fixed Attenuator

N Female&Male/DC-4GHz

Model:TAXXA50-N-4

TAXXA50-N-4 is a 3/6/10/20/30/40/50 dB coaxial attenuator that is used in millimeterwave systems and operates from DC to 4 GHz.

Features:

- Operating Frequency DC to 4GHz
- Broadband Coverage
- Lost Cost

Applications:

- Test Lab
- Instrumentations
- System Integration

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency Range	DC		4	GHz
衰减范围 Attenuation Range		3±0.4		dB
		6±0.4		dB
		10±0.4		dB
		20±0.4		dB
		30±0.4		dB
		40±0.5		dB
		50±0.6		dB
驻波 VSWR			1.20	:1
阻抗 Impedance		50		Ohms
射频功率值 RF Power Rating	50 Watts Average at 25°C			


环境和机械特性 Environmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temperature	-55 To +100	°C
壳体材质 Body Material	Black, finned aluminum	
连接器材质 Connector Material	Nickel plated brass	

环境和机械特性 Environmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
尺寸 Size	∅38*111	mm
重量 Weight	245	g

外形图 Outline Drawing: Unit:mm

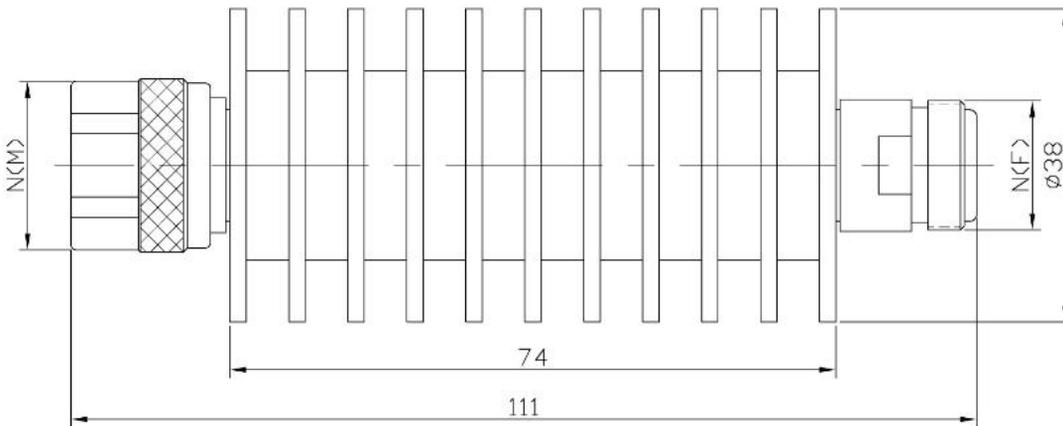

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description
TA03A50-N-4	Coaxial Fixed Attenuator, DC-4GHz, 3±0.4dB Attenuation
TA06A50-N-4	Coaxial Fixed Attenuator, DC-4GHz, 6±0.4dB Attenuation
TA10A50-N-4	Coaxial Fixed Attenuator, DC-4GHz, 10±0.4dB Attenuation
TA20A50-N-4	Coaxial Fixed Attenuator, DC-4GHz, 20±0.4dB Attenuation
TA30A50-N-4	Coaxial Fixed Attenuator, DC-4GHz, 30±0.4dB Attenuation
TA40A50-N-4	Coaxial Fixed Attenuator, DC-4GHz, 40±0.5dB Attenuation