

Low Noise Amplifier

1-18GHz/2.0dB NF/13dB Gain/14dBm P1dB

Model: TLLA1G18G-13-20

TLLA1G18G-13-20 is a low noise amplifier with a minimum small signal gain of 13 dB and a nominal noise figure of 2.0 dB across the frequency range of 1 to 18 GHz. The DC power requirement for the amplifier is +12V DC/50 mA. The input and output port configuration offers coax adapter structure with SMA female.

Features:

- Frequency range: 1-18GHz
- Gain: 13dB Min
- Noise Figure: 2.0dB Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Communication systems

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	1		18	GHz
小信号增益 Small Signal Gain	13	14		dB
增益平坦度 Gain Flatness		±1		dB
噪声系数 Noise Figure		2.0	2.5	dB
线性输出功率 Output P1dB	13	14		dBm
输入驻波 Input VSWR		2		:1
输出驻波 Output VSWR		2		:1
直流电压 DC Voltage	+8	+12	+15	V DC
直流电流 DC Supply Current		50		mA
阻抗 Impedance		50		Ohms

机械特性 Mechanical Specifications:


参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	
直流偏置 DC Bias	Solder Pin	

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+15 V
输入功率 RF Input Power	+20 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形图 Outline Drawing:

Unit:mm

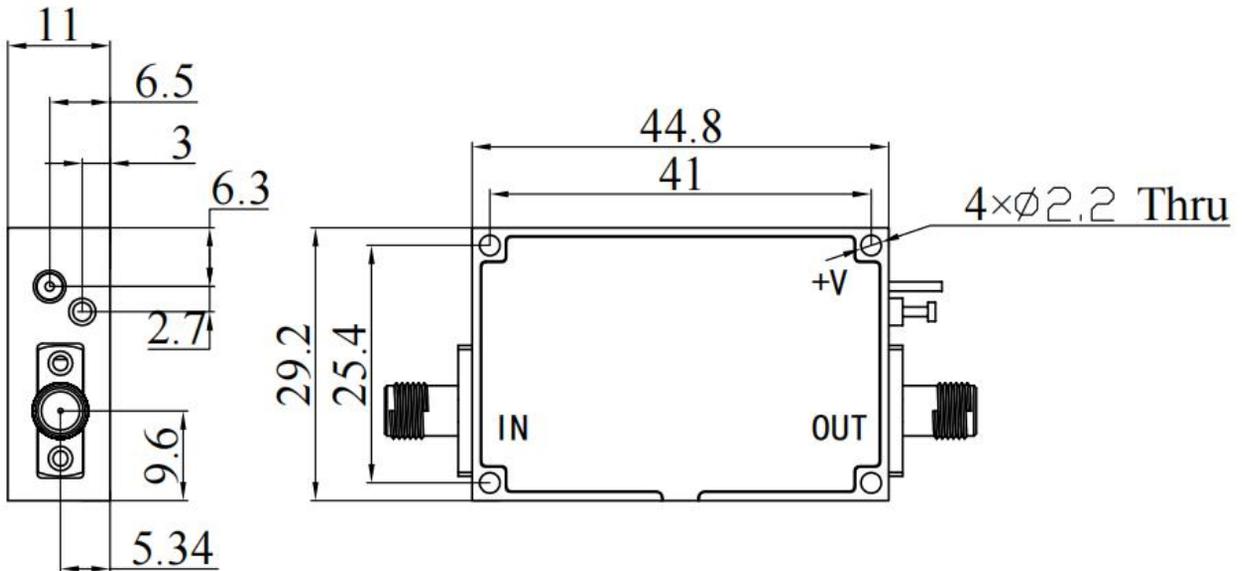

*****Heat Sink Required During Operation**



OBSERVE PRECAUTIONS
 ELECTROSTATIC SENSITIVE
 DEVICES

温度环境 Environmental Conditions:


参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-45		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude		10,000		feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			

订货信息 Ordering Information:


标准型号 Base Number	描述 Description	版本号 Revision
TLLA1G18G-13-20	Low Noise Amplifier,1-18GHz, Noise Figure:2.0dB, Gain:13dB,P1dB:14dBm,+12V DC,Without Heatsink	Rev.1.1
TLLA1G18G-13-20-HS	Low Noise Amplifier, 1-18GHz, Noise Figure:2.0dB, Gain:13 dB,P1dB:14dBm,+12V DC,With Heatsink	Rev.1.1

典型曲线 Typical Performance Data:

Gain&VSWR vs Frequency

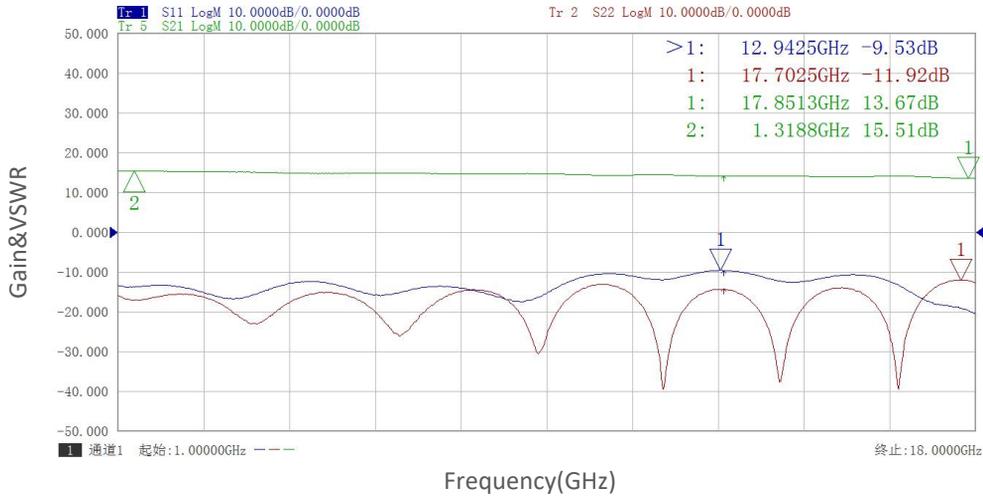


Noise Figure vs Frequency

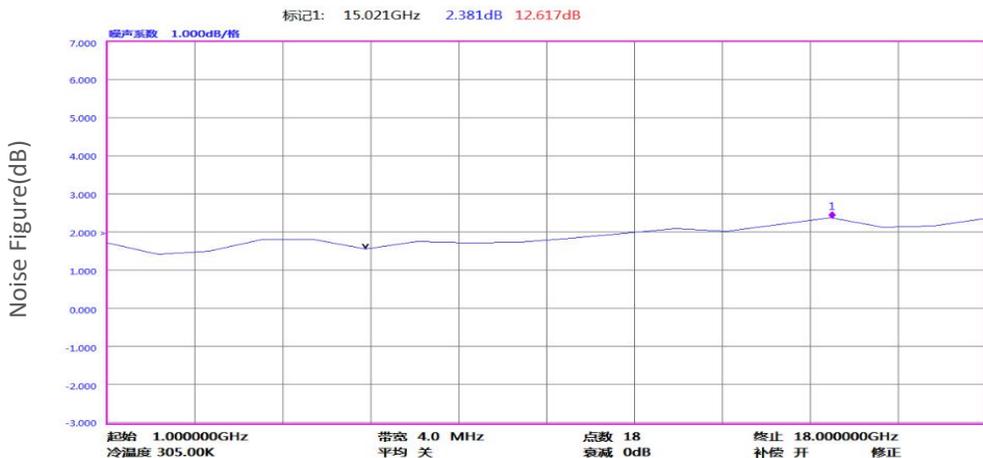


典型曲线 Typical Performance Data:

Gain vs Output Power

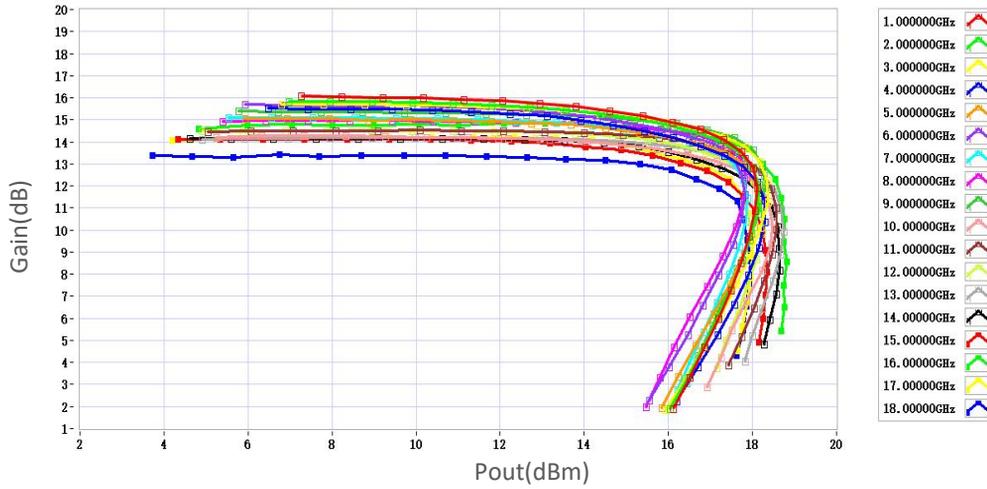


P1dB vs Frequency

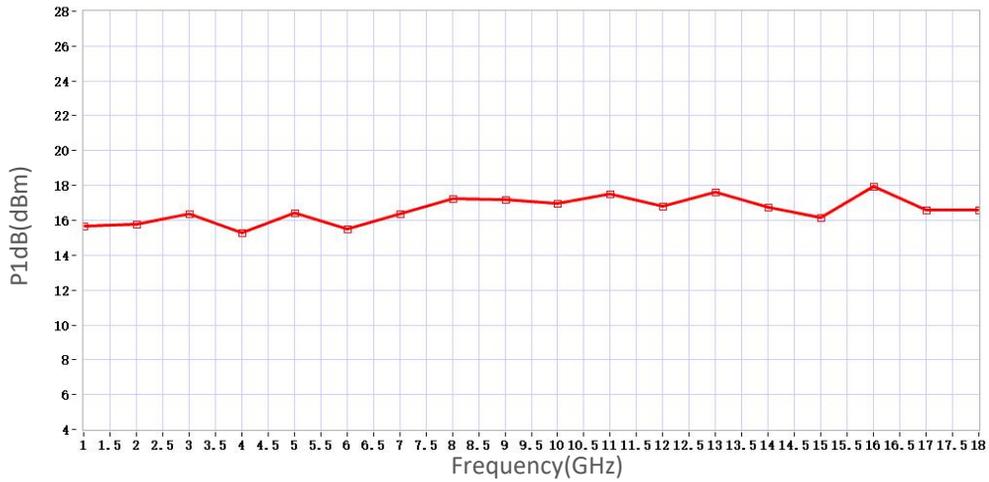

P3dB vs Frequency



典型曲线 Typical Performance Data:

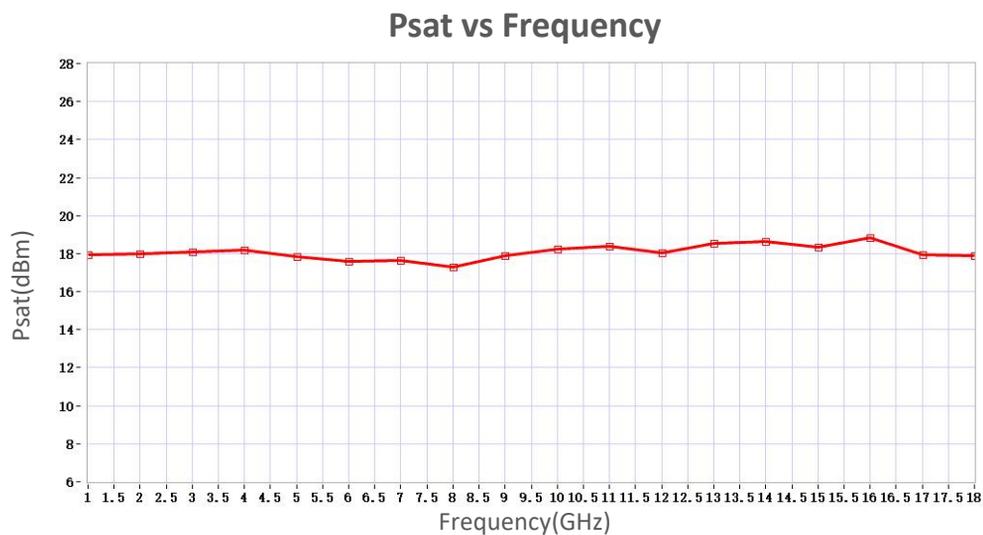

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.