

## Power Amplifier

0.3-6GHz/40dB Gain/32 dBm Psat

Model: TLPA300M6G-40-30

TLPA300M6G-40-30 is a power amplifier with a typical small signal gain of 42 dB and a nominal Psat of 32 dBm across the frequency range of 0.3 to 6 GHz. The DC power requirement for the amplifier is +12 VDC/700 mA. The input and output port configuration offers coax adapter structure with SMA female.

### Features:

- Frequency range: 0.3-6GHz
- Gain: 42dB Typ
- Output Power Psat: 32dBm Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

### Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

## 电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	300MHz-6GHz			
小信号增益 Small Signal Gain	40	42		dB
增益平坦度 Gain Flatness		±0.5	±1	dB
线性输出功率 Output P1dB	30	31		dBm
饱和输出功率 Output Psat		32		dBm
输入驻波 Input VSWR		1.8		:1
谐波 Harmonics@Pout=30dBm		-15		dBc
直流电压 DC Voltage		12	15	V DC
直流电流 DC Supply Current		700	1000	mA
阻抗 Impedance	50			Ohms

## 机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	100*50*15	mm
重量 Weight	140	g

## 绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+8 V
输入功率 RF Input Power	0 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

## 外形图 Outline Drawing: Unit:mm



### 温度环境 Environmental Conditions:


参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature*	-40		+60	°C
存储温度 Non-operating Temperature*	-50		+70	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

\*Note: For a wider temperature range, please consult the manufacturer.

### 订货信息 Ordering Information:


标准型号 Base Number	描述 Description	版本号 Revision
TLPA300M6G-40-30	Power amplifier 0.3-6GHz,Gain:40dB,P1dB:30dBm,+12V DC,Without Heatsink.	Rev.1.1
TLPA300M6G-40-30-HS	Power amplifier 0.3-6GHz,Gain:40dB,P1dB:30dBm,+12V DC,With Heatsink.	Rev.1.1

### 典型曲线 Typical Performance Data:

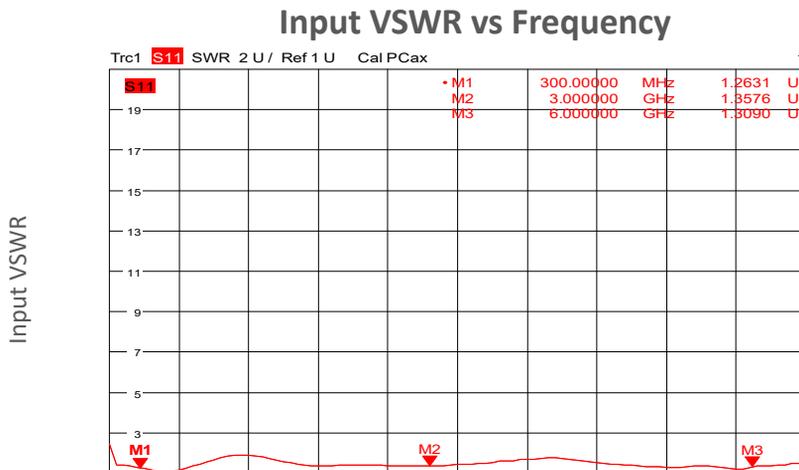


## 典型曲线 Typical Performance Data:


### Small Signal Gain vs Frequency

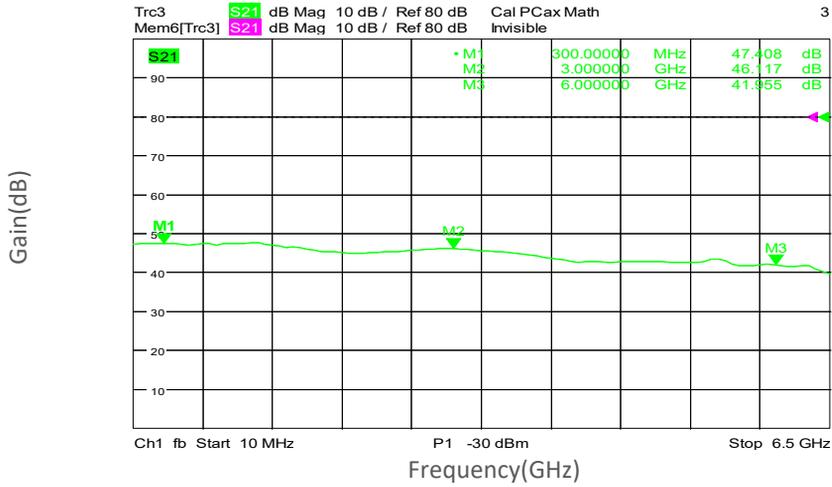

### Gain vs Output Power

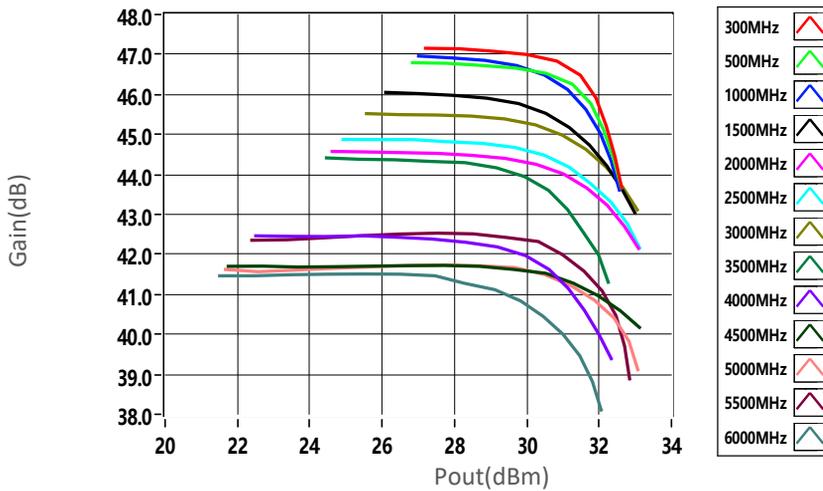


### PndB vs Frequency

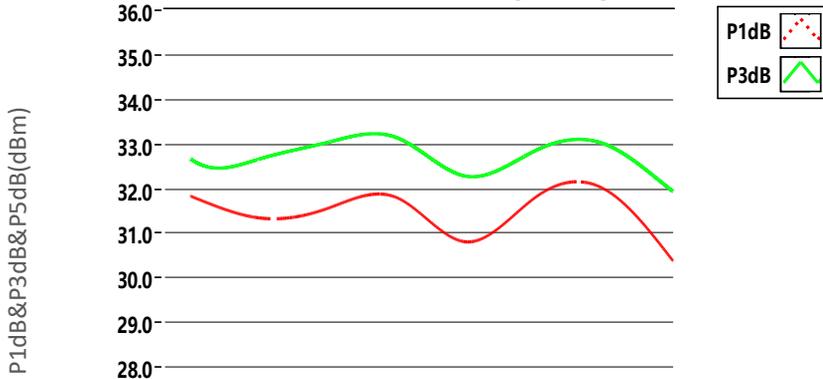


## 典型曲线 Typical Performance Data:

### 2nd Harmonics vs Output Power

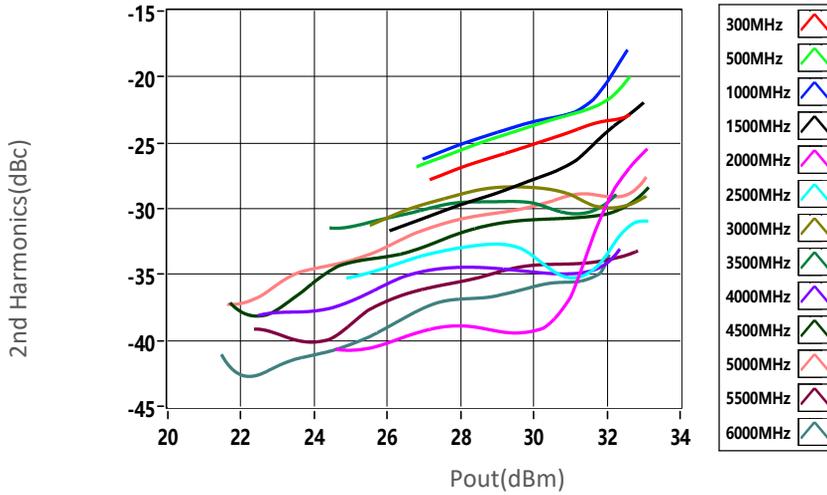

### 3rd Harmonics vs Output Power

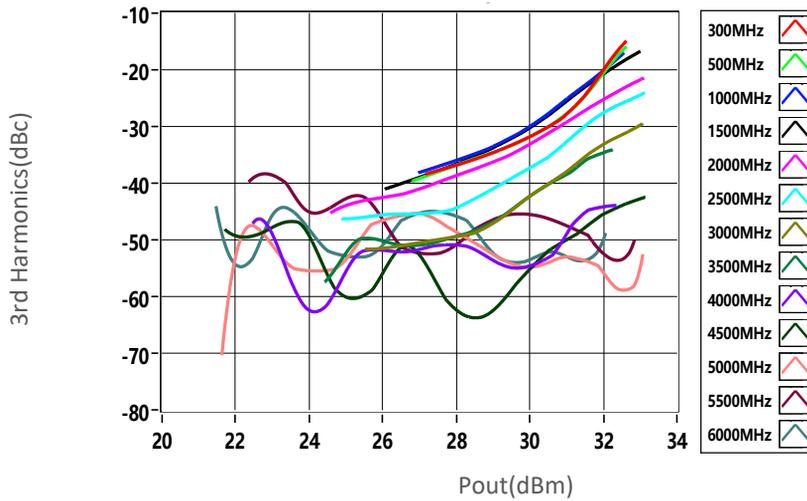

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.