

Power Amplifier

8-12GHz/45dB Gain/45dBm Psat

Model: TLPA8G12G-45-45

TLPA8G12G-45-45 is a power amplifier with a minimum power gain of 45 dB and a minimum Psat of 45 dBm across the frequency range of 8 to 12 GHz. The DC power requirement for the amplifier is +28 VDC/150 W. The input and output port configuration offers coax adapter structure with SMA female.

Features:

- Frequency range: 8-12GHz
- Gain: 45dB Min
- Output Power Psat: 45dBm Min
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

电气特性 Electrical Characteristics:

| 参数 Parameter | Min | Typ | Max | 单位 Units |
|--------------------------|------|-----|-----|----------|
| 频率范围 Frequency range | 8-12 | | | GHz |
| 功率增益 Power Gain | 45 | | | dB |
| 增益平坦度 Gain Flatness | | ±3 | | dB |
| 饱和输出功率 Output Psat | 45 | | | dBm |
| 杂散 Spurious@Pout=45dBm | | | -60 | dBc |
| 谐波抑制 Harmonic@Pout=45dBm | | | -15 | dBc |
| 输入驻波 Input VSWR | | | 2 | :1 |
| 直流电压 DC Voltage | | 28 | | V DC |
| 功耗 Power Consumption | | | 150 | W |
| 阻抗 Impedance | 50 | | | Ohms |

机械特性 Mechanical Specifications:




| 参数 Parameter | 指标 Value | 单位 Units |
|---------------------------------|---|----------|
| 输入/输出接口 Input /Output Connector | SMA Femlae/SMA Female | |
| 直流偏置 DC Bias | Feedthru capacitors | |
| 尺寸 Size | 150*90*20(Without heatsink) 188*125*155(With heatsink) | mm |
| 重量 Weight | ≤200 | g |

绝对最大值 Absolute Maximum Ratings:

| 参数 Parameter | 指标 Value |
|------------------------------|----------------------|
| 供电偏置电压 Supply Bias Voltage | +29 V |
| 输入功率 RF Input Power | +5 dBm |
| ESD灵敏度 ESD sensitivity (HBm) | Class 0, passed 150V |

外形图 Outline Drawing:

Unit:mm

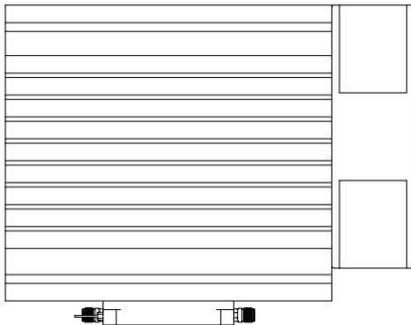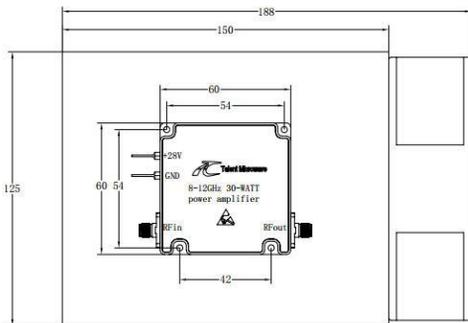

温度环境 Environmental Conditions:

| 参数 Parameter | Min | Typ | Max | 单位 Units |
|------------------------------------|---|-----|-----|----------|
| 操作温度 Operating Temperature* | -40 | | +50 | °C |
| 存储温度 Non-operating Temperature* | -50 | | +60 | °C |
| 相对湿度 Relative humidity | | 95 | | % |
| 海拔 Altitude | 10,000 | | | feet |
| 震动 Shock / Vibration(MIL-STD-810F) | 25g rms (15 degree 2KHz) endurance, 1 hour per axis | | | |
| 冲击 Shock(non operating) | 20G for 11msc half sin wave,3 axis both directions | | | |

*Note: For a wider temperature range, please consult the manufacturer.

订货信息 Ordering Information:

| 标准型号 Base Number | 描述 Description | 版本号 Revision |
|--------------------|---|--------------|
| TLPA8G12G-45-45 | Power amplifier 8-12GHz, Gain:45dB,Psat:45dBm,+28V DC,Without Heatsink | Rev.1.1 |
| TLPA8G12G-45-45-HS | Power amplifier 8-12GHz, Gain:45dB,Psat:45dBm,+28V DC,With Heatsink | Rev.1.1 |