


	<b>Product Specification</b>	<b>Product Model</b>
		<b>VNA-NMD1.85F-1.85F-25IN</b>



Physical & Mechanical Specifications			
Cable Outer Diameter	15.2 mm Max		
Min Bending Radius	50 mm		
Length	63cm (25inch)		
Connector	NMD1.85mm Female	1.85mm Female	
Recommended Torque	0.9 Nm	0.9 Nm	
Mating Times	>10000		
Temperature	-40+85°C		
Connector center Conductor Material/Plating	Beryllium Copper, Gold Plated		
Connector Body Material	Stainlessness steel , passivated		
Cable Dielectric Material	PTFE		
Cable Jacket	Multilayers jacket		
Electrical Specifications			
Frequency	DC-67GHz	Impedance	50Ohms
VSWR	1.4 Max	Insulation Resistance	5000 MΩ
Insertion loss	<5.2dB	Shielding Effectiveness	>90dB
Specification temperature	25°C	Voltage Withstand	500V,DC
Phase Stability	<±4°		
Amplitude Stability	<±0.05dB		

## Test Data

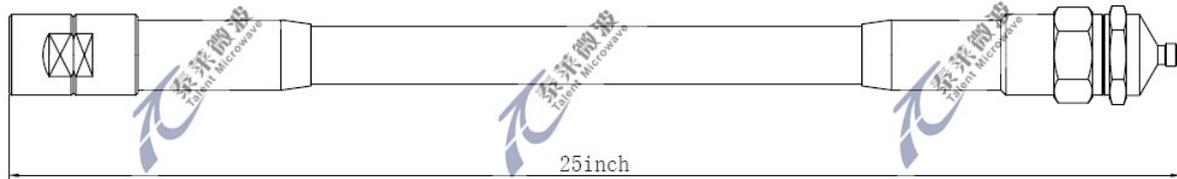