

## TLBend Ultra Flexible RF Cable Assembly

TLBend086H/2.4 Male /2.4 Male/DC-50GHz

-2.4M2.4M-L



### Features:

- Max Frequency 50GHz
- VSWR max of 1.35
- Velocity of Propagation of 76%

### Applications:

- Test & Measurement equipment
- Manufacturing lab
- WAN system equipment

### Cable Cross Section:

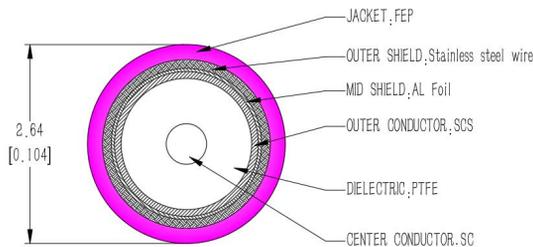

### Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency Range	DC		50	GHz
VSWR		1.25	1.35	:1
Velocity of propagation		76%		
Shielding Effectiveness	90			dB
Capacitance		95.2		pF/m
Phase Stability Vs. Flexure@26.5GHz		±5		°
Amplitude Stability Vs. Flexure@26.5GHz		±0.10		dB

### Environmental And Physical Characteristics:

Description	Parameter	Units
Cable Diameter	2.64	mm
Cable Jacket	FEP	
Min. Static Bending Radius	10.56	mm
Min. Repeated Bending Radius	26.4	mm
Operating Temperature	-55 to +165	°C
Storage Temperature	-55 to +165	°C

### Cable Performance By Frequency:


Frequency	1 GHz	2 GHz	4 GHz	6 GHz	8 GHz	10 GHz	12 GHz	18 GHz	26.5 GHz	35 GHz	40 GHz	50 GHz
-----------	-------	-------	-------	-------	-------	--------	--------	--------	----------	--------	--------	--------

Insertion Loss

### Connectors:

Description	Connector 1	Connector 2
Type	2.4mm Male	2.4mm Male
Contact Material And Plating	Beryllium Copper,Gold	Beryllium Copper,Gold
Dielectric Type	PEI	PEI
Body Material And Plating	Passivated Stainless Steel	Passivated Stainless Steel
Insertion Loss (dB Max)	$0.05 * \sqrt{f\_GHz}$	$0.05 * \sqrt{f\_GHz}$

### Outline Drawing:

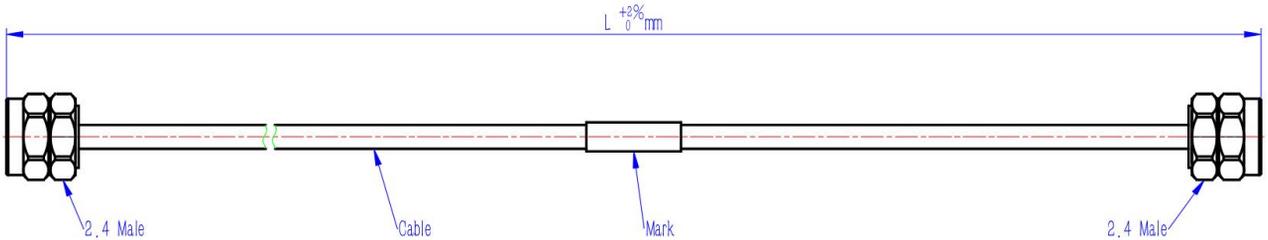

### Ordering Information:

Base Number	Lenth (Inches)
TURbend086H-2.4M2.4ML	-L

### Standard Model:

Part#	L (Inch)	2 GHz		12.4 GHz		18 GHz		26.5 GHz		40 GHz		50 GHz	
		VSWR	IL(dB)	VSWR	IL(dB)	VSWR	IL(dB)	VSWR	IL(dB)	VSWR	IL(dB)	VSWR	IL(dB)
TURbend086H-2.4M2.4ML	3	1.15	0.14	1.20	0.35	1.25	0.42	1.30	0.51	1.30	0.64	1.35	0.72
TURbend086H-2.4M2.4ML	4	1.15	0.16	1.20	0.40	1.25	0.49	1.30	0.60	1.30	0.75	1.35	0.84
TURbend086H-2.4M2.4ML	6	1.15	0.20	1.20	0.52	1.25	0.63	1.30	0.77	1.30	0.96	1.35	1.09
TURbend086H-2.4M2.4ML	8	1.15	0.25	1.20	0.63	1.25	0.77	1.30	0.94	1.30	1.18	1.35	1.33
TURbend086H-2.4M2.4ML	10	1.15	0.29	1.20	0.74	1.25	0.91	1.30	1.11	1.30	1.39	1.35	1.58
TURbend086H-2.4M2.4ML	12	1.15	0.33	1.20	0.86	1.25	1.04	1.30	1.29	1.30	1.61	1.35	1.82
TURbend086H-2.4M2.4ML	14	1.15	0.38	1.20	0.97	1.25	1.18	1.30	1.46	1.30	1.82	1.35	2.06
TURbend086H-2.4M2.4ML	16	1.15	0.42	1.20	1.08	1.25	1.32	1.30	1.63	1.30	2.04	1.35	2.31
TURbend086H-2.4M2.4ML	18	1.15	0.46	1.20	1.20	1.25	1.46	1.30	1.80	1.30	2.25	1.35	2.55