


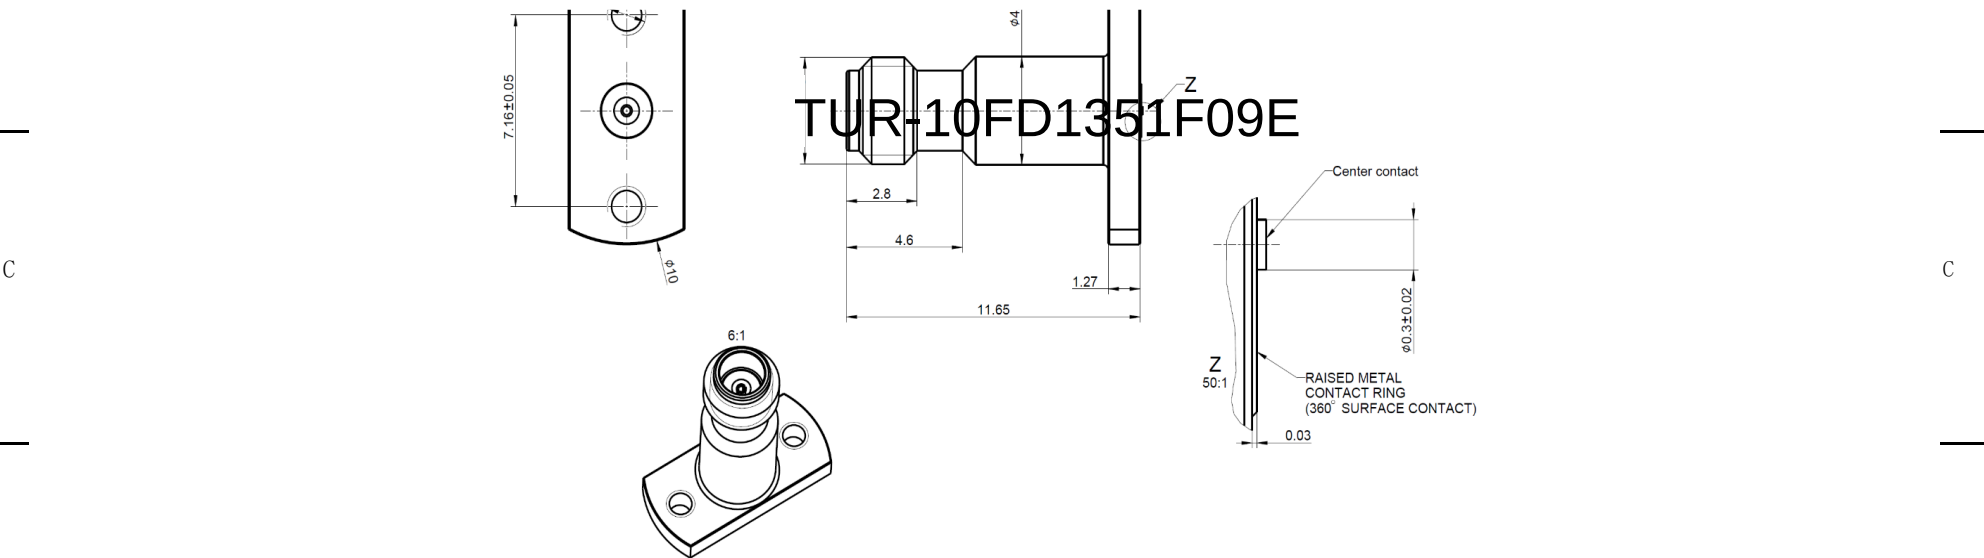

Electrical & Environmental Characteristics	
Impedance	50 Ohm
Insulation Resistance	5000 MΩ
Operating Frequency	DC-110GHz
Dielectric Withstanding Voltage	500V
Retention Loss	≥22dB,DC to 40 GHz
	≥18dB,40 GHz to 67GHz
	≥14dB,67 GHz to 110 GHz
Insertion Loss	0.05* $\sqrt{f_GHz}$
Operating Temperature	- 40~+85℃
Material & Coat-Plating	
Outer Contact	Stainless steel,
	PassivatedCuBe, Gold plating

THIS DRAWING IS A CONTROLLED DOCUMENT		DWN	Turpanic Co, Ltd		,Inc
		CHK			
Unit	TOLERANCES UNLESS APVD	Product Model			
mm	OTHERWISE SPECIFIED				
	0 PLC ±0.25	TUR-10FD1351F09E			
	1 PLC ±0.15	1.0mm Female Straight Connector For PCB			
	2 PLC ±0.12				
	3 PLC ±-				
	3 PLC ±-	PRODUCT			
	ANGLES ±1°	SPEC			
		APPLICATO			
		N SPEC			
		SIZE	GAGE CODE	DRAWING NO	
				A	