

TUR-12WCA1.0ECU

Features:

- Operating Frequency 60 to 90GHz
- Lower Insertion Loss and VSWR
- Instrumentation Grade
- DC Short Circuit

Applications:

- Test Lab
- Instrumentations
- Sub-assemblies



电气特性 Electrical Characteristics:


参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency Range	60		90	GHz
驻波 VSWR		1.3		:1
插损 Insertion Loss		0.4		dB
耐功率 Power Handling			2	W

环境和机械特性 Envrionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temerature	-40 To +85	℃
存储温度 Storage Temerature	-40 to +85	℃
材质 Material	Brass	
表面处理 Finish	Gold Plated	
同轴接口 Coax Connector	1.0mm Female	
波导 Waveguide	WR12/UG-387/U-M	

外形图 Outline Drawing:

Unit:mm

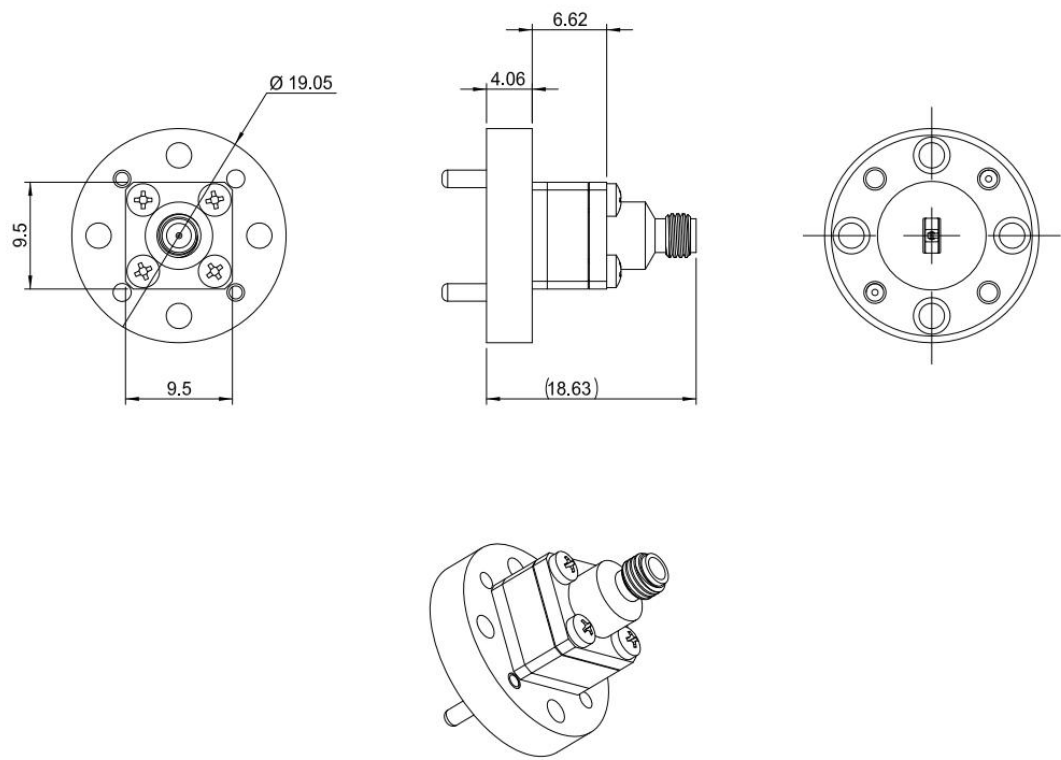

订货信息 Ordering Information:

标准型号 Base Number	描述 Desciption	版本号 Revision
TUR-12WCA1.0ECU	Waveguide to Coax Adapter, End Launch WR12/1.0mm Female,60-90GHz	Rev.1.2

典型曲线 Typical Performance Data:

