

TUR-19WCA1.85R

Features:

- Operating Frequency 40 to 60GHz
- Lower Insertion Loss and VSWR
- Instrumentation Grade
- DC Short Circuit

Applications:

- Test Lab
- Instrumentations
- Sub-assemblies


电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency Range	40		60	GHz
驻波 VSWR			1.6	:1
插损 Insertion Loss		0.8		dB

机械特性 Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
材质 Material	Copper	
表面处理 Finish	Gold Plated,Blue paint	
同轴接口 Coax Connector	1.85mm Female	
波导 Waveguide	WR19/UG-383/U-M	

外形图 Outline Drawing: Unit:mm

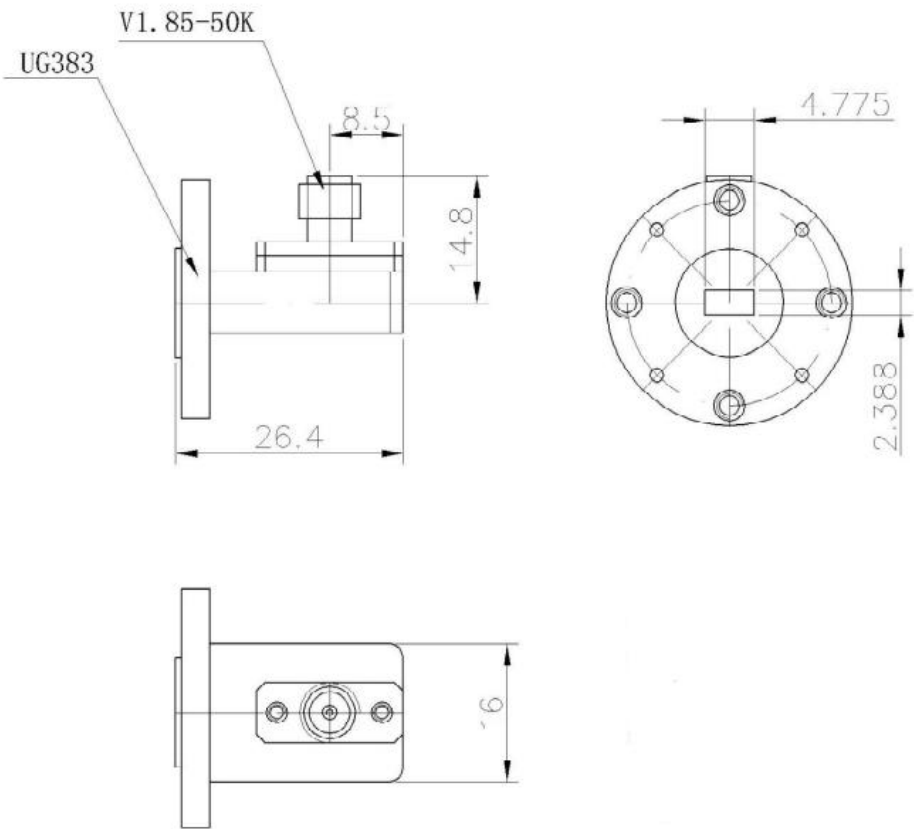

订货信息 Ordering Information:

标准型号 Base Number	描述 Desciption	版本号 Revision
TUR-19WCA1.85R	Waveguide to Coax Adapter, Right Angle WR19/1.85mm Male,40-60GHz	Rev.1.1