

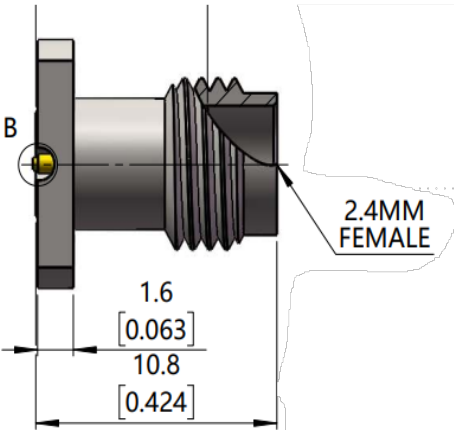


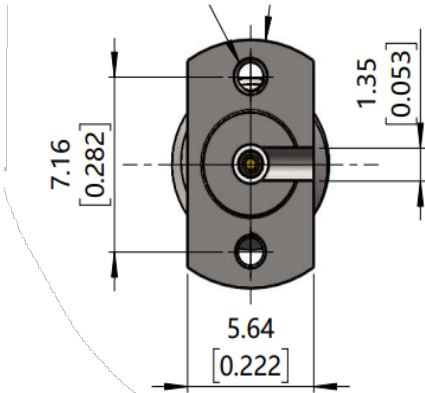

TalentMW

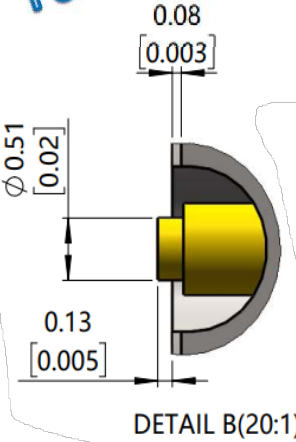

Electrical & Environmental Characteristics	
Impedance	50 Ohm
Insulation Resistance	5000 MΩ
Operating Frequency	DC~50 GHz
Dielectric Withstanding Voltage	750 Vrms
VSWR	≤1.20:1
Insertion Loss	≤0.4 dB
Operating Temperature	-55~+165℃

Material & Coat-Plating	
Inner Conductor	Beryllium Copper, Gold
Dielectric	PEI

THIS DRAWING IS A CONTROLLED DOCUMENT		DWN	Turpanic Co, Ltd ,Inc
		CHK	
Unit mm	TOLERANCES UNLESS OTHERWISE SPECIFIED	APVD	Product Mode
	0 PLC ±0.25	PRODUCT SPEC	TUR-24FD1351F09 2.4mm Female Straight Connector For PCB
	1 PLC ±0.15		
	2 PLC ±0.12		
	3 PLC ±-		
	3 PLC ±-	APPLICATO N SPEC	
	ANGLES ±1°		