


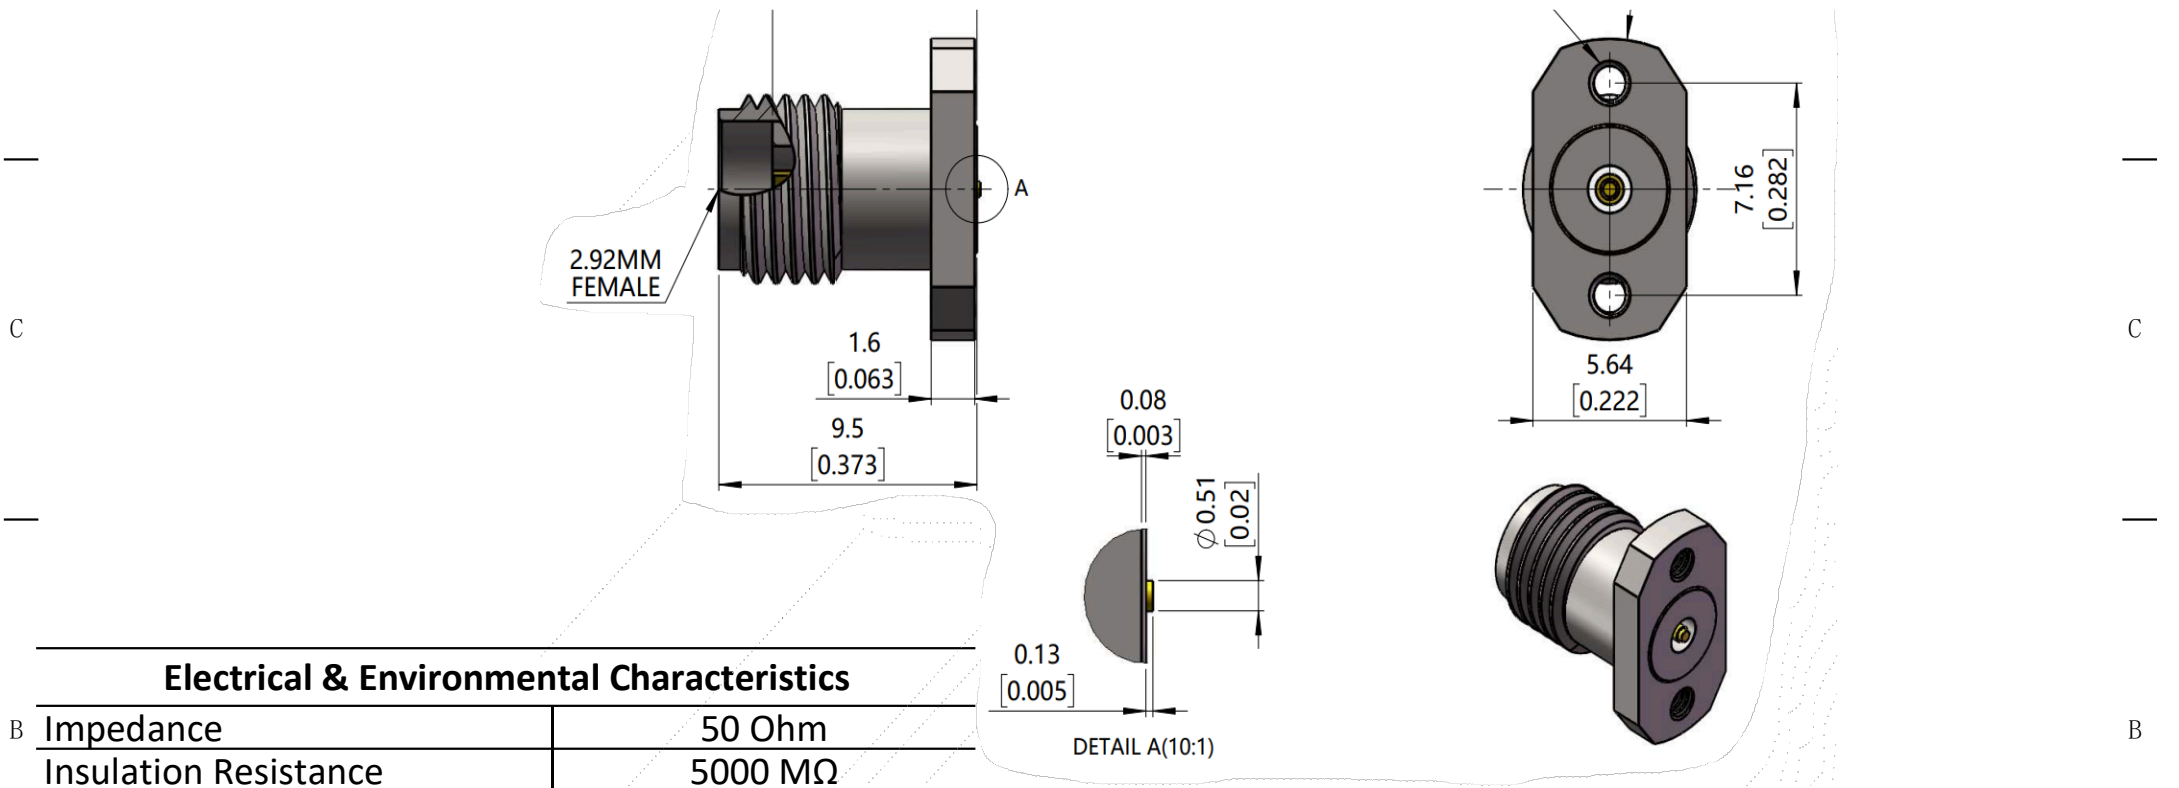

Electrical & Environmental Characteristics	
Impedance	50 Ohm
Insulation Resistance	5000 MΩ
Operating Frequency	DC~40 GHz
Dielectric Withstanding Voltage	1000 Vrms
VSWR	≤1.20:1
Insertion Loss	≤0.4 dB
Operating Temperature	-55~+165℃
Material & Coat-Plating	
Inner Conductor	Beryllium Copper, Gold
Dielectric	PEI

THIS DRAWING IS A CONTROLLED DOCUMENT		DWN	Turpanic Co, Ltd ,Inc
		CHK	
Unit	TOLERANCES UNLESS OTHERWISE SPECIFIED	APVD	Product Mode
mm	0 PLC ±0.25		TUR-29FD1351F09E 2.92mm Female Straight Connector For PCB
	1 PLC ±0.15		
	2 PLC ±0.12	PRODUCT SPEC	
	3 PLC ±-		
	3 PLC ±-		
	ANGLES ±1°		
		APPLICATO N SPEC	
		SIZE	GAGE CODE