
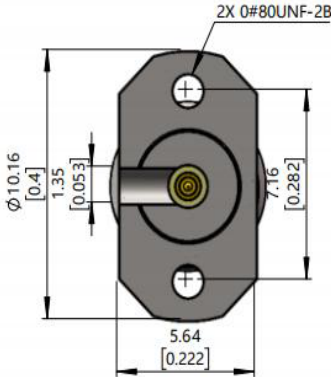


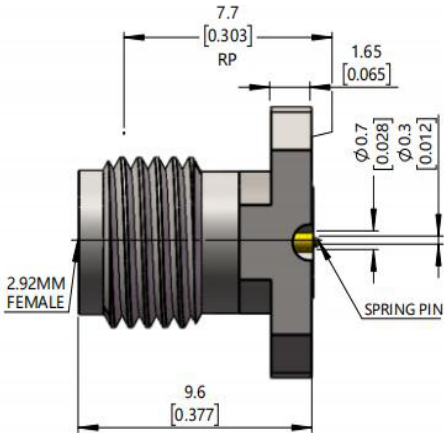

Electrical & Environmental Characteristics	
Impedance	50 Ohm
Insulation Resistance	5000 MΩ
Operating Frequency	DC-40GHz
Dielectric Withstanding Voltage	500V
VSWR	≤1.2
Insertion Loss	≤0.05* $\sqrt{f_{GHz}}$
Operating Temperature	- 55~+165 °C
Material & Coat-Plating	
Inner Conductor	BeCu C17300 GOLD PLATE
Dielectric	PEI

THIS DRAWING IS A CONTROLLED DOCUMENT		DWN	Turpanic Co, Ltd ,Inc	
		CHK		
Unit mm	TOLERANCES UNLESS OTHERWISE SPECIFIED	APVD	Product Model TUR-29FD1351F09SP SPRING PIN	
	0 PLC ±0.25	PRODUCT SPEC		
	1 PLC ±0.15			
	2 PLC ±0.12			
	3 PLC ±			
3 PLC ±	APPLICATION SPEC	DRAWING NO		
ANGLES ±1°				
MATERIAL SEE TABLE	FINISH SEE TABLE	WEIGHT	SIZE A4	GAGE CODE 0T8L4
CUSTOMER DRAWING				
SCALE 4: SCALE 4: 1 SHEET1 OF 1 RVE 1				