


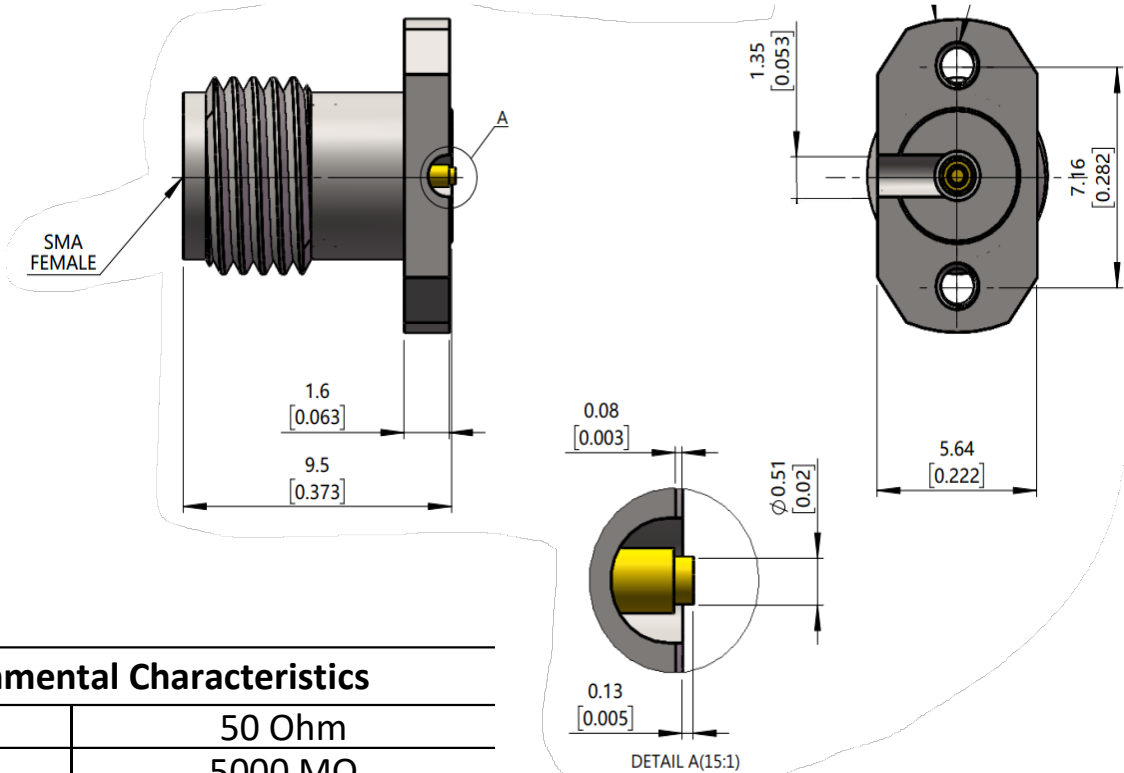

Electrical & Environmental Characteristics

Impedance	50 Ohm
Insulation Resistance	5000 MΩ
Operating Frequency	DC~27 GHz
Dielectric Withstanding Voltage	500 Vrms
VSWR	≤1.20:1
Insertion Loss	≤0.4 dB
Operating Temperature	-55~+165℃

Material & Coat-Plating

Inner Conductor	Beryllium Copper, Gold
Dielectric	PTFE

THIS DRAWING IS A CONTROLLED
DOCUMENT

DWN

CHK

Turpanic Co, Ltd ,Inc

Unit
mm

TOLERANCES UNLESS
OTHERWISE SPECIFIED

0 PLC ±0.25
1 PLC ±0.15
2 PLC ±0.12
3 PLC ±-
3 PLC ±-
ANGLES ±1°

APVD

PRODUCT
SPEC

APPLICATO
N SPEC

Product Mode

TUR-SAFD1351F09

SMA Female Straight Connector For
PCB